# MOEN

#### DESCRIPTION

- Dualmount application: Drop in or Undermount
- Sink: 18 Gauge stainless steel, brushed finish, 1 hole
- Minimum Cabinet Size: 36'
- Overall sink dimension 33" x 22" x 9"
- Bowl: 29-13/16" x 16-1/2" x 9"
- Corner radius: R15
- 3-1/2" diameter recessed drain opening
- Soundshield™ undercoating maximizes sound deadening and inhibits condensation

#### INCLUDED

- Faucet: Pulldown faucet in Spot Resist™ Stainless finish
- Drop-in hardware for top mount installation

#### SOLD SEPARATELY

- Drain
- Undermount installation clips

#### **CUT OUT DIMENSIONS**

- Cut out dimensions are 32-3/8" x 21-3/8", with a 3/8" corner radius (top mount)
- Cut out template (undermount) included
- A tolerance of plus/minus 1/16" is acceptable

#### **STANDARDS**

• Third party certified by IAPMO to meet ASME A112.19.3/CSA B45.4 and all applicable specifications referenced therein

#### **FAUCET STANDARDS**


- Third party certified to ASME A112.18.1/CSA B 125.1, and all applicable requirements referenced therein including NSF 61/9 & 372
- Meets CalGreen and Georgia SB8370 requirements
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- The backflow protection system in the device consists of two independently operating check valves, a primary and a secondary which prevents backflow
- ADA for lever handle

#### WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 10 year limited warranty when used in a multifamily installation
- 5 year limited warranty when used in a commercial installation
- Visit www.moen.com/support for complete details and limitations

## Installation Detail

## **Drop-in (Top Mount)**




# **Specifications**




# **KENADITM**

Single Bowl Dual Mount Sink with Pulldown Faucet

**MODELS:** 21597

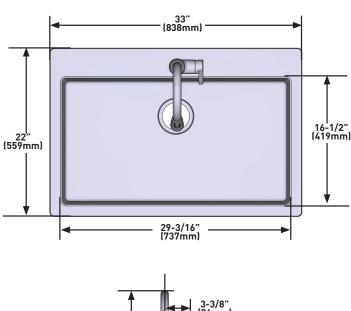



**CRITICAL DIMENSIONS** DO NOT SCALE