

DESCRIPTION

- Various finishes identified by suffix
- Magnetix™ technology features an innovative magnetic docking system
- Includes rainshower, handshower, hose and magnetic docking system
- 60" double interlock spiral hose (metal), for Chrome and Spot Resist Brushed Nickel finishes
- 19" slide bar push button height selection
- 1/2" IPS connection

OPERATION

- Rainshower is single function, Handshower is six functions
- Rotate outer ring to select function
- 3-way diverter provides ability to flow each shower head separately or combined for more coverage
- Pause/trickle button allows to momentarily pause the handshower flow at a push of a button
- Handshower cradle rotates to adjust angle of handshower

FLOW


- 1.75 gpm 6.6 L/min) @ 80 psi max. for both Showerhead and Handheld

STANDARDS

- Designed and manufactured to comply with the applicable requirements of ASME A112.18.1/CSA B-125.1, and all applicable specifications referenced therein
- Products marked with 1.75 gpm are compliant with California water efficiency regulations
- Meets ADA when installed in accordance with the standard.
Consult your local building department for the specific installation requirements

WARRANTY



- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multifamily installation
- 5 year limited warranty when used in a commercial installation
- Visit www.moen.com/support for complete details and limitations

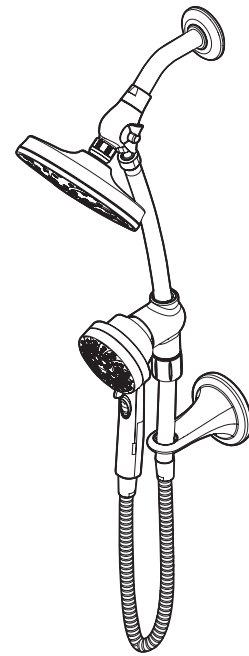

ENGAGE™

Magnetix Rainshower with Handheld Combo Slide Bar

MODELS: 28501EP Series

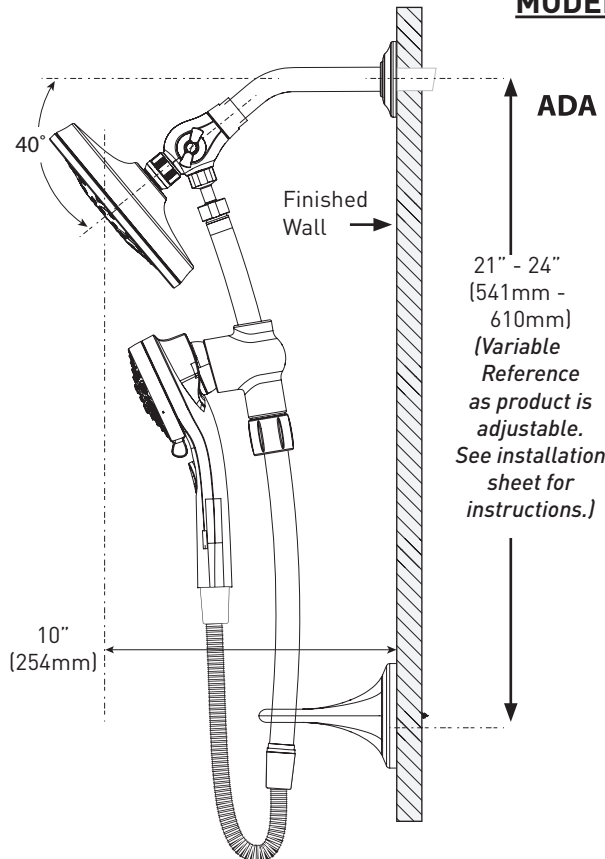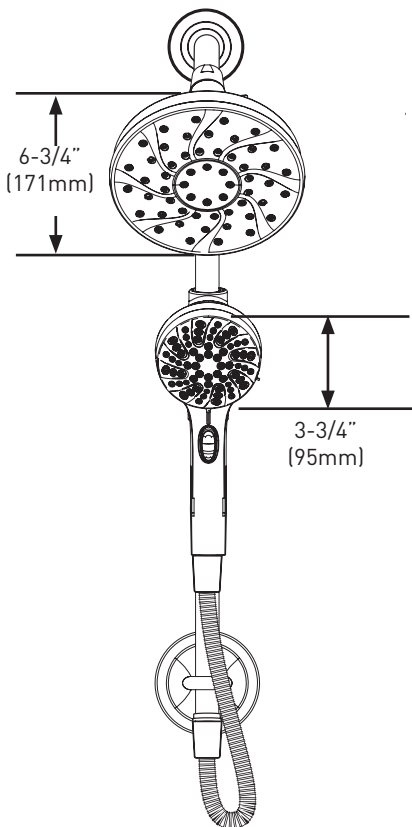

CRITICAL DIMENSIONS DO NOT SCALE