

DESCRIPTION

- Various finishes identified by suffix
- Magnetix™ technology features an innovative magnetic docking system
- Includes handshower, hose and magnetic docking system
- 60" double interlock spiral metal hose (for 230H2 series)
- Assembled with 2 check valves for backflow prevention
- Hot Water Saving Handheld helps reduce water warm up waste

DISCLAIMER

- Hot Water Saving Handheld is not intended as an anti-scald device. Once water reaches desired warm/hot temperature and full flow button is reengaged, user may experience temperature fluctuation. Always check water temperature before using Moen Hot Water Saving Handheld showerhead.

OPERATION

- To save water warm up waste:
 - 1.) Activate "CONSERVE" button before starting shower.
 - 2.) Turn shower handle position to desired warm water temperature. Once water temp reaches 95°F (35°C) the shower head will reduce flow to a trickle to save water warm up waste.
 - 3.) Activate "FLOW" button to resume the shower (1.75gpm).

FLOW


- Flowrate for EP suffix model is 1.75 gpm

STANDARDS

- Third party certified to ASME A112.18.1/CSA B-125.1, ASSE 1014 and all applicable specifications referenced therein

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 5 year limited warranty when used in a commercial installation
- 10 year limited warranty when used in a multifamily installation
- Visit www.moen.com/support for complete details and limitations

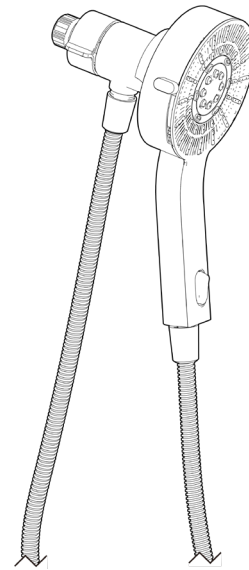

Hot Water Saving Handheld

MODELS: 230H2EP Series

