MOEN[®]

SPECIFICATIONS

DESCRIPTION

- Metal construction with various finishes identified by suffix
- 3/8" compression cold water inlet connection
- Tube connections to hot water tank
- Open vent faucet Intended to be used with Moen IH2300 Instant Hot Water Tank

OPERATION

- Two step handle operation prevents accidental activation
- Handle button operates with less than 5 lbs. force

FI NW

• Flow is limited to 1.5 gpm (5.7 L/min) at 60 psi

CARTRIDGE

• Ceramic disc cartridge

STANDARDS

 Third part certified to ASME A112.18.1-CSA B125.1 and all applicable requirements referenced therein including NSF61/9 & 372 and ASSE 1023

WARRANTY

• 3 year limited warranty


Visit www.moen.com/support for complete details and limitations



SIPTMModern Instant Hot Faucet

MODELS: IH7660 Series

NOTE:THIS FAUCET IS DESIGNED TO BE INSTALLED THROUGH 1 HOLE, 1-1/4" (32mm) MIN. DIA.

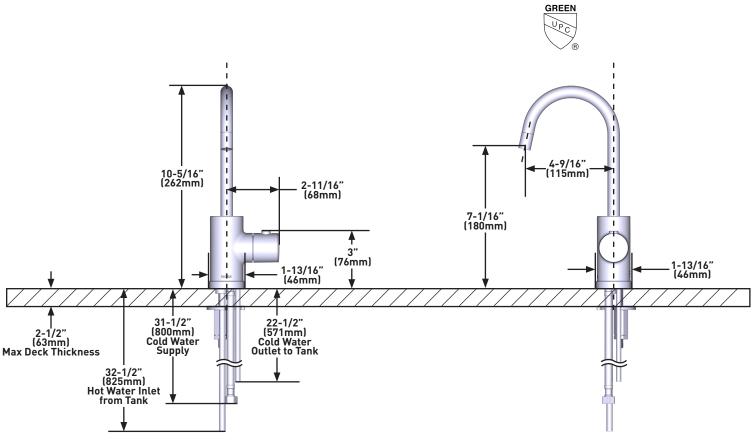

CRITICAL DIMENSIONS DO NOT SCALE