

## SPECIFICATIONS

### DESCRIPTION

- Power Boost™ Spray Technology
- Reflex™ pulldown system offers smooth operation, easy movement and secure docking
- Metal construction with Spot Resist Stainless™ finish
- Duralock™ quick connect system
- Pulldown spray with 68" braided hose
- Flexible supply lines with 3/8" compression fittings
- High arc spout provides height and reach to fill or clean large pots while pull down wand provides the maneuverability for cleaning or rinsing
- 360° rotating spout

### OPERATION

- Lever-style handle
- Temperature controlled by 100 arc of handle travel
- Operates with less than 5 lbs. of force
- Operates in stream or spray mode in the docked or retracted position

### FLOW

- Flow is limited to 1.5 gpm (5.7 L/min) at 60 psi

### CARTRIDGE


- 1255 Duralast™ Cartridge for Single-Handle Faucets

### STANDARDS

- Third party certified to IAPMO Green, ASME A112.18.1/CSA B-125.1 and all applicable requirements therein including NSF 61/9 & 372
- Meets CalGreen and Georgia SB370 requirements
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- ADA for lever handle
- The backflow protection system in the device consists of two independently operating check valves, a primary and a secondary which prevent backflow

### WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multifamily installation
- 5 year limited warranty when used in a commercial installation

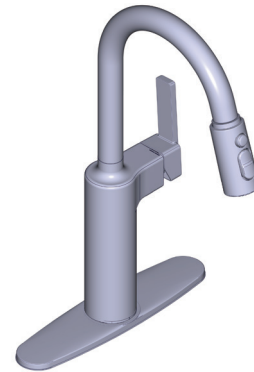

### Nilain™

#### Single Handle Pulldown Kitchen Faucet

**MODEL:** 87978SRS

**NOTE:** This faucet is designed to be installed through 1 or 3 holes, 1-1/2" min dia.

