

DESCRIPTION

- Metal construction with various finishes identified by suffix
- Pressure balancing cycle valve design with an adjustable temperature limit stop
- 1/2" IPS/CC connections
- Includes valve, showerhead, tub spout, arm, flange, escutcheon, and handle

OPERATION

- Lever style handle
- Handle operates counterclockwise through a 270° arc with off at 6 o'clock and maximum hot at the 9 o'clock position. Shut off in clockwise direction
- Adjustable temperature limit stop to control maximum hot water temperature
- Pressure balancing mechanism maintains selected discharge temperature to $\pm 3^\circ\text{F}$ ($\pm 2^\circ\text{C}$)
- Infiniti(TM) dial allows users to precisely adjust their preferred balance of force and coverage

FLOW

- Showerhead is limited 1.75 gpm (6.7 L/min) at 45 psi

CARTRIDGE


- 1222 cartridge design
- Nonmetallic/nonferrous and stainless steel materials
- Accommodates back to back installations

STANDARDS

- Third party certified to meet ASSE 1016, ASME A112.18.1/CSA B125.1, and all applicable requirements referenced therein
- Meets Watersense® criteria
- ADA ♿ for lever handle
- Meets New York City Local Law No. 57
- Products marked with 1.75 gpm are compliant with Watersense®, and California water efficiency regulations

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
 - 10 year limited warranty when used in a multifamily installation
 - 5 year limited warranty when used in a commercial installation
- Visit www.moen.com/support for complete details and limitations

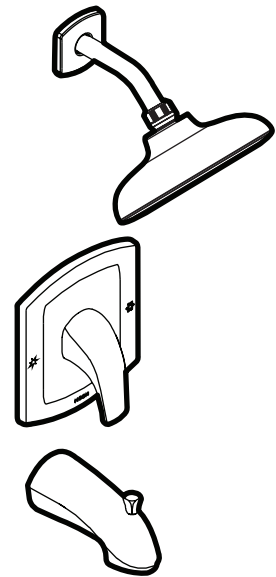

ZARINA™
Posi-Temp®

Single-Handle Tub/Shower

MODELS: 82534 series

