

DESCRIPTION

- Cartridge Filtration System
 - Height: 28-3/4" (730 mm)
 - Width: 15-3/8" (391 mm)
 - Depth: 7-7/8" (200 mm)
- Connection size: 1" NPT
- Includes 2 cartridges 4.5" (114mm) diameter x 20" (508mm) length
 - Sediment Cartridge: 5 micron melt-blown polypropylene cartridge designed to filter sediment
 - CTO Cartridge: 5 micron carbon block cartridge designed to reduce chlorine, taste, and odor (CTO)
- Recommended bathrooms: up to 7+

OPERATION


- Replace filter every 12 months
- pH Range: 6.5-9.5
- Pressure: 7.5-80 PSI
- Temperature: 39-113°F
- Flow: up to 20 GPM

STANDARDS

- Third party certified to NSF61 and NSF372

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a residential installation. Visit www.moen.com/support for complete details and limitations

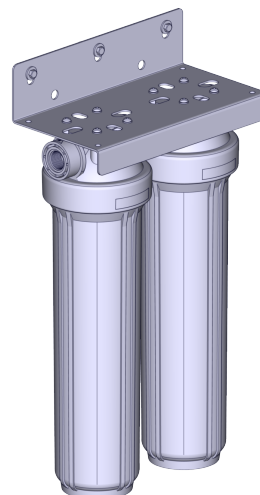

Moen®

**Whole Home Cartridge System
CTO + Sediment**

MODELS: FCAR01

