

DESCRIPTION

- Replacement cartridges for FCAR01 cartridge system
- Includes 2 cartridges
 - Sediment Cartridge: 5 micron melt-blown polypropylene cartridge designed to filter sediment
 - CTO Cartridge: 5 micron carbon block cartridge designed to reduce chlorine, taste, and odor (CTO)
- Cartridge Diameter: 4-1/2" (114mm)
- Cartridge Height: 20" (508mm)
- Includes replacement o-ring and lubricant for each cartridge

OPERATION


- Replace filters every 12 months
- pH Range: 6.5-9.5
- Pressure: 7.5-80 PSI
- Temperature: 39-113°F
- Flow: up to 20 GPM

STANDARDS

- Third party certified to NSF61 and NSF372

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a residential installation. Visit www.moen.com/support for complete details and limitations

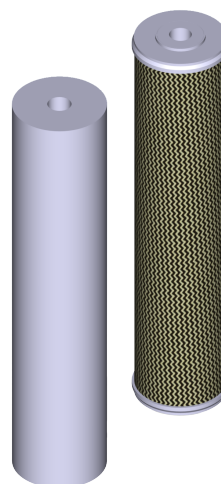

Moen®

FCAR01 Cartridge Replacement

MODELS: FFIL03

