

## DESCRIPTION

- Lithium-Ion Battery Backup for all Flo Smart Water Monitor and Shutoff devices
- Used in the event of a main power disruption
- When AC power is available, the battery backup passes 12 VDC to your Flo Smart Water Monitor and Shutoff and maintains battery charge level. If there is an AC line disruption, your Flo Smart Water Monitor and Shutoff will immediately be powered by the battery backup.
- Powers your Flo Smart Water Monitor & Shutoff device up to 4 hours without power
- Extends your Flo Smart Water Monitor and Shutoff power cord by 6'
- Rated for Indoor use only (and no direct sun light exposure)
- For use only with Flo Smart Water Monitor & Shutoff Power Adapter
- 2.1mm x 5.5mm DC power female (input) x 2.1mm x 5.5mm DC Power Male (output)
- Battery capacity rating 10.905V 6.8Ah 74.154Wh
- Primary charging voltage: 12 VDC
- Charging time: 5~6.5 hrs under standard conditions
- **Note:** Flo Smart Water Monitor and Shutoff device is sold separately

## OPERATION

- Status LED:
  - Solid Green = Full charge, AC Power Adapter Present
  - Blinking Green = Charging Battery Backup
  - Blinking Red = No AC Power, Operating as Battery Backup
  - Solid Red = Battery depleted, needs to be charged and/or error

## STANDARDS

- Third-party certified by TUV to UL 2054, CSA 22.2 No. 62133.2,
- Dangerous Goods Classification : UN3480
- UN38.3 Compliant
- Prop 65


## WARRANTY

- Moen® warrants that the product will be free from defects in materials and
- Workmanship for a period of one (1) year from the date of fabrication following the date printed on the product label.
- Visit [moen.com/customer-support/warranty](http://moen.com/customer-support/warranty) for complete details and limitations



## Installation Notes:

- To install, simply plug the Flo Smart Water Monitor and Shutoff device into the battery backup and plug the battery backup into the Flo AC power supply. No pairing or additional setup is needed.
- Operating temperature: Battery Backup must not be installed where the ambient temperature can exceed 113°F [45°C] or below 32°F [0°C]
- Battery Backup SHOULD NOT be installed outdoors or in places exposed to direct sunlight and not to be installed in poorly ventilated locations.
- Please note that delivery may be delayed as applicable laws and regulations require that these materials may be shipped via ground transportation rather than air.
- This product cannot ship by Air Freight. Only ground shipping is permitted.

### 1. Without the Battery Backup

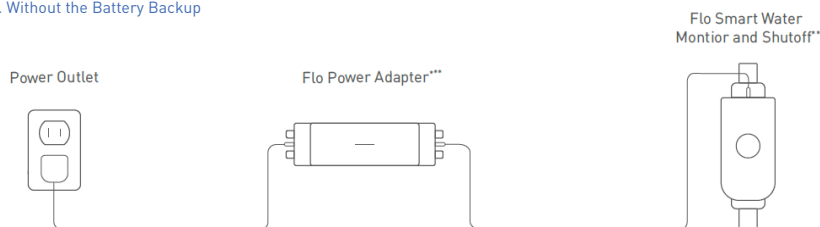

### 1. With the Battery Backup

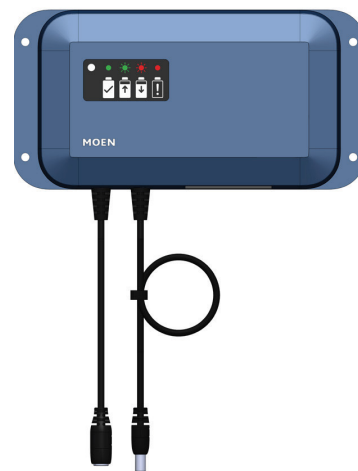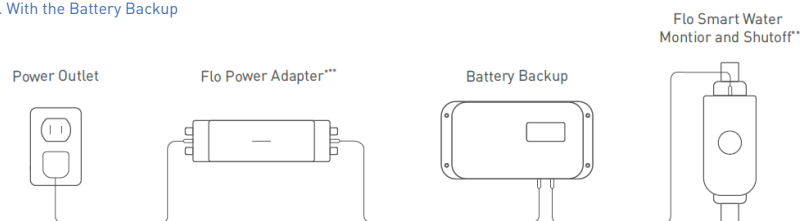

## Flo Smart Water Monitor & Shutoff Battery Backup Accessory

**MODEL:** 920-008

### Dimensions

#### Battery Backup

L 7 1/2" x W 3 3/4" x T 2"  
(L 188.00mm x W 95.80mm x T 50.00mm)

**Input cable length:**  
4" (100mm)

**Output cable length:**  
72" (1830mm)