



Buy it for looks. Buy it for life.®

*There is more than 1 version of this model.
Page down to identify the version you have.*

DESCRIPTION

- Metal construction with finishes identified by suffix
- Installed on 6" (152mm) to 16" (406mm) centers
- 1/2" IPS connections
- Diverter valve includes an integral vacuum breaker
- Includes metal pop-up type waste assembly

OPERATION

- Lever style handles
- Hot side counterclockwise to open (clockwise to close)
- Cold side clockwise to open (counterclockwise to close)
- Water flow is diverted by turning the knob clockwise for rim fill and counterclockwise for rosetta spray

CARTRIDGE

- 116719 diverter cartridge
- 1234 cartridge design for hot and cold valves
- Nonmetallic and stainless steel material


STANDARDS

- Third party certified to meet ASME A112.18/CSA B-125.1 and all requirements referenced therein
- ADA  for lever handles

WARRANTY

- Limited Lifetime warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

Specifications

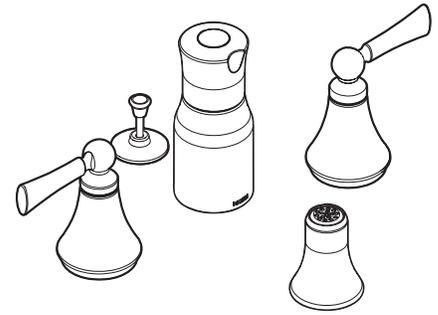


WYNFORD™ Two Handle Bidet with Metal Waste Assembly

Models: T5245 series (lever handle)

Valve: 9200

NOTE: Can not be used with Non Rim Flush Bidet Fixtures

NOTE: Minimum Diameter Holes for Installation
Diverter Valve - 1-1/8" (29mm)
Handle Valves - 1-1/8" (29mm)
Spray Nozzle - 5/8" (16mm)
Lift Rod Escutcheon - 1/2" (13mm)

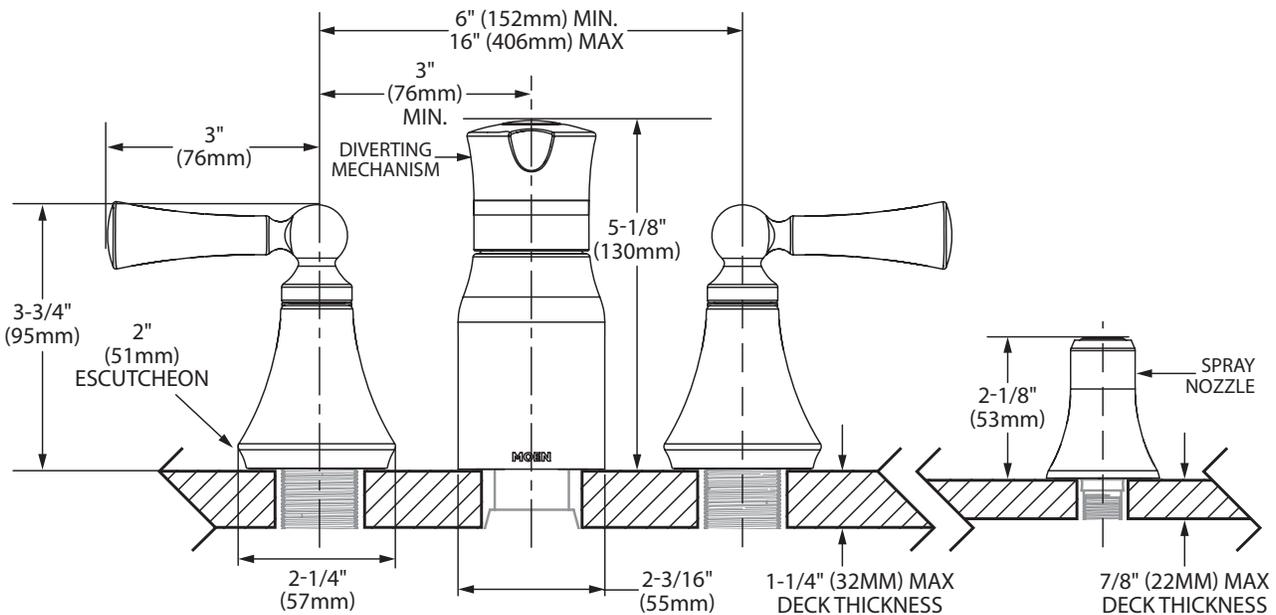

CRITICAL DIMENSIONS

(DO NOT SCALE)



Buy it for looks. Buy it for life.®

Specifications

DESCRIPTION

- Metal construction with finishes identified by suffix
- Installed on 6" (152mm) to 16" (406mm) centers
- 1/2" IPS connections
- Diverter valve includes an integral vacuum breaker
- Includes metal pop-up type waste assembly

OPERATION

- Lever style handles
- Hot side counterclockwise to open (clockwise to close)
- Cold side clockwise to open (counterclockwise to close)
- Water flow is diverted by turning the knob clockwise for rim fill and counterclockwise for rosetta spray

CARTRIDGE


- 94831 diverter cartridge
- 1224 cartridge design for hot and cold valves
- Nonmetallic and stainless steel material

STANDARDS

- Third party certified to meet ASME A112.18/CSA B-125.1 and all requirements referenced therein
- ADA  for lever handles

WARRANTY

- Limited Lifetime warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

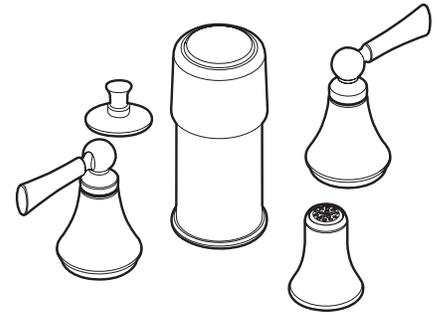


WYNFORD™ Two Handle Bidet with Metal Waste Assembly

Models: T5245 series (lever handle)

Valve: 9200

NOTE: Can not be used with Non Rim Flush Bidet Fixtures

NOTE: Minimum Diameter Holes for Installation
Diverter Valve - 1-1/8" (29mm)
Handle Valves - 1-1/8" (29mm)
Spray Nozzle - 5/8" (16mm)
Lift Rod Escutcheon - 1/2" (13mm)

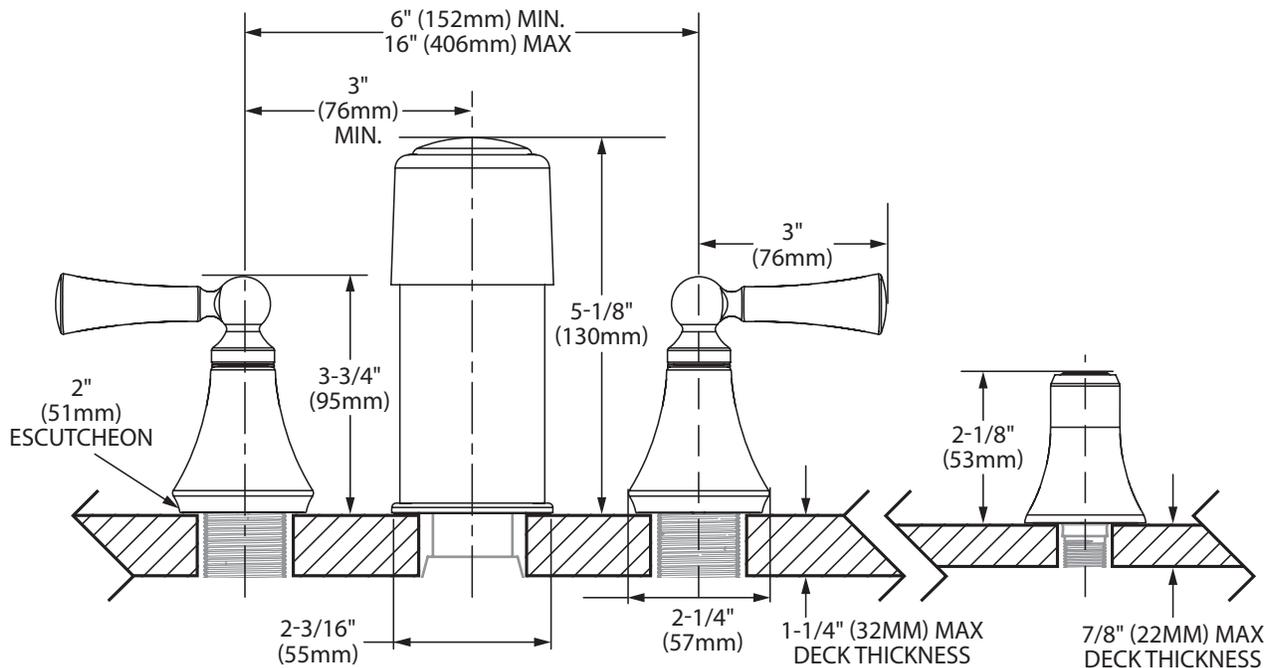

CRITICAL DIMENSIONS

(DO NOT SCALE)