

Buy it for looks. Buy it for life.®

There is more than 1 version of this model. Page down to identify the version you have.

#### DESCRIPTION

- · Metal construction with a chrome plated finish.
- Includes shower arm, flange, non-metalic shower head and non-metallic diverter tub spout

## **OPERATION**

- Handle operates counterclockwise through a 270° arc with off at 6 o'clock and maximum hot at the 9 o'clock position. Shut off in clockwise direction
- Adjustable temperature limit stop to control maximum hot water temperature
- Pressure balancing mechanism maintains selected discharge temperature to ± 3°

## **FLOW**

Showerhead is limited to 1.75 gpm at 80 psi

## **CARTRIDGE**

- 1222 cartridge design
- Accommodates back to back installations
- · Nonmetallic/nonferrous and stainless steel material

## **STANDARDS**

- Third party certified to meet CSA B125.1, ASSE 1016, ASME A112.18.1, ANSI A117.1 and all applicable requirements referenced therein
- ADA for lever handle

## WARRANTY


- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

# Specifications



WATER-SAVING CHATEAU® POSI-TEMP® Single-Handle Tub/Shower Trim Kit

Model: TL188 (Bulk Packed 12 per carton)

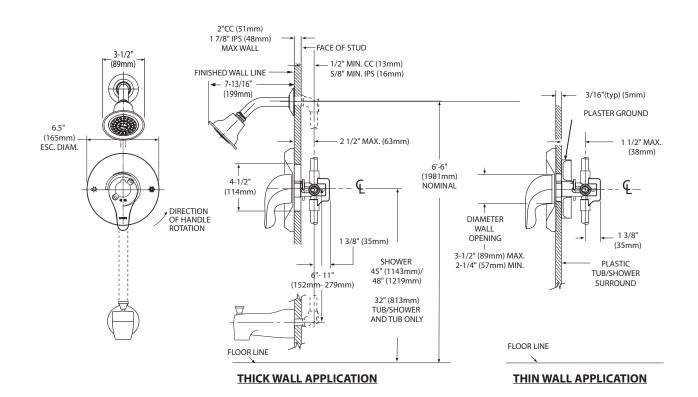

# **CRITICAL DIMENSIONS**

(DO NOT SCALE)

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN www.moen.com



# Specifications





WATER-SAVING CHATEAU® POSI-TEMP® Single-Handle Tub/Shower Trim Kit

Model: TL188 (Bulk Packed 12 per carton)

### DESCRIPTION

- Metal construction with a chrome plated finish.
- Includes shower arm, flange, non-metalic shower head and non-metallic diverter tub spout

## **OPERATION**

- Handle operates counterclockwise through a 270° arc with off at 6 o'clock and maximum hot at the 9 o'clock position. Shut off in clockwise direction
- Adjustable temperature limit stop to control maximum hot water temperature
- Pressure balancing mechanism maintains selected discharge temperature to ± 3°

### **FLOW**

Showerhead is limited to 1.75 gpm at 80 psi

## **CARTRIDGE**


- 1222 cartridge design
- Accommodates back to back installations
- Nonmetallic/nonferrous and stainless steel material

## **STANDARDS**

- Third party certified to meet CSA B125.1, ASSE 1016, ASME A112.18.1, ANSI A117.1 and all applicable requirements referenced therein
- ADA ( for lever handle

## WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

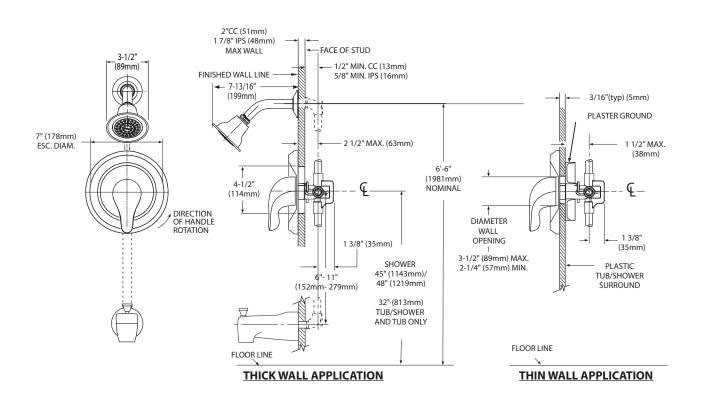

# **CRITICAL DIMENSIONS**

(DO NOT SCALE)

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN www.moen.com