MOEN[®]

SPECIFICATIONS

DESCRIPTION

- Metal construction with chrome plated finish
- Includes showerhead, arm and flange
- Supplied with adjustable temperature limit stop

OPERATION

- Lever style handle
- Temperature operates through an 180° arc of handle travel (full cold to full hot)

FLOW

- Showerhead is limited to 2.5 gpm (9.5 L/min) Max
- EP Suffix models are limited to 1.75 gpm (6.6 L/min.) at 80 psi

CARTRIDGE

- 1225 cartridge design
- Nonmetallic/nonferrous and stainless steel materials
- Accommodates back to back installations

STANDARDS

- Third party certified to ASME A112.18.1/CSA B-125-1, and all applicable requirements referenced therein
- ADA 🖒 for lever handle

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations




CHATEAU®

Single-Handle Shower and Tub Shower Trim Kit

Models:

TI5473, TI5473ep - Shower Trim Only TI5471ep - Tub/shower Trim

(Bulk Packed 12 per carton)

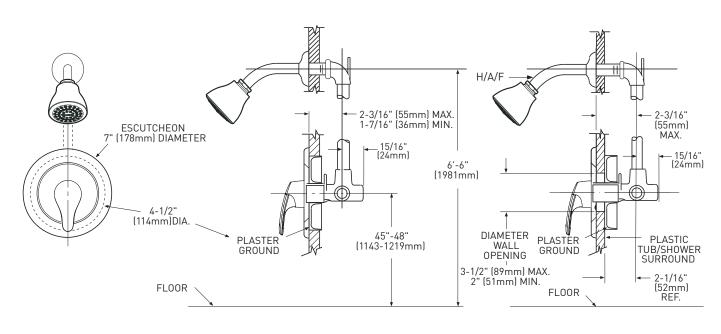

THICK WALL APPLICATION

THIN WALL APPLICATION