

DESCRIPTION

- Metal construction with various finishes identified by suffix

OPERATION

- Temperature operates through an 270° arc of handle travel (full cold to full hot)
- Adjustable temperature limit stop to control maximum hot water temperature
- 90° rotation of transfer valve handle with stops
- Pressure balancing mechanism maintains selected discharge temperature to $\pm 3^\circ$


STANDARDS

- Third party certified to ASME A112.18.1/CSA B-125.1
- **ADA**  for lever handles

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multifamily installation
- 5 year limited warranty when used in a commercial installation

Visit www.moen.com/support for complete details and limitations

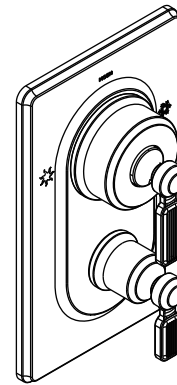

SMYTH™ POSI-TEMP® with Built-In 3 Function Transfer Valve Trim

Models: TS2601 series
Fits Valves: 2521
 2551
 2571
 2581

