

## DESCRIPTION

- ADA compliant operation
- Metal and brass construction with various finishes identified by suffix
- Inlets and outlets on same plane
- Supplied with vandal resistant screws


## OPERATION

- Lever style handle
- Detents at each flow position
- Rotary 180° handle operation
- Valve operates 2 distinct functions

## CARTRIDGE

- Ceramic disk cartridge

## STANDARDS


- Third party certified to meet ASME A112.18/CSA B125.1 and all applicable requirements therein
- **ADA**  for lever handle

## WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multifamily installation
- 5 year limited warranty when used in a commercial installation


Visit [www.moen.com/support](http://www.moen.com/support) for complete details and limitations

**NOTE:** This valve is not intended to be used as a shut-off valve. To prevent the potential of cross flow, check valves must be integral to the supply valve or installed in both hot and cold water supply lines.

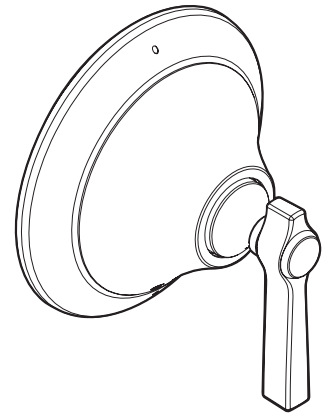

**Flara™**  
**Two/Three Function Transfer**  
**Valve Trim Kit**

**Models:** TS4911 series  
**Valve:** 3372 or 3375

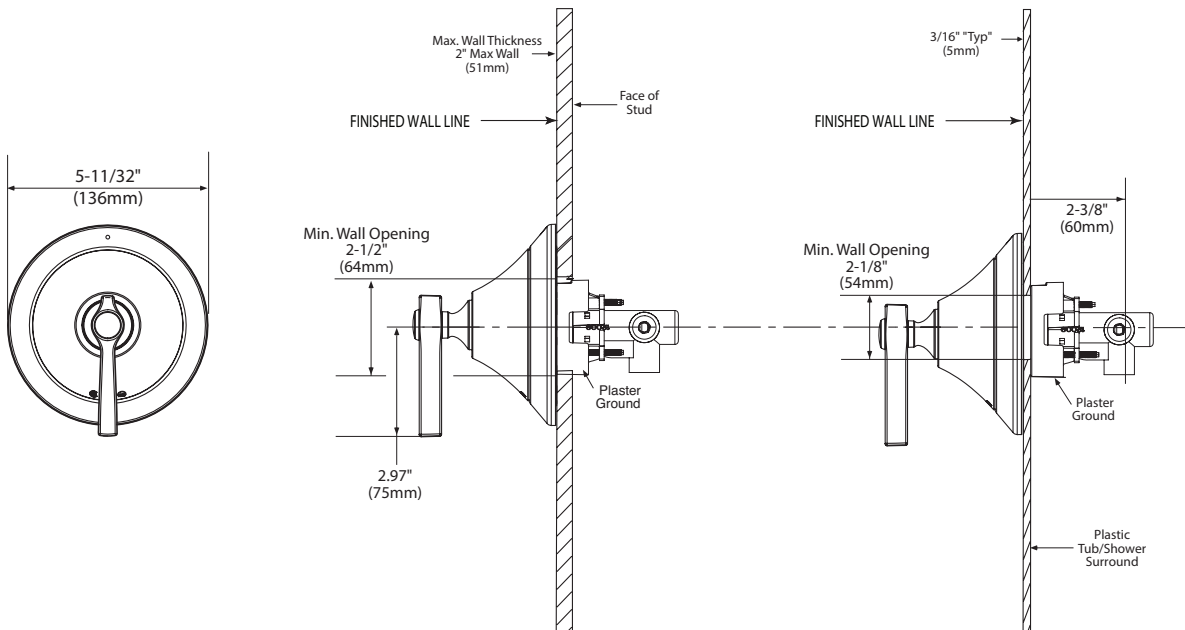

## CRITICAL DIMENSIONS

(DO NOT SCALE)