MOEN[®]

Specifications

FAUCET DESCRIPTION

- · Metal construction with chrome finish
- For use with S3371, 3/4" thermostatic valve (sold separately)
- Pairs with TS9712 volume control valve trim and S3600 volume control valve (sold separately)

OPERATION


- Flow lever operates counterclockwise through a 90° arc with shut off at 6 o'clock and maximum flow at the 3 o'clock position, shut off in clockwise direction
- Temperature lever operates through a 340° arc with maximum cold at full clockwise rotation and maximum hot at full counterclockwise rotation
- Safety stop preset temperature at 105°F (41°C)
- Safety stop override allows maximum temperature at 120°F (49°C)
- Factory established temperature range from 70°F (21°C) to 120°F (49°C)

STANDARDS

- Third party certified to: ASME A112.18./CSA B-125.1, ASSE1016 and all applicable requirements referenced therein
- ADA **b** for lever handle

WARRANTY


- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multifamily installation
- 5 year limited warranty when used in a commercial installation Visit www.moen.com/support for complete details and limitations




VIA[™] 3/4" Thermostatic Shower Trim

Models: TS9711 - Valve Trim only

Valve Models: S3371 (sold separately)



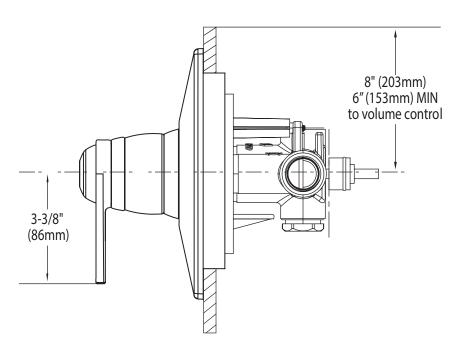

CRITICAL DIMENSIONS

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

8/18