MOEN®
COMMERCIAL



Commercial

Products Catalog 2015



Contents

2 Introducing M•DURA™ Modern Suite *NEW!*

4 M•DURA™ Heavy-Duty Faucets

22 M•PRESS™ Heavy-Duty Metering Faucets

26 M•BITION™ Medium-Duty Faucets

34 M•POWER™ Sensor-Operated Faucets

42 M•POWER™ Sensor-Operated Flush Valves

48 M•DURA™ Heavy-Duty Manual Flush Valves

54 M•DURA™ Heavy-Duty Tub/Shower

72 M•DURA™ Stainless Steel Sinks

77 Accessories

82 Index



Built for the real world.

Moen® Commercial understands the demanding environments of commercial and institutional facilities. Just as importantly, we understand what satisfies demanding professionals like you.

That's why we go beyond manufacturing durable, reliable products that include vandal-resistant and energy-efficient options. Our products offer lower lifetime costs to help you meet financial goals too. Plus, we stand behind everything with a best-in-class warranty and outstanding customer service so you can have confidence in your decision to choose Moen Commercial. Real-world performance. Real-world reliability.

Moen 5-Year Limited Warranty



We're so confident in the performance of our products that we back them with a 5-Year Limited Warranty. If they should ever drip, leak or prove to have a finish defect, we'll send you the replacement parts, free of charge. Just call 1-800-BUY-MOEN or see your Moen dealer for complete details.



Water-saving feature when compared to industry standards



Americans with Disabilities Act (ADA) compliant



Meets the current requirements of the Buy American Act (BAA)



Indicates Moen Commercial products that are certified to meet WaterSense® labeling criteria and contribute toward maximizing LEED® points

Moen products comply with the Safe Drinking Water Act's stringent lead safety standards.

Each product in this catalog has been identified by:

- ▲ NSF 61/9 and 372 compliant
- ● NSF 372 compliant
- ■ Non-drinking water faucet

Available Spring 2015

The **M•DURA**™ Modern Suite

Designed to impress, built to last

New from Moen® Commercial, the M•DURA™ Modern Suite is the answer to your need for elegant residential-influenced styling with essential built-in durability for high-use commercial environments.

The Commercial Modern Suite offers two M•DURA heavy-duty lavatory faucets featuring cast-brass construction, durable ceramic cartridges and vandal-resistant aerators and handle assemblies.

Also available in multiple tub and showering configurations, the Modern Suite is built with vandal-resistant and ADA compliant features, including a three-function discrete transfer and handshower with non-positive pause in designated offerings.

With the new Modern Suite, facilities can achieve the best of both worlds — sleek, modern styling and commercial-grade quality.

The M•DURA Modern Suite. Timeless Design. Built to Last.



M•DURA™
LAVATORY



9419
One-Handle, Heavy-Duty, Single-Mount with metal drain
See page 5.



9223F15
Two-Handle, Heavy-Duty, Widespread with metal drain
See page 6.

M•DURA™
SHOWERING



T9360
Three-Function Transfer Valve Trim
See page 66.







T9389
Posi-Temp® Tub/Shower Trim
See page 60.



9263
Heavy-Duty Showerhead
See page 65.



9349
Heavy-Duty Handshower
See page 64.




T9343
Posi-Temp® Tub/Shower with Three-Function Transfer Trim, handshower and slide bar
See page 55.



T9343GBM25
Posi-Temp® Tub/Shower with Three-Function Transfer Trim, handshower and slide bar/grab bar
See page 56.

See pages 77–78 for Modern Suite parts and accessories.

M•DURA™ Heavy-Duty Faucets

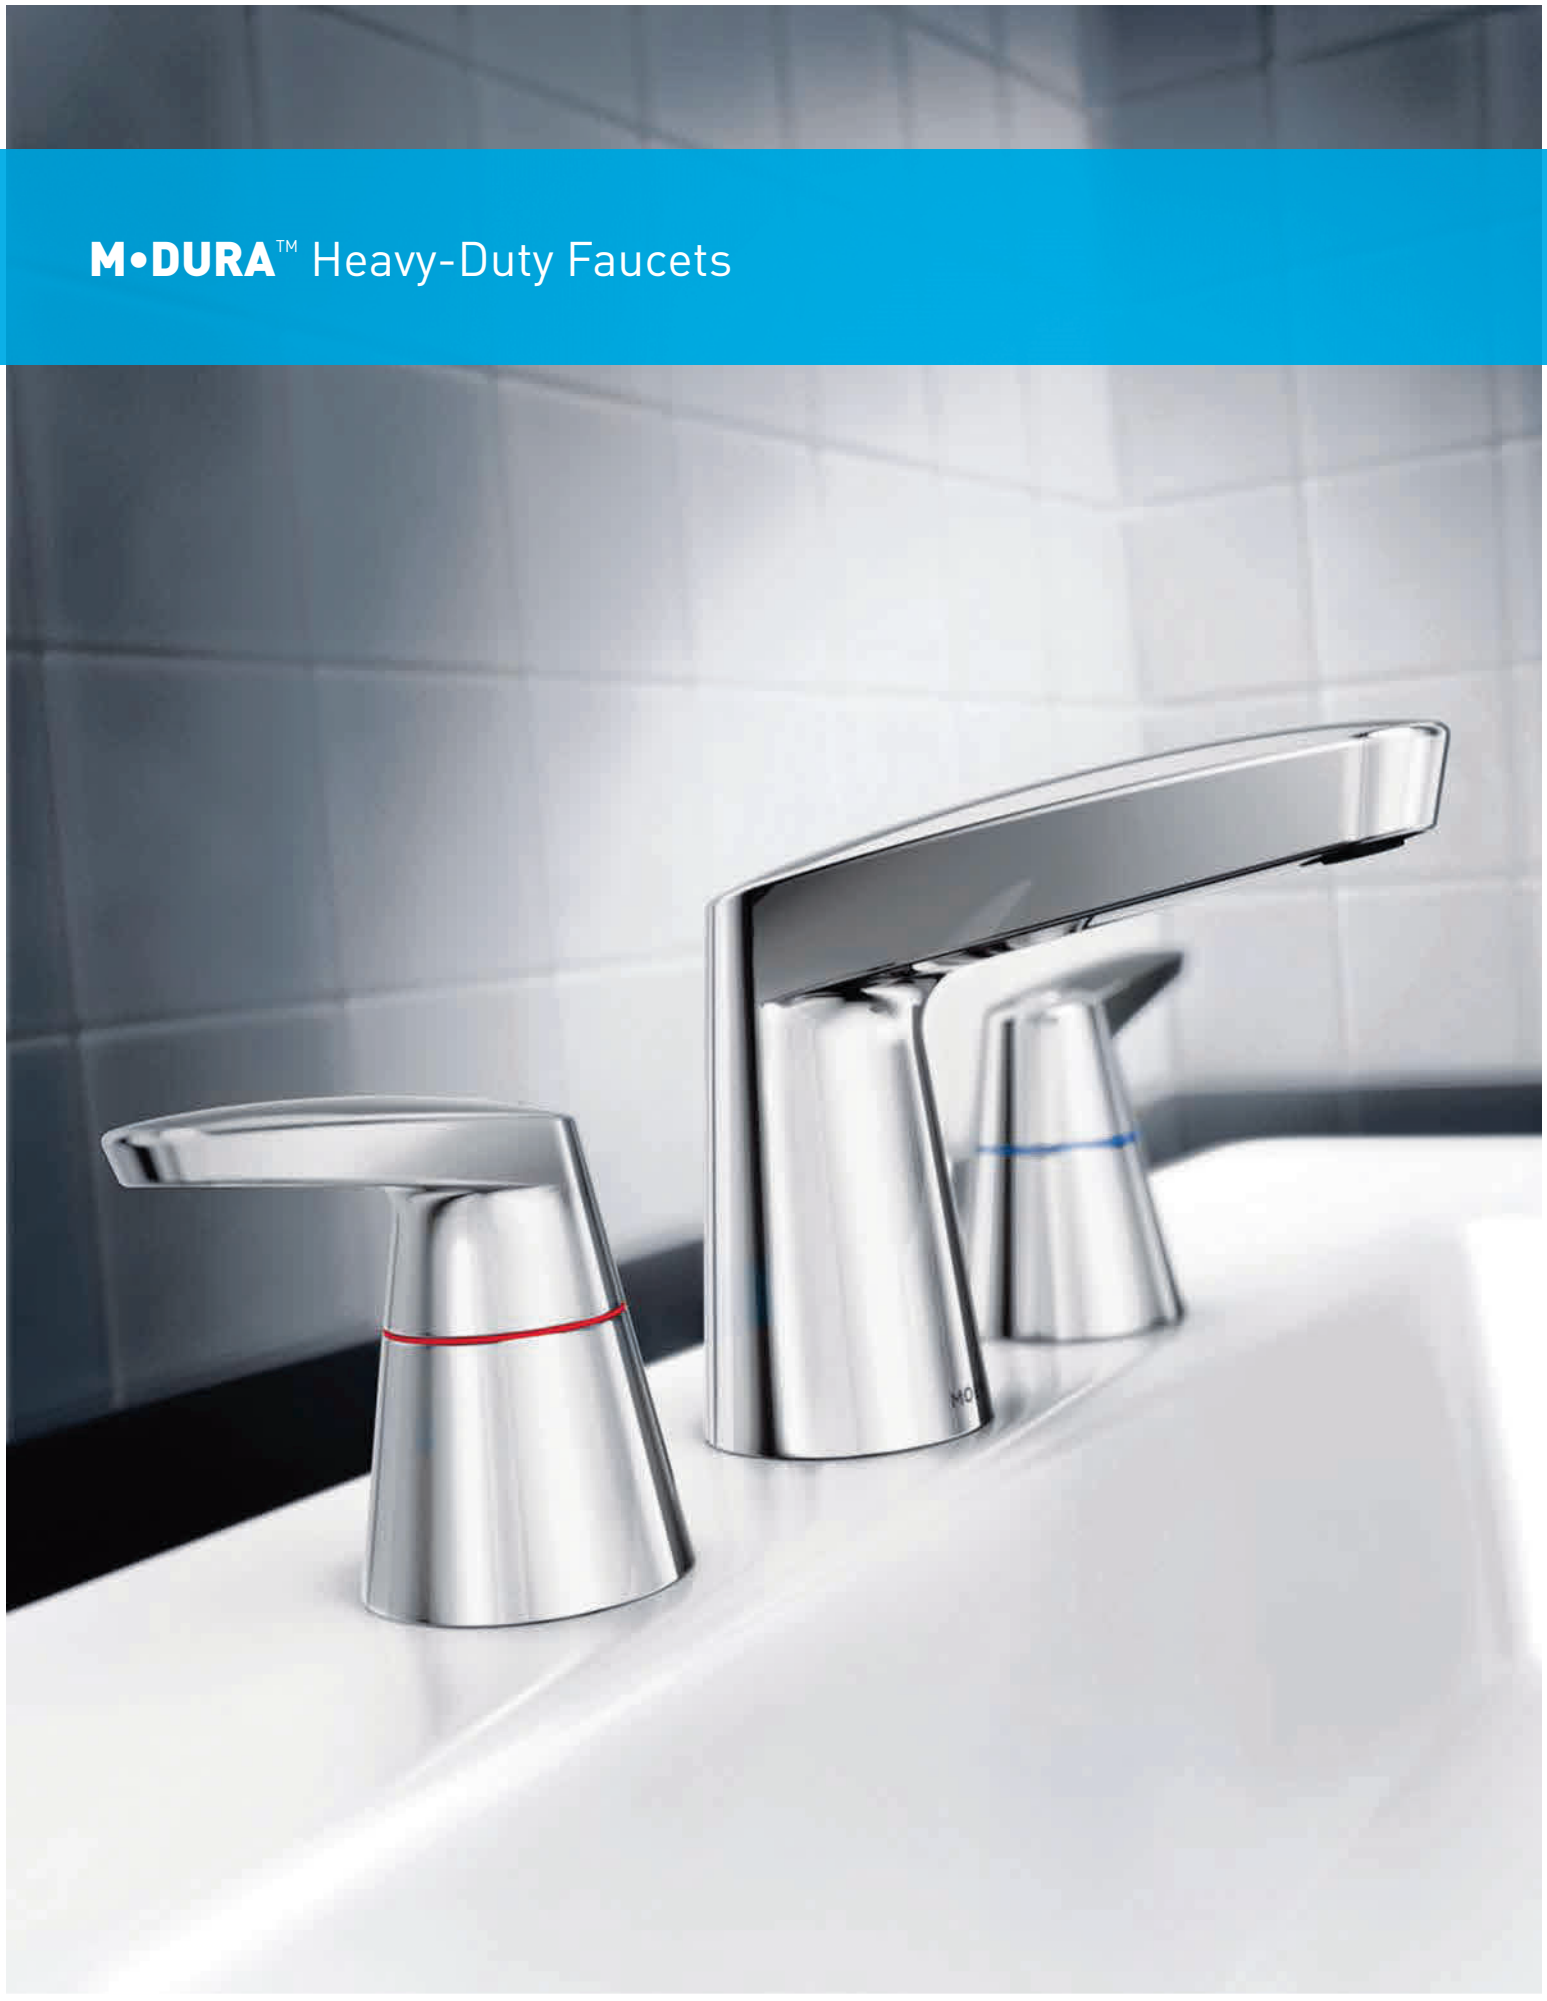



Real-World Reliability: Heavy-Duty Construction
Solid cast-brass body is made heavy to last long, with added protection from a wear-resistant chrome finish.

Tested Durability: Ceramic Disc Cartridge
Protected by a free-spinning hub and tamperproof screws, the heavy-duty cartridge features internal stops that prevent misalignment and ensure complete shutoff.

Vandal-Resistant Operation: Recessed Aerator
Unique design can only be removed by authorized personnel.

Updated Appearance: Easy-to-Clean Styling
Softened angles and lack of recesses resist dirt buildup.

Worry-Free Quality: Best-in-Class Five-Year Limited Warranty

NEW! MODERN SINGLE-MOUNT LAVATORY FAUCET†

	Model No.		Description	Wt. Ea. Lbs.	Case Qty.	List Price
	9417F15	▲	Single-mount Cast brass 3½" lever handle 1.5 gpm (5.7 lpm) max. vandal-resistant aerator ⅜" compression connections 22" supply line No lift rod hole **Brass adjustable temperature limit stop**	4.2	3	252.00
	9417F05	▲	0.5 gpm (1.9 lpm) max. vandal-resistant aerator	4.2	3	252.00
	9419	▲	1.5 gpm (5.7 lpm) max. vandal-resistant aerator With metal drain	5.4	3	280.00
	9419F05	▲	0.5 gpm (1.91 lpm) max vandal-resistant aerator With metal drain	5.4	3	280.00
	99559		4" optional deckplate	0.5	20	31.05

Parts and accessories for M•DURA Modern products can be found on pages 77–78.
† 1225® Duralast® Cartridge
▲ NSF 61/9 and 372 compliant
ADA compliant BAA compliant WaterSense® Water-saving

NEW! MODERN WIDESPREAD LAVATORY FAUCET*



Model No.	Description	Wt. Ea. Lbs.	Case Qty.	List Price
9220F15	8" widespread Cast brass 3" lever handles 1.5 gpm (5.7 lpm) max. vandal-resistant aerator ½" IPS connections Without drain No lift rod hole	7.5	3	310.65
9220F05	0.5 gpm (1.9 lpm) max. vandal-resistant aerator Without drain	7.5	3	310.65
9223F15	1.5 gpm (5.7 lpm) max. vandal-resistant aerator With metal drain	8.6	3	345.15
9223F05	0.5 gpm (1.9 lpm) max. vandal-resistant aerator With metal drain	8.6	3	345.15

CENTERSET LAVATORY FAUCET*



Model No.	Description	Wt. Ea. Lbs.	Case Qty.	List Price
8210	4" centerset Cast brass 2½" lever handles 2.2 gpm (8.3 lpm) max. vandal-resistant aerator ½" IPS connections Without drain No lift rod hole	5.2	6	187.70
8210F15	1.5 gpm (5.7 lpm) max. vandal-resistant aerator	5.2	6	187.70
8210F05	0.5 gpm (1.9 lpm) max. vandal-resistant aerator	5.2	6	187.70
8210F03	0.35 gpm (1.3 lpm) max. vandal-resistant aerator	5.2	6	187.70
8216	2.2 gpm (8.3 lpm) max. vandal-resistant aerator With metal drain	6.4	6	212.00
8218	2.2 gpm (8.3 lpm) max. vandal-resistant aerator With metal grid strainer	5.9	6	205.90

CENTERSET LAVATORY FAUCET*



Model No.				Description	Wt. Ea. Lbs.	Case Qty.	List Price
8215	▲			4" centerset Cast brass 4" wrist blade handles 2.2 gpm (8.3 lpm) max. vandal-resistant aerator ½" IPS connections Without drain No lift rod hole	5.8	6	208.15
8215F15	▲			1.5 gpm (5.7 lpm) max. vandal-resistant aerator	5.8	6	208.15
8215F05	▲			0.5 gpm (1.9 lpm) max. vandal-resistant aerator	5.8	6	208.15
8215F03	▲			0.35 gpm (1.3 lpm) max. vandal-resistant aerator	5.8	6	208.15
8219	▲			2.2 gpm (8.3 lpm) max. vandal-resistant aerator With metal drain	6.7	6	231.30

WIDESPREAD LAVATORY FAUCET*



Model No.				Description	Wt. Ea. Lbs.	Case Qty.	List Price
8220	▲			8" widespread Cast brass 2½" lever handles 2.2 gpm (8.3 lpm) max. vandal-resistant aerator ½" IPS connections Without drain No lift rod hole	7.2	3	294.05
8220F05	▲			0.5 gpm (1.9 lpm) max. vandal-resistant aerator Without drain	7.2	3	294.05
8223	▲			2.2 gpm (8.3 lpm) max. vandal-resistant aerator With metal drain	8.5	3	326.30
8224	▲			2.2 gpm (8.3 lpm) max. vandal-resistant aerator With metal grid strainer	7.8	3	320.05

*Ceramic Disc Cartridges (52000 Hot; 52001 Cold)
▲ NSF 61/9 and 372 compliant
ADA compliant BAA compliant WaterSense® Water-saving

WIDESPREAD LAVATORY FAUCET*



Model No.	Description	Wt. Ea. Lbs.	Case Qty.	List Price
8228	8" widespread Cast brass 4" wrist blade handles 2.2 gpm (8.3 lpm) max. vandal-resistant aerator ½" IPS connections Without drain No lift rod hole	7.8	3	312.60
8228F15	1.5 gpm (5.7 lpm) max. vandal-resistant aerator	5.2	3	312.60
8228F05	0.5 gpm (1.9 lpm) max. vandal-resistant aerator	5.2	3	312.60
8228F03	0.35 gpm (1.3 lpm) max. vandal-resistant aerator	5.2	3	312.60
8239	2.2 gpm (8.3 lpm) max. vandal-resistant aerator With metal drain	9.5	3	344.85

MANUAL-TO-METERING CONVERSION KIT



Model No.	Description	Wt. Ea. Lbs.	Case Qty.	List Price
52120	Manual-to-metering conversion kit. Convert any M•DURA™ 8200 series faucet† to an M•PRESS™ metering faucet with a simple cartridge and handle change. Includes hot/cold color indicator rings	1.4	12	146.95

† Excludes 8242, 8244, 8281, 8286 and new Modern Lavs

CENTERSET LAVATORY FAUCET**



Chrome Brushed Nickel

Model No.	Description	Wt. Ea. Lbs.	Case Qty.	List Price
8413	4" centerset Cast brass 2½" lever handle 2.2 gpm (8.3 lpm) max. aerator ½" IPS connections Without drain No lift rod hole **Adjustable temperature limit stop**	6.1	3	160.70
8413F15	1.5 gpm (5.7 lpm) max. aerator	6.1	3	160.70
8413F05	0.5 gpm (1.9 lpm) max. aerator	6.1	3	160.70
8413F03	0.35 gpm (1.3 lpm) max. aerator	6.1	3	160.70
8414	2.2 gpm (8.3 lpm) max. aerator With metal drain	7.2	3	191.80
8414BN	With metal drain Brushed Nickel	7.2	3	248.15

CENTERSET LAVATORY FAUCET**



Model No.			Description	Wt. Ea. Lbs.	Case Qty.	List Price
8416	▲		4" centerset Cast brass 6" lever handle 2.2 gpm (8.3 lpm) max. aerator ½" IPS connections Without drain No lift rod hole **Adjustable temperature limit stop**	6.5	3	172.65
8416F05	▲		0.5 gpm (1.9 lpm) max. aerator	6.5	3	172.65

SINGLE-MOUNT LAVATORY FAUCET**



Model No.			Description	Wt. Ea. Lbs.	Case Qty.	List Price
8417	▲		Single-mount Cast brass 2½" lever handle 2.2 gpm (8.3 lpm) max. aerator ⅜" compression connections 22" supply line Without drain No lift rod hole **Adjustable temperature limit stop**	4.4	6	222.05
8417F15	▲		1.5 gpm (5.7 lpm) max. aerator	4.4	6	230.95
8417F05	▲		0.5 gpm (1.9 lpm) max. aerator	4.4	6	222.05
8417F03	▲		0.35 gpm (1.3 lpm) max. aerator	4.4	6	222.05
8419	▲		1.5 gpm (5.7 lpm) max. aerator With metal drain **Adjustable temperature limit stop**	5.6	6	252.20
8419F05	▲		0.5 gpm (1.91 lpm) max. aerator	5.6	6	252.20

SINGLE-MOUNT LAVATORY FAUCET**



Model No.		Description	Wt. Ea. Lbs.	Case Qty.	List Price
8418	▲	Single-mount Cast brass 6" lever handle 2.2 gpm (8.3 lpm) max. aerator ⅜" compression connections 22" supply line Without drain No lift rod hole **Adjustable temperature limit stop**	4.6	6	233.40

*Ceramic Disc Cartridges (52000 Hot; 52001 Cold) **Ceramic Disc Cartridge (121549)
▲ NSF 61/9 and 372 compliant
ADA compliant BAA compliant WaterSense® Water-saving

ONE-HANDLE ECO-PERFORMANCE SINGLE SUPPLY LAVATORY FAUCET**

	Model No.		Description	Wt. Ea. Lbs.	Case Qty.	List Price
	8161	▲	Single-mount Cast brass 2½" lever handle 0.5 gpm (1.9 lpm) max. vandal-resistant aerator Anti-rotational mounting system Cold water tap only ½" IPS connections Without drain	2.5	6	138.70
	99550		4" optional deckplate Anti-rotation (for use with 8161 or 8884 only)	0.6	12	28.40

WIDESPREAD KITCHEN FAUCET*

	Model No.		Description	Wt. Ea. Lbs.	Case Qty.	List Price
	8225	▲	8" widespread Solid brass construction 4" wrist blade handles 2.2 gpm (8.3 lpm) max. aerator 8" spout reach ½" IPS connections Without drain Includes optional 2.0 gpm (7.6 lpm) max. laminar flow spout base conversion kit	7.7	6	305.25
	8229	▲	Without spout See page 21 for spout options	6.0	6	254.50

WIDESPREAD KITCHEN FAUCET*

	Model No.		Description	Wt. Ea. Lbs.	Case Qty.	List Price
	8227	▲	8" widespread Solid brass construction 2½" lever handles 2.2 gpm (8.3 lpm) max. aerator 8" spout reach ½" IPS connections Without drain	7.3	6	286.70
	8226	▲	Without spout See page 21 for spout options	6.2	6	235.90

WIDESPREAD KITCHEN FAUCET*

	Model No.		Description	Wt. Ea. Lbs.	Case Qty.	List Price
	8241	▲	8" widespread Solid brass construction 2½" lever handles 2.2 gpm (8.3 lpm) max. aerator 9½" spout reach ½" IPS connections Without drain	7.4	6	280.45

WIDESPREAD KITCHEN FAUCET*

	Model No.		Description	Wt. Ea. Lbs.	Case Qty.	List Price
	8242	▲	8" widespread Solid brass construction 2½" lever handles 2.2 gpm (8.3 lpm) max. aerator 8" spout reach Chrome side spray ½" IPS connections	8.2	6	328.85

WIDESPREAD KITCHEN FAUCET*

	Model No.		Description	Wt. Ea. Lbs.	Case Qty.	List Price
	8244	▲	8" widespread Solid brass construction 4" wrist blade handles 2.2 gpm (8.3 lpm) max. aerator 8" spout reach Chrome side spray ½" IPS connections	8.5	6	347.40

Optional spouts available on page 21. Additional aerators available on page 76.

*Ceramic Disc Cartridges (52000 Hot; 52001 Cold) **Ceramic Disc Cartridge (52001 Cold)
▲ NSF 61/9 and 372 compliant
ADA compliant BAA compliant Water-saving

WIDESPREAD KITCHEN FAUCET*

	Model No.		Description	Wt. Ea. Lbs.	Case Qty.	List Price
	8248	▲	8" widespread Solid brass construction 4" wrist blade handles 2.2 gpm (8.3 lpm) max. aerator 5¼" spout reach ½" IPS connections Without drain Includes optional 2.0 gpm (7.6 lpm) max. laminar flow spout base conversion kit	7.5	6	299.00

KITCHEN FAUCET*

	Model No.		Description	Wt. Ea. Lbs.	Case Qty.	List Price
	8282	▲	8" deckmount Solid brass construction 4" wrist blade handles 2.2 gpm (8.3 lpm) max. aerator 9½" spout reach ½" IPS connections	6.6	6	296.60

KITCHEN FAUCET*

	Model No.		Description	Wt. Ea. Lbs.	Case Qty.	List Price
	8283	▲	8" deckmount Solid brass construction 2½" lever handles 2.2 gpm (8.3 lpm) max. aerator 9½" spout reach ½" IPS connections	6.2	6	278.05

KITCHEN FAUCET*

	Model No.		Description	Wt. Ea. Lbs.	Case Qty.	List Price
	8287	▲	8" deckmount Solid brass construction 2½" lever handles 2.2 gpm (8.3 lpm) max. aerator 8" spout reach ½" IPS connections	6.1	6	281.80
	8280	▲	Without spout See page 21 for spout options	4.9	6	226.10

KITCHEN FAUCET*



Model No.		Description	Wt. Ea. Lbs.	Case Qty.	List Price
8289	▲	8" deckmount Solid brass construction 4" wrist blade handles 2.2 gpm (8.3 lpm) max. aerator 8" spout reach ½" IPS connections Includes optional 2.0 gpm (7.6 lpm) max. laminar flow spout base conversion kit	7.2	6	300.30
8285	▲	Without spout See page 21 for spout options	5.4	6	244.65

SINGLE-HANDLE KITCHEN FAUCET**



Model No.			Description	Wt. Ea. Lbs.	Case Qty.	List Price
8701	▲		Single-mount/deckmount Solid brass construction 4" lever handle 1.5 gpm (5.7 lpm) max. aerator 9" spout reach 22" supply line Flexible supplies with ⅜" compression connection **Brass adjustable temperature limit stop** Includes optional 8" deckplate	3.7	6	138.75
8711	▲		12" spout reach	5.1	6	207.40

SINGLE-HANDLE KITCHEN FAUCET**



Model No.			Description	Wt. Ea. Lbs.	Case Qty.	List Price
8707	▲		Single-mount/deckmount with chrome side spray Solid brass construction 4" lever handle 1.5 gpm (5.7 lpm) max. aerator 9" spout reach 22" supply line Flexible supplies with ⅜" compression connection **Brass adjustable temperature limit stop** Includes optional 8" deckplate	3.7	6	165.35
8717	▲		12" spout reach	5.1	6	245.10

SINGLE-HANDLE WALLMOUNT KITCHEN FAUCET**



Model No.			Description	Wt. Ea. Lbs.	Case Qty.	List Price
8713	▲		7½"–8½" application Solid brass construction 4" lever handle 1.5 gpm (5.7 lpm) max. aerator 9" spout reach ½" eccentric connections **Brass adjustable temperature limit stop**	4.0	6	416.55
8714	▲		12" spout reach	4.8	6	429.40

Optional spouts available on page 21. Additional aerators available on page 76.

*Ceramic Disc Cartridges (52000 Hot; 52001 Cold) **1255® Duralast® Cartridge
▲ NSF 61/9 and 372 compliant
ADA compliant BAA compliant Water-saving

BAR/PANTRY FAUCET*



Model No.		Description	Wt. Ea. Lbs.	Case Qty.	List Price
8270	▲	4" centerset Cast brass 2½" lever handles 2.2 gpm (8.3 lpm) max. vandal-resistant laminar flow 3⅝" spout reach ½" IPS connections Without drain	4.7	6	223.25
8272	▲	5¼" spout reach	4.9	6	234.10

BAR/PANTRY FAUCET*





Model No.		Description	Wt. Ea. Lbs.	Case Qty.	List Price
8273	▲	4" centerset Cast brass 2½" lever handles 2.2 gpm (8.3 lpm) max. aerator 6" spout reach ½" IPS connections Without drain	5.5	6	191.95
8274	▲	Without spout See page 21 for spout options	3.8	6	180.00

BAR/PANTRY FAUCET*



Model No.		Description	Wt. Ea. Lbs.	Case Qty.	List Price
8278	▲	4" centerset Cast brass 4" wrist blade handles 2.2 gpm (8.3 lpm) max. vandal-resistant laminar flow 3⅝" spout reach ½" IPS connections Without drain	5.3	6	235.25
8279	▲	5¼" spout reach Includes optional 2.0 gpm (7.6 lpm) max. laminar flow spout base conversion kit	5.7	6	254.55
8276	▲	Without spout See page 21 for spout options	3.5	6	200.45

WALLMOUNT MULTIPURPOSE FAUCET*

	Model No.		Description	Wt. Ea. Lbs.	Case Qty.	List Price
	8281	▲	4" centers Cast brass 2½" lever handles 2.2 gpm (8.3 lpm) max. aerator 5¼" spout reach ½" connections ½" x ⅜" male compression angle adapters	5.0	6	295.30
	8286	▲	Without spout See page 21 for spout options	4.4	6	247.60

SINGLE-HANDLE MULTIPURPOSE FAUCET**

	Model No.		Description	Wt. Ea. Lbs.	Case Qty.	List Price
	8138	▲	4"–8" application 4" lever handle 2.2 gpm (8.3 lpm) max. aerator Solid brass construction 5¼" spout reach Chrome side spray 22" supply line Flexible supplies with ⅜" compression connection **Brass adjustable temperature limit stops**	5.9	6	273.15
	8137	▲	Without side spray	5.6	6	229.50
	8125	▲	Without spout See page 21 for spout options	4.8	6	174.95

Optional spouts available on page 21. Additional aerators available on page 76.

*Ceramic Disc Cartridges (52000 Hot; 52001 Cold) **1255® Duralast® Cartridge
▲ NSF 61/9 and 372 compliant
ADA compliant BAA compliant

UTILITY FAUCET*

Model No.		Description	Wt. Ea. Lbs.	Case Qty.	List Price
					
8277	■	4" centerset Cast brass 2½" lever handles 6½" spout reach ¾" garden hose threaded spout Unrestricted flow ½" IPS connections Without drain	5.7	6	203.10

WALLMOUNT UTILITY FAUCET*

Model No.		Description	Wt. Ea. Lbs.	Case Qty.	List Price
					
8119	▲	7½"–8½" application Cast brass 2½" lever handles 2.2 gpm (8.3 lpm) max. aerator 12" spout reach ½" IPS eccentric connections	6.7	6	284.20
8121	▲	Without spout 4" wrist blade handles See page 21 for spout options	6.0	6	230.55

WALLMOUNT UTILITY FAUCET*

Model No.		Description	Wt. Ea. Lbs.	Case Qty.	List Price
					
8126	▲	7½"–8½" application Cast brass 4" wrist blade handles 2.2 gpm (8.3 lpm) max. aerator 8" spout reach ½" IPS eccentric connections	7.2	6	284.95

SERVICE SINK FAUCET*

	Model No.		Description	Wt. Ea. Lbs.	Case Qty.	List Price
	8230	■	7½"–8½" application Cast brass 2½" lever handles 9⅜" spout reach Unrestricted flow ¾" garden hose thread Vacuum breaker Service stops Wallmounting bracket Pail hook ½" IPS eccentric connections **Rough Chrome finish**	6.5	3	195.35

SERVICE SINK FAUCET*

	Model No.		Description	Wt. Ea. Lbs.	Case Qty.	List Price
	8124	■	7½"–8½" application Cast brass 2½" lever handles 10¼" spout reach Unrestricted flow ¾" garden hose thread Vacuum breaker Service stops **Internal check stops prevent crossflow** Wallmounting bracket Integral check stops Pail hook ½" IPS eccentric connections **Polished Chrome finish**	7.4	6	240.85
	8232	■	4" wrist blade handles	7.6	6	282.70

MOP HANGER

	Model No.		Description	Wt. Ea. Lbs.	Case Qty.	List Price
	8198		Stainless steel Holds 3 handles Mounting hardware included	2.5	10	63.45

HOSE BRACKET

	Model No.		Description	Wt. Ea. Lbs.	Case Qty.	List Price
	8199		Stainless steel 30" heavy-duty rubber hose Mounting hardware included	1.4	10	46.15

Optional spouts available on page 21. Additional aerators available on page 76.

*Ceramic Disc Cartridges (52000 Hot; 52001 Cold)
▲ NSF 61/9 and 372 compliant ■ Non-drinking water faucet
ADA compliant BAA compliant

LABORATORY FAUCET*



Model No.		Description	Wt. Ea. Lbs.	Case Qty.	List Price
8103	■	Single-mount Cast brass 2½" lever handle 2.2 gpm (8.3 lpm) max. aerator 5¼" spout reach 22" supply line ⅜" compression connections	4.0	6	163.65
8100	■	Without spout See page 21 for spout options	2.9	6	106.45

LABORATORY FAUCET*



Model No.		Description	Wt. Ea. Lbs.	Case Qty.	List Price
8106	■	Single-mount Cast brass 2½" lever handle Unrestricted flow 6" vacuum-breaker spout with hose nozzle 22" supply line ⅜" compression connections	4.7	6	220.85

LABORATORY FAUCET*



Model No.		Description	Wt. Ea. Lbs.	Case Qty.	List Price
8113	■	Single-mount Cast brass 2½" lever handles 2.2 gpm (8.3 lpm) max. aerator 5¼" spout reach 22" supply line ⅜" compression connections	5.1	6	242.40
8110	■	Without spout See page 21 for spout options	3.9	6	185.25

LABORATORY FAUCET*



Model No.		Description	Wt. Ea. Lbs.	Case Qty.	List Price
8116	■	Single-mount Cast brass 2½" lever handles Unrestricted flow 6" vacuum-breaker spout with hose nozzle 22" supply line ⅜" compression connections	6.1	6	299.65

SPECIALTY FAUCET FOR HEALTHCARE APPLICATIONS*



Model No.	Description	Wt. Ea. Lbs.	Case Qty.	List Price
8248SM ▲	8" widespread Solid brass construction **4" smooth wrist blade handles** 2.2 gpm (8.3 lpm) max. aerator 5¼" spout reach ½" IPS connections Without drain Includes optional 2.0 gpm (7.6 lpm) max. laminar flow spout base conversion kit	7.5	3	299.00
8248SMF15 ▲	1.5 gpm (5.7 lpm) max. aerator Includes optional 1.5 gpm (5.7 lpm) max. laminar flow spout base conversion kit	7.5	3	299.00

SPECIALTY FAUCET FOR HEALTHCARE APPLICATIONS*



Model No.	Description	Wt. Ea. Lbs.	Case Qty.	List Price
8225SM ▲	8" widespread Solid brass construction **4" smooth wrist blade handles** 2.2 gpm (8.3 lpm) max. aerator 8" spout reach ½" IPS connections Without drain Includes optional 2.0 gpm (7.6 lpm) max. laminar flow spout base conversion kit	7.7	3	305.25
8225SMF15 ▲	1.5 gpm (5.7 lpm) max. aerator Includes optional 1.5 gpm (5.7 lpm) max. laminar flow spout base conversion kit	7.7	3	305.25

SPECIALTY FAUCET FOR HEALTHCARE APPLICATIONS*



Model No.	Description	Wt. Ea. Lbs.	Case Qty.	List Price
8278SM ▲	4" centerset Cast brass **4" smooth wrist blade handles** 2.2 gpm (8.3 lpm) max. vandal-resistant laminar flow 3⅝" spout reach ½" IPS connections Without drain	5.3	6	235.25
8278SMF15 ▲	1.5 gpm (5.7 lpm) max. vandal-resistant laminar flow	5.3	6	235.25

Optional spouts available on page 21. Additional aerators available on page 76.

*Ceramic Disc Cartridges (52000 Hot; 52001 Cold)
■ Non-drinking water faucet ▲ NSF 61/9 and 372 compliant
ADA compliant BAA compliant Water-saving

SPECIALTY FAUCET FOR HEALTHCARE APPLICATIONS*



Model No.	Description	Wt. Ea. Lbs.	Case Qty.	List Price
8279SM ▲	4" centerset Cast brass **4" smooth wrist blade handles** 2.2 gpm (8.3 lpm) max. vandal-resistant laminar flow 5¼" spout reach ½" IPS connections Without drain Includes optional 2.0 gpm (7.6 lpm) max. laminar flow spout base conversion kit	5.7	6	250.30
8279SMF15 ▲	1.5 gpm (5.7 lpm) max. vandal-resistant laminar flow Includes optional 1.5 gpm (5.7 lpm) max. laminar flow spout base conversion kit	5.7	6	250.30

SPECIALTY FAUCET FOR HEALTHCARE APPLICATIONS*



Model No.	Description	Wt. Ea. Lbs.	Case Qty.	List Price
8210SM ▲	4" centerset Cast brass **2½" smooth lever handles** 2.2 gpm (8.3 lpm) max. vandal-resistant aerator ½" IPS connections Without drain No lift rod hole	5.2	6	187.70
8210SMF15 ▲	1.5 gpm (5.7 lpm) max. vandal-resistant aerator	5.2	6	187.70

SPECIALTY FAUCET FOR HEALTHCARE APPLICATIONS*



Model No.	Description	Wt. Ea. Lbs.	Case Qty.	List Price
8215SM ▲	4" centerset Cast brass **4" smooth wrist blade handles** 2.2 gpm (8.3 lpm) max. vandal-resistant aerator ½" IPS connections Without drain No lift rod hole	5.8	6	208.15
8215SMF15 ▲	1.5 gpm (5.7 lpm) max. vandal-resistant aerator	5.8	6	208.15

DOUBLE-BEND SPOUTS



Model No.	Reach	Base to Aerator**	Overall Height	Wt. Ea. Lbs.	Case Qty.	List Price
S0000	6.00"	▲ 2.00"	4.325"	0.89	12	46.30
S0001	6.00"	▲ 3.75"	7.375"	1.20	12	55.70
S0002	6.00"	▲ 5.00"	9.125"	1.64	12	56.90
S0003	6.00"	▲ 5.75"	9.75"	1.60	12	55.70
S0004	6.00"	▲ 8.50"	12.75"	1.71	12	66.90
S0006	8.00"	▲ 0.75"	3.50"	1.20	12	42.40
S0007	8.00"	▲ 6.00"	9.75"	1.90	12	56.90
S0009	10.00"	▲ 5.75"	9.75"	2.20	12	61.35
S0010	12.00"	▲ 0.50"	3.125"	1.40	12	66.90
S0011	12.00"	▲ 6.00"	9.75"	1.64	12	55.70

MULTI-BEND SPOUTS



Model No.	Reach	Base to Aerator**	Overall Height	Wt. Ea. Lbs.	Case Qty.	List Price
S0012	18.00"	▲ 3.75"	7.75"	2.40	12	121.60

GOOSENECK SPOUTS



Model No.	Reach	Base to Aerator**	Overall Height	Wt. Ea. Lbs.	Case Qty.	List Price
S0020	3.625"	▲ 6.25"	8.75"	1.47	12	56.90
S0030	5.25"	▲ 5.50"	10.00"	1.55	12	62.45
S0050	8.00"	▲ 6.125"	11.375"	1.65	12	69.15
S0060	8.00"	▲ 10.00"	12.00"	1.10	12	85.90
S0070	9.50"	▲ 6.50"	9.175"	1.80	12	74.75

RESTRICTED SWINGS SPOUT KITS†



Model No.	Reach	Base to Aerator**	Overall Height	Wt. Ea. Lbs.	Case Qty.	List Price
S00R30	5.25"	▲ 7.375"	11.25"	2.15	12	97.05
S00R50	8.00"	▲ 7.875"	12.75"	2.27	12	104.80

† 140° restricted swing with 100° adapter

VACUUM-BREAKER SPOUTS





Model No.	Reach	Base to Aerator**	Overall Height	Wt. Ea. Lbs.	Case Qty.	List Price
SV003	6.00"	■ 5.75"	10.50"	2.15	12	114.85
SV006	8.00"	■ 0.50"	4.00"	1.40	12	107.05
SV010	12.00"	■ 0.50"	4.00"	1.70	12	112.65

All spouts include 2.2 gpm (8.3 lpm) max. aerators. Spouts are designed for use only with the 8100 and 8200 series. All spouts come with a friction washer for rigid spout mounting.

*Ceramic Disc Cartridges (52000 Hot; 52001 Cold) **Height from spout nut base plane to aerator
▲ NSF 61/9 and 372 compliant ■ Non-drinking water faucet
ADA compliant BAA compliant WaterSense® Water-saving

M•PRESS™ Heavy-Duty Metering Faucets

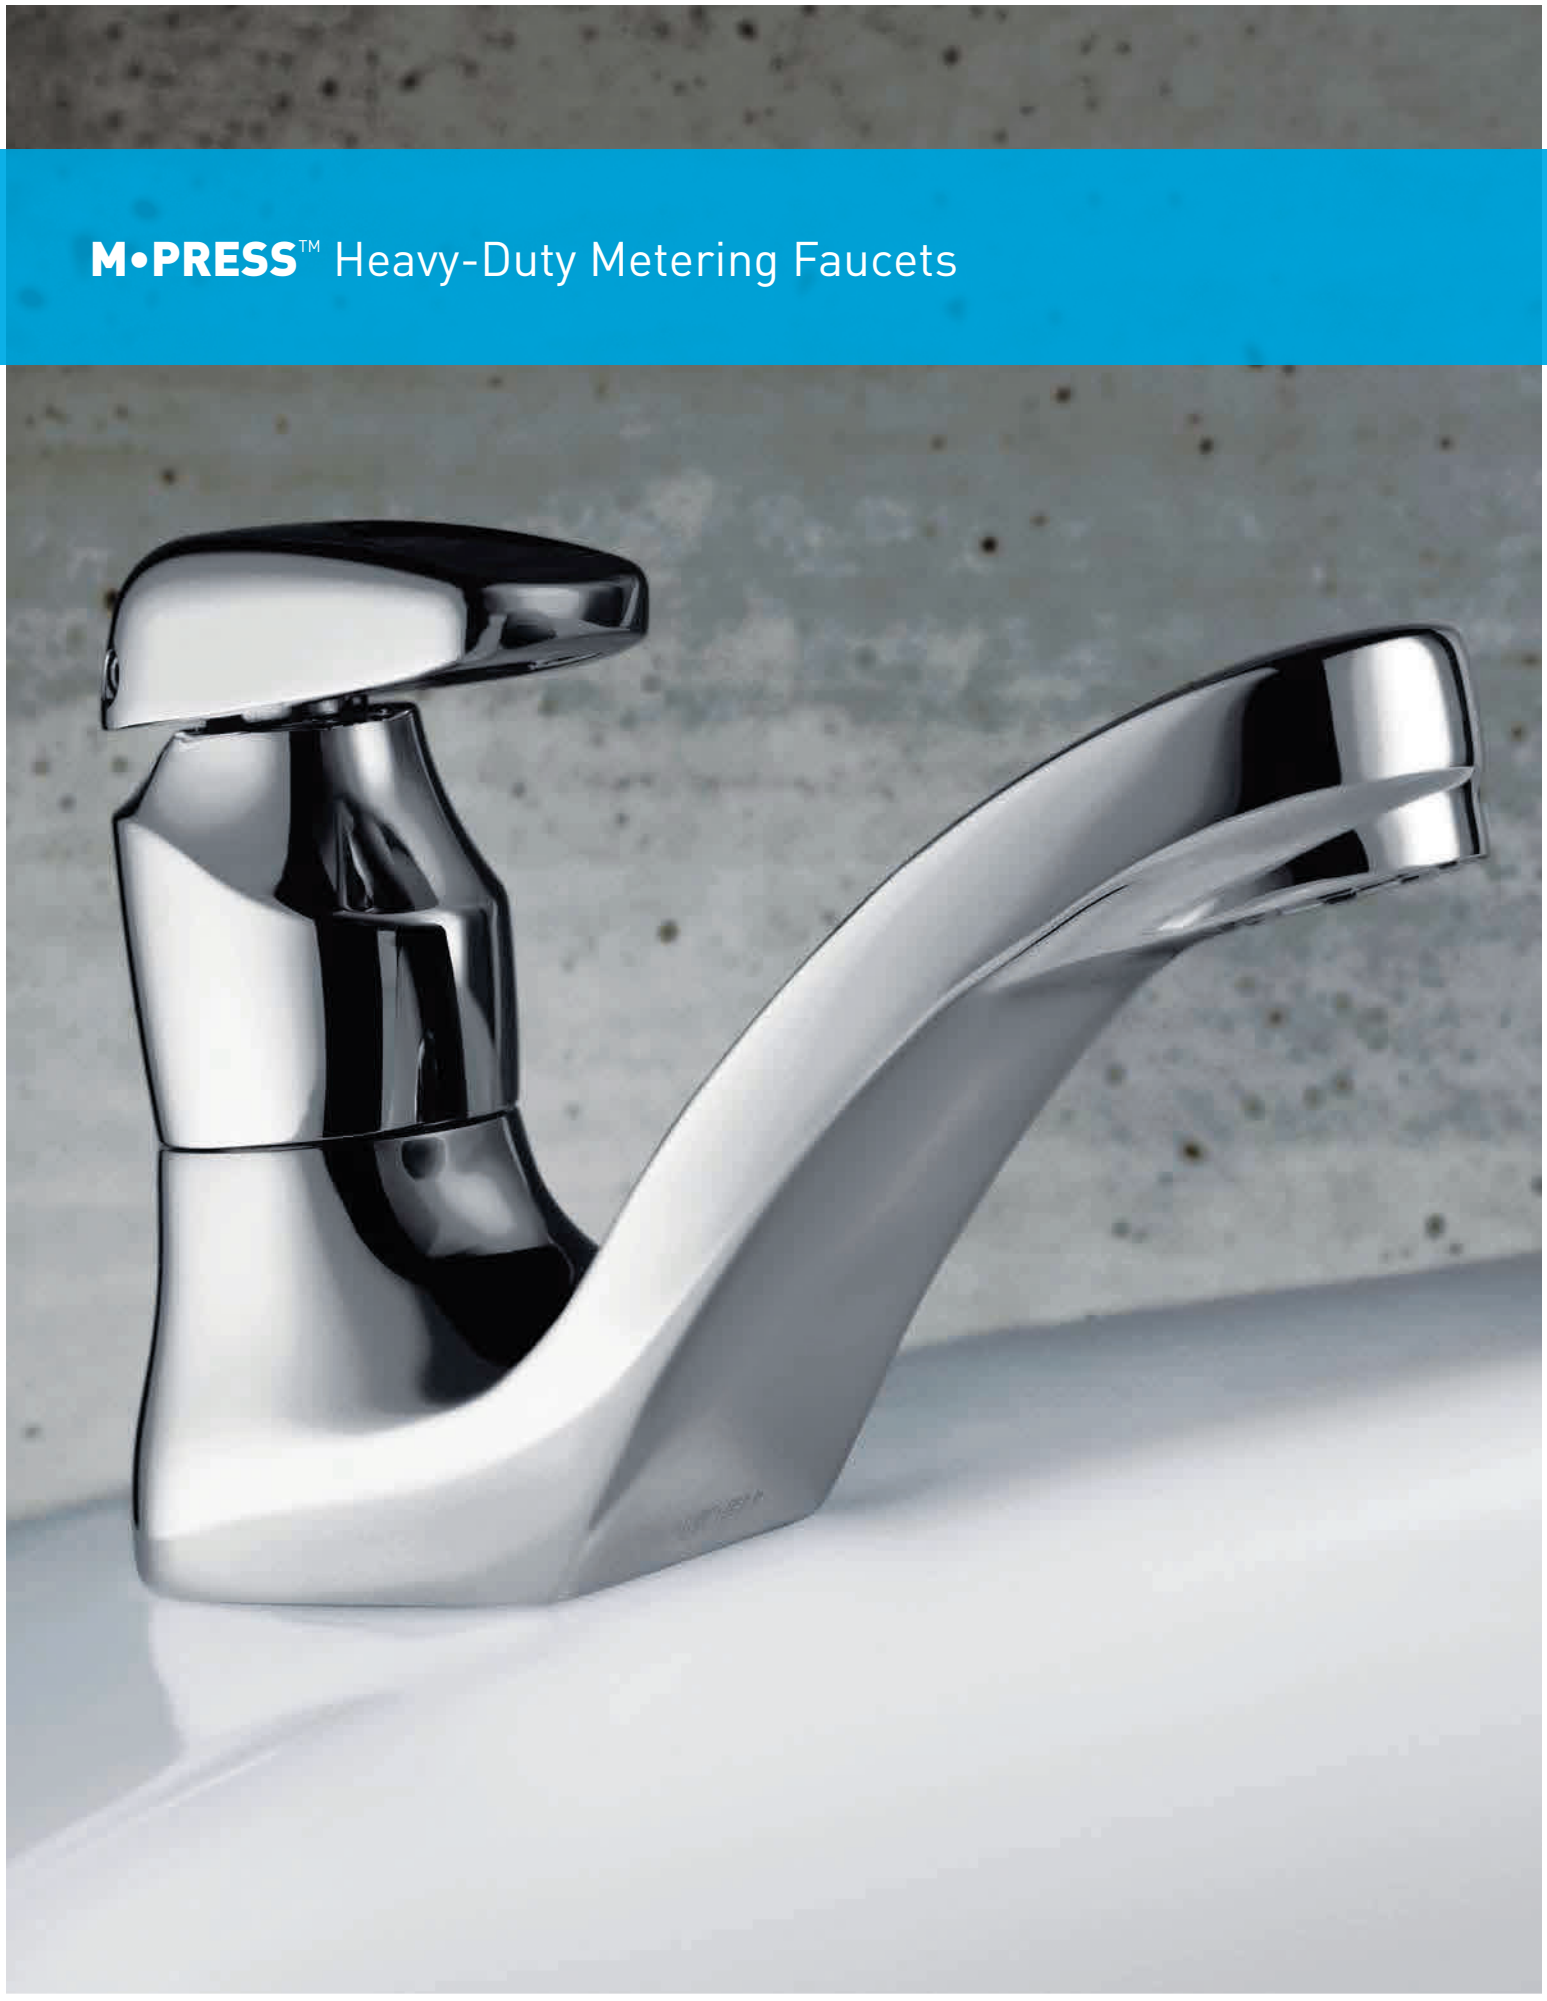

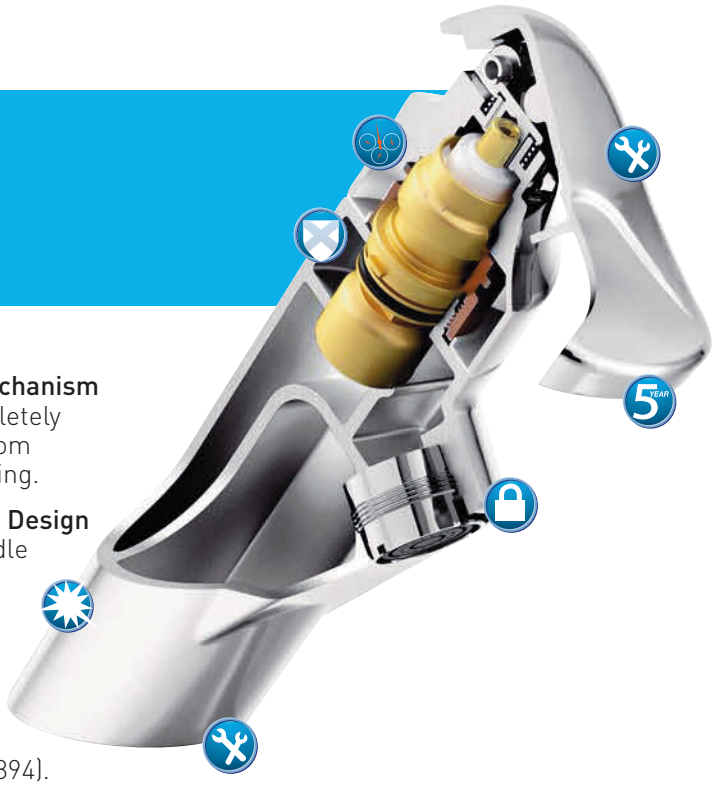

Consistent Timing: **Sealed Silicone Timing Mechanism**
The sealed silicone timing mechanism is completely separated from the water source—protected from impurities and clogs—to ensure consistent timing.

Reliable Performance: **Pressure-Independent Design**
Even if pressure varies, you get consistent handle feel, reliable timing and proper shutoff with every use.

Secure Installation:
Anti-Rotation Handle and Deckplate
Interlocking design ensures the handle will never rotate. Optional anti-rotation deckplates are available for single-mount models (8884, 8894).

Vandal-Resistant Operation: **Recessed Aerator**
Unique, recessed design protects aerator from tampering and damage.

Superior Durability: **Heavy-Duty Construction**
Solid cast brass body and a finish that resists harsh chemical cleaners.

Worry-Free Quality:
Best-in-Class Five-Year Limited Warranty

Versatile Interchangeability:
Manual-to-Metering Conversion Kit
Convert any M•DURA™ 8200 series* faucet to an M•PRESS™ metering faucet with a simple cartridge and handle conversion kit.
*Excludes 8242, 8244, 8281, 8286 and new Modern Lavs

ECO-PERFORMANCE SINGLE-MOUNT METERING FAUCET*

	Model No.			Description	Wt. Ea. Lbs.	Case Qty.	List Price
	8884	●		Single-mount Cast brass Timing preset to 10 seconds Adjustable timing cycle 0.5 gpm (1.9 lpm) max. vandal-resistant multi-stream laminar flow Max. 0.25 gpc (.95 lpc) @ 30 seconds ½" IPS connections Without drain	2.6	6	169.10
	99550			4" optional anti-rotation deckplate (for use with 8884 model)	0.6	12	28.40

*Durameter™ Cartridge
● NSF 372 compliant
ADA compliant Water-saving

ECO-PERFORMANCE CENTERSET METERING FAUCET*

Model No.	Description	Wt. Ea. Lbs.	Case Qty.	List Price
 8886	4" centerset Cast brass Timing preset to 10 seconds Adjustable timing cycle 0.5 gpm (1.9 lpm) max. vandal-resistant multi-stream laminar flow Max. 0.25 gpc (.95 lpc) @ 30 seconds ½" IPS connections Without drain	5.8	6	311.65

ECO-PERFORMANCE WIDESPREAD METERING FAUCET*

Model No.	Description	Wt. Ea. Lbs.	Case Qty.	List Price
 8889	8" widespread Cast brass Timing preset to 10 seconds Adjustable timing cycle 0.5 gpm (1.9 lpm) max. vandal-resistant multi-stream laminar flow Max. 0.25 gpc (.95 lpc) @ 30 seconds ½" IPS connections Without drain	6.0	6	398.90

ECO-PERFORMANCE SINGLE-MOUNT METERING FAUCET*

Model No.	Description	Wt. Ea. Lbs.	Case Qty.	List Price
 8894	Single-mount Cast brass Extended reach Timing preset to 10 seconds Adjustable timing cycle 0.5 gpm (1.9 lpm) max. vandal-resistant multi-stream laminar flow Max. 0.25 gpc (.95 lpc) @ 30 seconds ½" IPS connections Without drain	2.6	6	191.95
 99551	4" optional anti-rotation deckplate (for use with 8894 model)	0.6	12	28.40

DURAMETER™ CARTRIDGE

	Model No.	Description	Wt. Ea. Lbs.	Case Qty.	List Price
	52100	Durameter™ replacement metering cartridge	0.3	1	79.20


MANUAL-TO-METERING CONVERSION KIT

	Model No.	Description	Wt. Ea. Lbs.	Case Qty.	List Price
	52120	Manual-to-metering conversion kit. Convert any M•DURA™ 8200 series faucet† to an M•PRESS™ metering faucet with a simple cartridge and handle change. Includes hot/cold color indicator rings	1.4	12	146.95

† Excludes 8242, 8244, 8281, 8286 and new Modern Lavs

*Durameter™ Cartridge
● NSF 372 compliant
ADA compliant Water-saving

M•BITION™ Medium-Duty Faucets

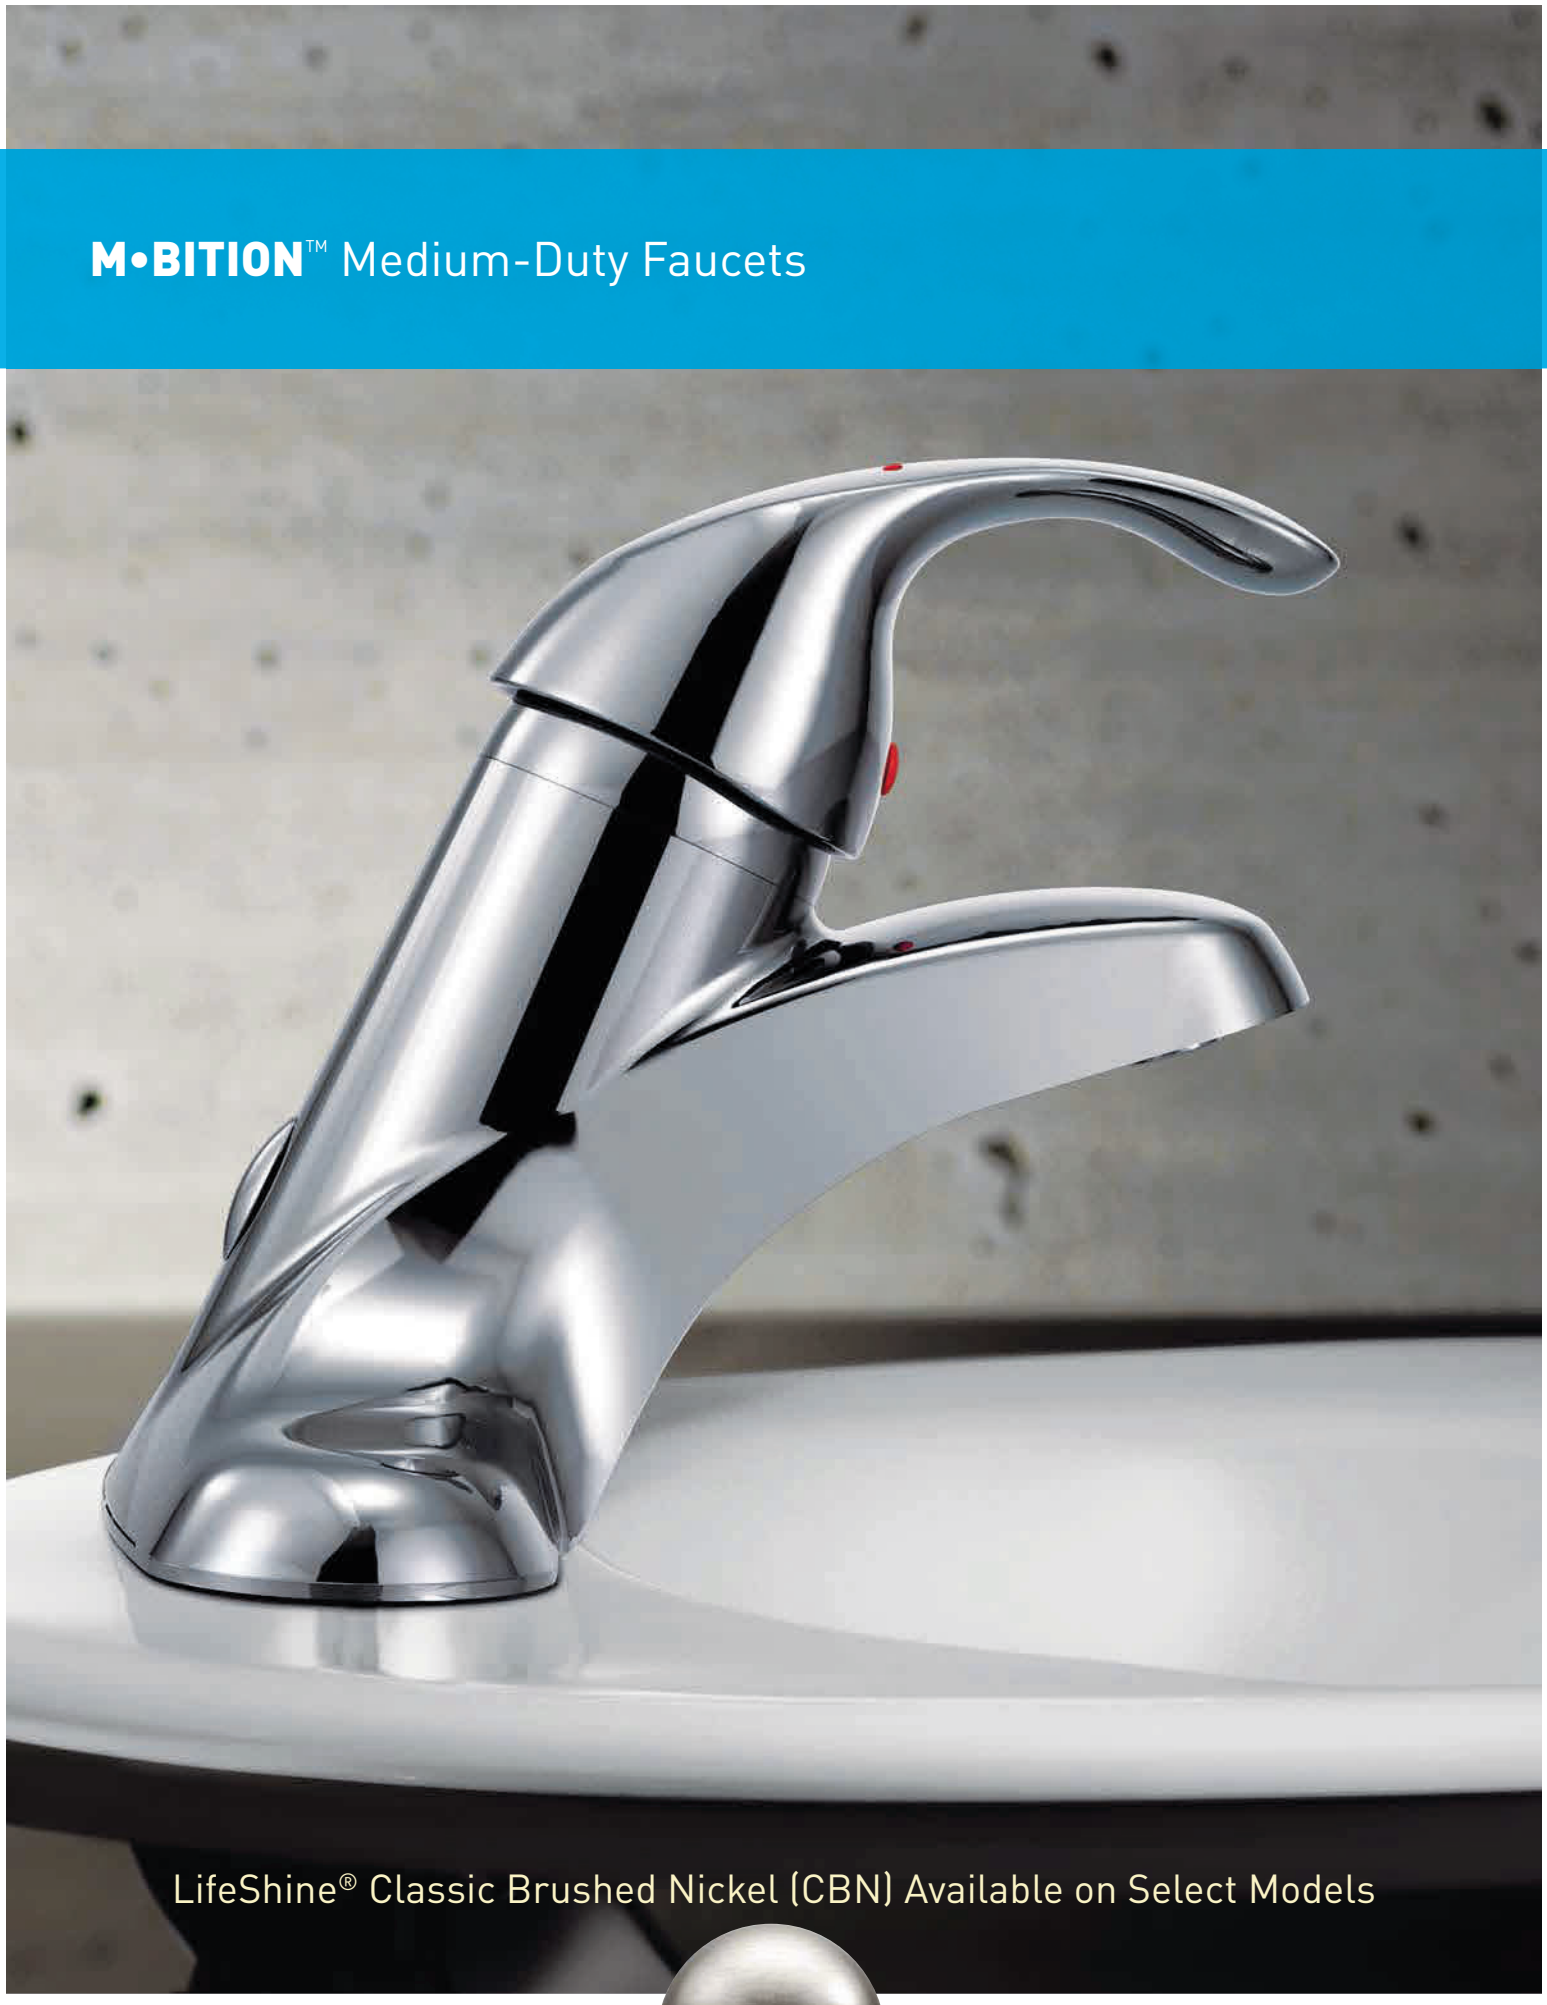

LifeShine® Classic Brushed Nickel (CBN) Available on Select Models



Safe Operation: Temperature Control
Adjustable temperature limit stop with durable brass construction.

Superior Durability: 1255® Duralast® Cartridge
Proprietary ceramic-disc design for smooth feel and reliable operation.

Easy to Install: Supply Line Options
Choose from standard copper or flexible supply lines.

ADA Compliant: Lever Handle
Features embedded hot/cold indicators that won't wear off.

Vandal-Resistant: Recessed Aerator
Unique, recessed design protects aerator from tampering and damage.

Worry-Free Quality: Best-in-Class Five-Year Limited Warranty

SINGLE-HANDLE LAVATORY FAUCET*





Chrome | Classic Brushed Nickel

Model No.		Description	Wt. Ea. Lbs.	Case Qty.	List Price
8400	▲	4" centerset 4" lever handle 1.5 gpm (5.7 lpm) max. vandal-resistant aerator ½" IPS connections Without drain Removable plug button in lift rod hole **Brass adjustable temperature limit stop**	2.9	12	168.30
8420 8420CBN	▲	1.5 gpm (5.7 lpm) max. vandal-resistant aerator With metal drain	4.1 4.1	12 12	195.30 244.15
8425	▲	1.5 gpm (5.7 lpm) max. vandal-resistant aerator With metal grid strainer	3.6	12	190.15
8422 8422CBN	▲	1.5 gpm (5.7 lpm) max. vandal-resistant aerator **Flexible supply lines with ⅜" connections** Without drain	3.6 3.6	12 12	176.60 220.80
8422F05	▲	0.5 gpm (1.9 lpm) max. vandal-resistant aerator **Flexible supply lines with ⅜" connections**	3.6	12	176.60
8422F03	▲	0.35 gpm (1.3 lpm) max. vandal-resistant aerator **Flexible supply lines with ⅜" connections**	3.6	12	176.60

Classic Brushed Nickel available on select models ending in **CBN**.

*1255® Duralast® Cartridge
▲ NSF 61/9 and 372 compliant
ADA compliant | BAA compliant | WaterSense® | Water-saving

SINGLE-HANDLE LAVATORY FAUCET*



Chrome | Classic Brushed Nickel

Model No.	Description	Wt. Ea. Lbs.	Case Qty.	List Price
8430 8430CBN	4" centerset 3" lever handle 1.5 gpm (5.7 lpm) max. vandal-resistant aerator ½" IPS connections Without drain Removable plug button in lift rod hole **Brass adjustable temperature limit stop**	2.8 2.8	12 12	131.60 164.60
8430F05	0.5 gpm (1.9 lpm) max. vandal-resistant aerator	2.7	12	131.60
8430F03	0.35 gpm (1.3 lpm) max. vandal-resistant aerator	2.7	12	131.60
8432	1.5 gpm (5.7 lpm) max. vandal-resistant aerator With metal drain	3.6	12	161.95
8434	1.5 gpm (5.7 lpm) max. vandal-resistant aerator With metal grid strainer	3.4	12	156.10
8439 8439CBN	1.5 gpm (5.7 lpm) max. vandal-resistant aerator **Flexible supply lines with ⅜" connections** Without drain	2.8 2.8	12 12	140.10 175.20
8439F05	0.5 gpm (1.9 lpm) max. vandal-resistant aerator **Flexible supply lines with ⅜" connections**	2.8	12	140.10
8437 8437CBN	1.5 gpm (5.7 lpm) max. vandal-resistant aerator **Flexible supply lines with ⅜" connections** With metal drain	3.6 3.6	12 12	170.40 213.00

CENTERSET LAVATORY FAUCET**



Chrome | Classic Brushed Nickel

Model No.	Description	Wt. Ea. Lbs.	Case Qty.	List Price
8800 8800CBN	4" centerset 4" wrist blade handles 1.5 gpm (5.7 lpm) max. aerator ½" IPS connections Without drain Removable plug button in lift rod hole	2.9 2.9	6 6	156.15 191.50
8800F05	0.5 gpm (1.9 lpm) max. aerator	2.9	6	156.15
8800F03	0.35 gpm (1.3 lpm) max. aerator	2.9	6	156.15
8810	1.5 gpm (5.7 lpm) max. aerator With metal grid strainer	3.8	6	179.10
8820 8820CBN	With metal drain	4.3 4.3	6 6	184.55 226.30

CENTERSET LAVATORY FAUCET**



Chrome | Classic Brushed Nickel

Model No.	Description	Wt. Ea. Lbs.	Case Qty.	List Price
8915 ▲	4" centerset 2½" lever handles 1.5 gpm (5.7 lpm) max. aerator ½" IPS connections Without drain Removable plug button in lift rod hole	2.9	12	114.80
8915CBN ▲		2.9	12	143.50
8917 ▲	With metal drain	4.2	12	135.35
8917CBN ▲		4.2	12	169.25

CENTERSET LAVATORY FAUCET**



Model No.	Description	Wt. Ea. Lbs.	Case Qty.	List Price
8930 ▲	4" centerset Tri-blade handles 1.5 gpm (5.7 lpm) max. aerator ½" IPS connections Without drain Removable plug button in lift rod hole	2.5	12	87.75
8935 ▲	With metal drain	3.5	12	115.65

WIDESPREAD LAVATORY FAUCET**



Chrome | Classic Brushed Nickel

Model No.	Description	Wt. Ea. Lbs.	Case Qty.	List Price
8922 ▲	8"–16" adjustable-width widespread 2½" lever handles 1.5 gpm (5.7 lpm) max. aerator ½" IPS connections With metal drain	6.0	6	242.05
8922CBN ▲		6.0	6	290.50
8924 ▲	With metal grid strainer No lift rod hole	6.7	6	259.00

WIDESPREAD LAVATORY FAUCET**



Model No.	Description	Wt. Ea. Lbs.	Case Qty.	List Price
8966 ▲	8"–16" adjustable-width widespread Tri-blade handles 2.2 gpm (8.3 lpm) max. aerator ½" IPS connections Without drain No lift rod hole	5.0	6	183.45

Classic Brushed Nickel available on select models ending in **CBN**.

*1255® Duralast® Cartridge **Washerless Cartridges (1224)
▲ NSF 61/9 and 372 compliant
ADA compliant BAA compliant WaterSense® Water-saving

KITCHEN FAUCET*

Model No.			Description	Wt. Ea. Lbs.	Case Qty.	List Price
8780	▲		Deckmount 2½" lever handles 1.5 gpm (5.7 lpm) max. aerator 9" spout reach ½" IPS connections	4.5	6	112.45



KITCHEN FAUCET*

Model No.			Description	Wt. Ea. Lbs.	Case Qty.	List Price
8791	▲		Deckmount 2½" lever handles 1.5 gpm (5.7 lpm) max. aerator 9" spout reach ½" IPS connections Chrome side spray	5.3	6	132.50



KITCHEN FAUCET*

Model No.			Description	Wt. Ea. Lbs.	Case Qty.	List Price
8793	▲		Deckmount Tri-blade handles 1.5 gpm (5.7 lpm) max. aerator 9" spout reach ½" IPS connections	3.4	12	102.90



KITCHEN FAUCET*

Model No.			Description	Wt. Ea. Lbs.	Case Qty.	List Price
8798	▲		Deckmount 4" wrist blade handles 1.5 gpm (5.7 lpm) max. aerator 9" spout reach ½" IPS connections	5.0	6	180.25



KITCHEN FAUCET*

	Model No.			Description	Wt. Ea. Lbs.	Case Qty.	List Price
	8792	▲		Deckmount 2½" lever handles 1.5 gpm (5.7 lpm) max. aerator 12⅝" high-arc spout 8½" spout reach ½" IPS connections Chrome side spray	5.2	6	256.65



KITCHEN FAUCET*

	Model No.			Description	Wt. Ea. Lbs.	Case Qty.	List Price
	8799	▲		Deckmount 4" wrist blade handles 1.5 gpm (5.7 lpm) max. aerator 11⅜" high-arc spout 8½" spout reach ½" IPS connections	4.7	6	234.95



*Washerless Cartridges (1224)
▲ NSF 61/9 and 372 compliant
ADA compliant BAA compliant Water-saving

BAR/PANTRY FAUCET*

	Model No.			Description	Wt. Ea. Lbs.	Case Qty.	List Price
	8938	▲		4" centerset 4" wrist blade handles 1.5 gpm (5.7 lpm) max. aerator 4 9/16" spout reach ½" IPS connections	3.9	6	155.75

BAR/PANTRY FAUCET*

	Model No.			Description	Wt. Ea. Lbs.	Case Qty.	List Price
	8939	▲		4" centerset Tri-blade handles 1.5 gpm (5.7 lpm) max. aerator 4 9/16" spout reach ½" IPS connections	2.8	12	118.90

BAR/PANTRY FAUCET*

	Model No.			Description	Wt. Ea. Lbs.	Case Qty.	List Price
	8957	▲		4" centerset 2½" lever handles 1.5 gpm (5.7 lpm) max. aerator 4 9/16" spout reach ½" IPS connections	3.1	12	119.95

BAR/PANTRY FAUCET*


	Model No.			Description	Wt. Ea. Lbs.	Case Qty.	List Price
	8948	▲		4" centerset 4" wrist blade handles 1.5 gpm (5.7 lpm) max. aerator 4¾" spout reach ½" IPS connections	3.8	6	153.65

BAR/PANTRY FAUCET*

	Model No.			Description	Wt. Ea. Lbs.	Case Qty.	List Price
	8940	▲		4" centerset 4" wrist blade handles 1.5 gpm (5.7 lpm) max. aerator 11½" high-arc spout 8½" spout reach ½" IPS connections	4.1	6	222.55

*Washerless Cartridges (1224)
▲ NSF 61/9 and 372 compliant
ADA compliant BAA compliant Water-saving

M•POWER™ Above-Deck Sensor-Operated Faucets

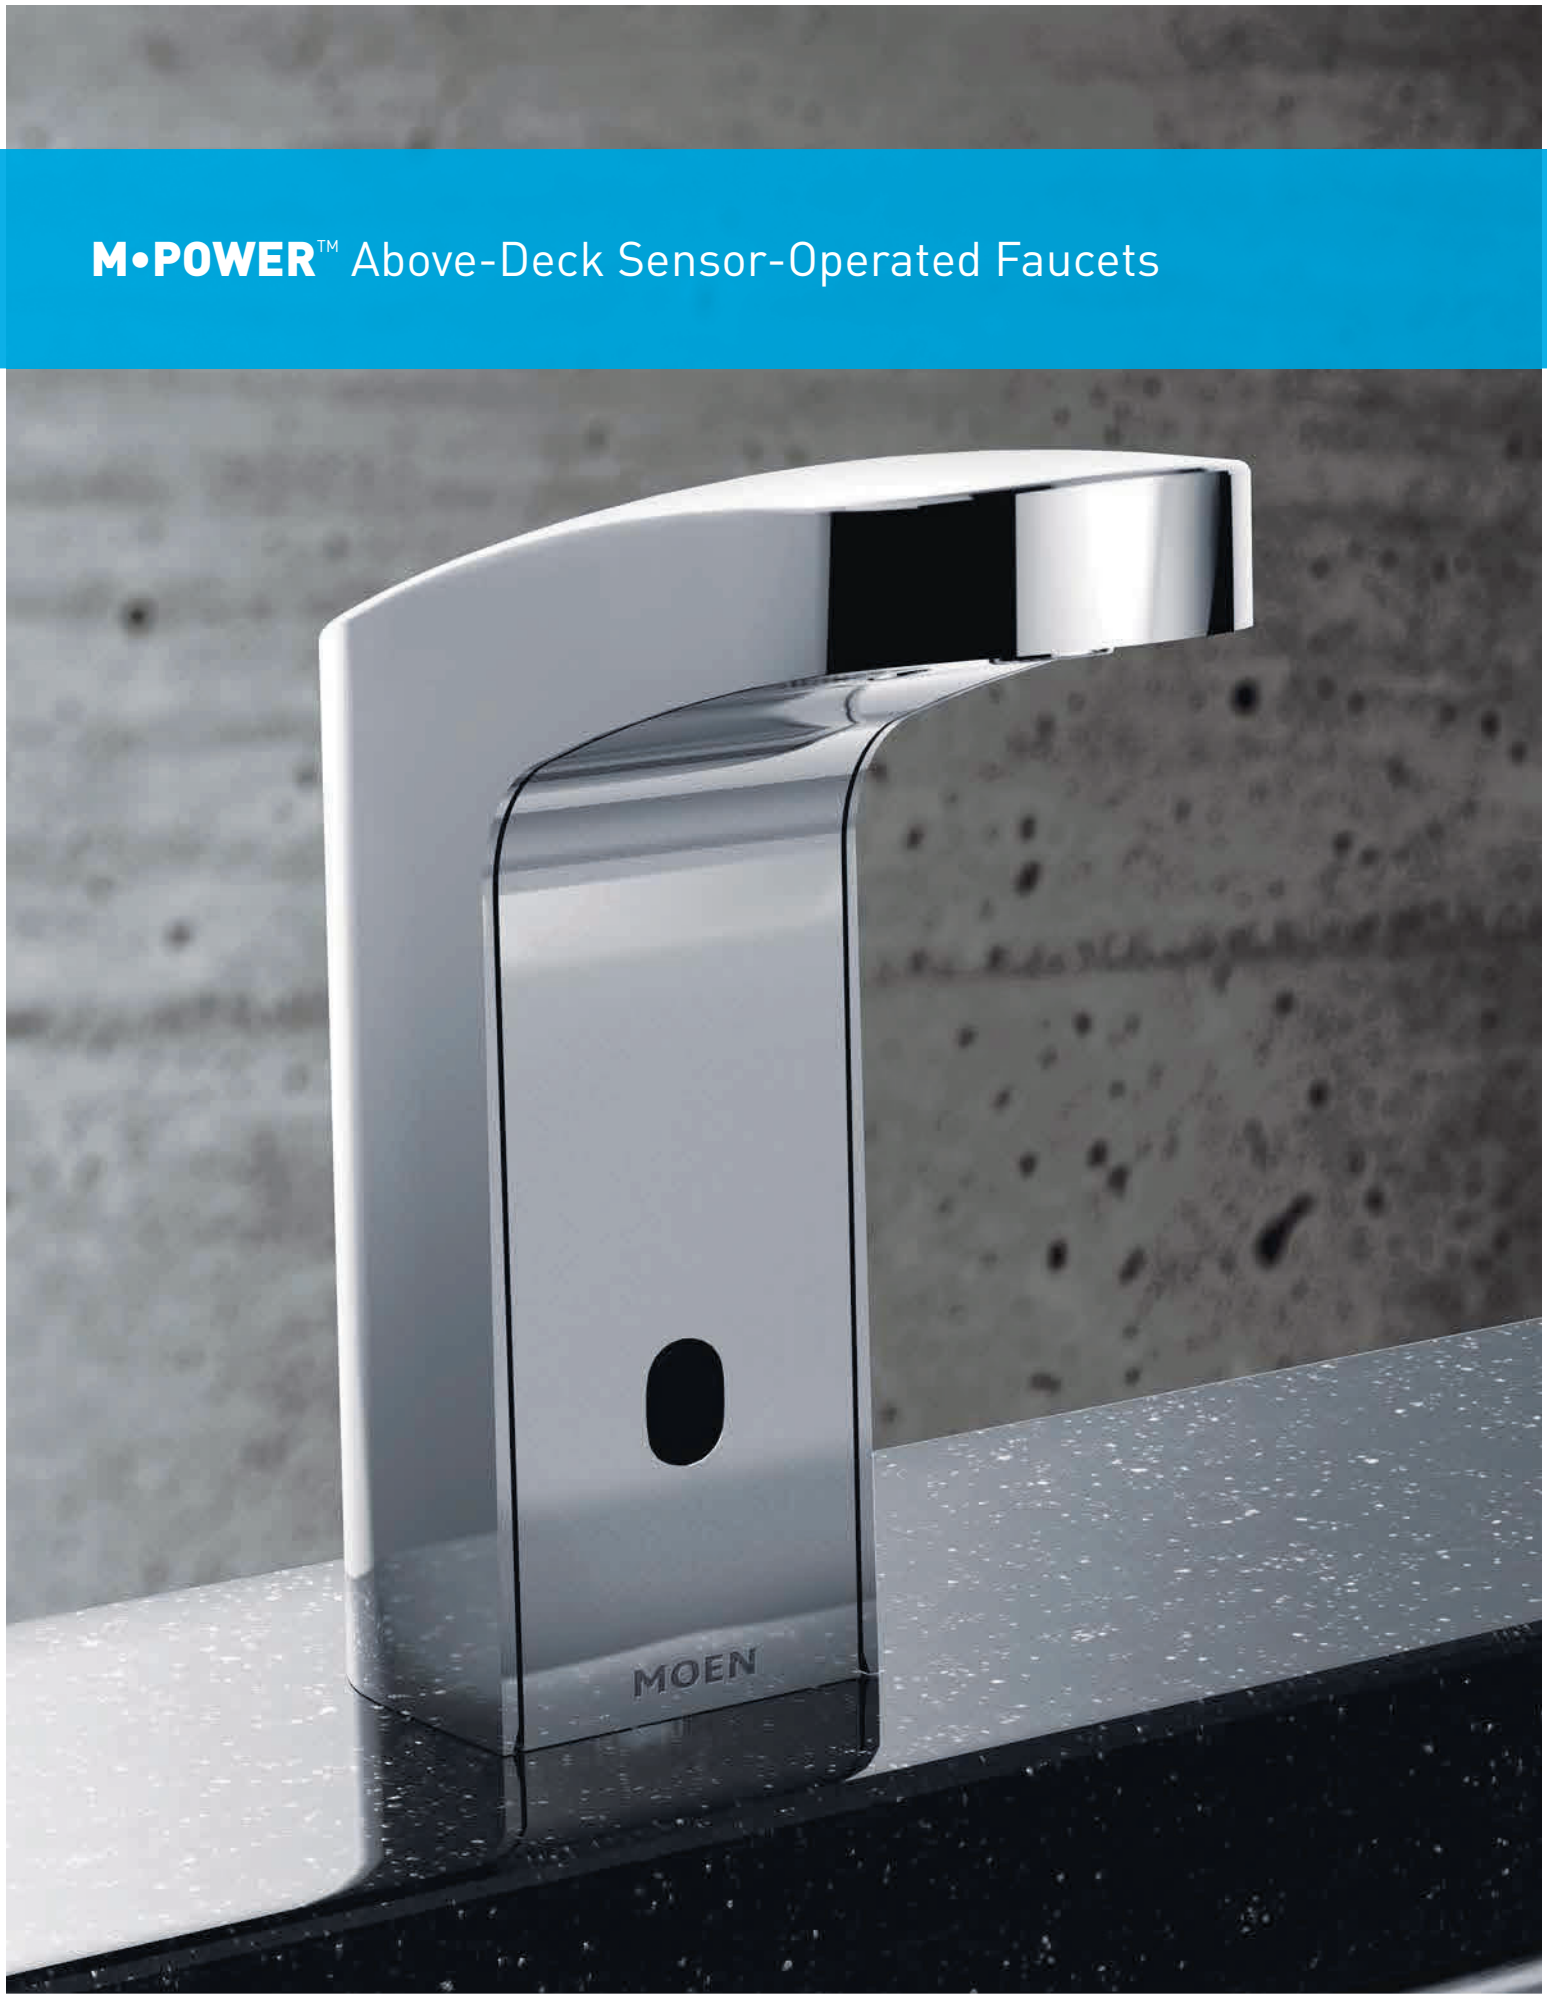



Updated Design: On-Trend Styling
A sleek, new look brings a modern touch to commercial installations.

Clean Performance:
Improved Hygiene and Sanitation
Get more than just hands-free operation. Innovative sentinel flush purges copper waterway every 24 hours to eliminate static water. Laminar flow options further reduce chances of contamination.

Versatile: Advanced Sensor Functionality
State-of-the-art sensor technology stands up to high-use environments and offers cleaning mode that disables activation for easier cleaning.

Simplified Maintenance: Above-the-Deck Access
Battery pack and mechanics are easily accessed from above. LED display informs when batteries need replacement.

Water Savings: Sustainable, Efficient Operation
Choose from several eco-performance flow rates.

Worry-Free Quality: Best-in-Class Five-Year Limited Warranty

ABOVE-DECK SENSOR-OPERATED FAUCET

	Model No.			Description	Wt. Ea. Lbs.	Case Qty.	List Price
	8551	●		Single-mount Battery-powered (4 AA included) Easy battery access 2-piece metal body ⅜" compression connections Non-mixing 0.5 gpm (1.9 lpm) max. vandal-resistant multi-stream laminar flow Without drain	4.5	6	660.95
	8551AC	●		AC-powered [adapter included]	4.6	6	678.95

See page 40 for sensor-operated faucet accessories.

● NSF 372 compliant
ADA compliant BAA compliant Water-saving

ABOVE-DECK SENSOR-OPERATED FAUCET





Model No.			Description	Wt. Ea. Lbs.	Case Qty.	List Price
8552	●		Single-mount Battery-powered (4 AA included) Easy battery access 2-piece metal body ⅜" compression connections Temperature control and manual override 0.5 gpm (1.9 lpm) max. vandal-resistant multi-stream laminar flow Without drain	4.8	6	730.45
8552AC	●		AC-powered [adapter included}	4.9	6	730.45
99556			4" deckplate Designed for 8551, 8551AC, 8552, 8552AC	0.5	20	31.05
99558			8" deckplate Fits 8551, 8551AC, 8552, 8552AC, 8553, 8553AC, 8554, 8554AC	0.9	20	39.95

ABOVE-DECK SENSOR-OPERATED FAUCET



Model No.			Description	Wt. Ea. Lbs.	Case Qty.	List Price
8553	●		Single-mount Battery-powered (4 AA included) Easy battery access 2-piece metal body ⅜" compression connections Non-mixing 0.5 gpm (1.9 lpm) max. vandal-resistant multi-stream laminar flow Without drain	4.2	6	660.95
8553AC	●		AC-powered [adapter included]	4.3	6	678.95

ABOVE-DECK SENSOR-OPERATED FAUCET





Model No.			Description	Wt. Ea. Lbs.	Case Qty.	List Price
8554	●		Single-mount Battery-powered (4 AA included) Easy battery access 2-piece metal body ⅜" compression connections Temperature control and manual override 0.5 gpm (1.9 lpm) max. vandal-resistant multi-stream laminar flow Without drain	4.5	6	730.45
8554AC	●		AC-powered [adapter included]	4.6	6	730.45
99557			4" deckplate Designed for 8553, 8553AC, 8554, 8554AC	0.4	20	31.05
99558			8" deckplate Fits 8551, 8551AC, 8552, 8552AC, 8553, 8553AC, 8554, 8554AC	0.9	20	39.95

See page 40 for sensor-operated faucet accessories.

● NSF 372 compliant
ADA compliant BAA compliant Water-saving


MOEN

M•POWER™ Below-Deck Sensor-Operated Faucets

Optimized Performance: Self-Adaptive Sensor Technology
Adjusts to the environment to work properly without having to make sensor adjustments. A slow-closing solenoid reduces water hammer.

Vandal-Resistant Operation: Smart Sensor Placement
Sensors located on the underside of the spout deter tampering.

Water Savings: Eco-Performance Aerators
A 0.5 gpm aerator reduces water use by 77% compared to standard 2.2 gpm designs.

Worry-Free Quality: Best-in-Class Five-Year Limited Warranty

BELOW-DECK SENSOR-OPERATED FAUCET

	Model No.	Description	Wt. Ea. Lbs.	Case Qty.	List Price
	CA8301	4" centerset Battery-powered* (4 AA included) Solid brass construction ⅜" compression connections Non-mixing 0.5 gpm (1.9 lpm) max. vandal-resistant multi-stream laminar flow Without drain	6.8	6	656.35

BELOW-DECK SENSOR-OPERATED FAUCET

	Model No.	Description	Wt. Ea. Lbs.	Case Qty.	List Price
	CA8302	Single-mount Battery-powered* (4 AA included) Solid brass construction ⅜" compression connections Non-mixing 0.5 gpm (1.9 lpm) max. vandal-resistant multi-stream laminar flow Without drain	6.7	6	647.70

BELOW-DECK SENSOR-OPERATED FAUCET

	Model No.	Description	Wt. Ea. Lbs.	Case Qty.	List Price
	CA8303 ●	Single-mount Battery-powered* (4 AA included) 5⅜" spout reach ⅜" compression connections Non-mixing 0.5 gpm (1.9 lpm) max. vandal-resistant multi-stream laminar flow Without drain	6.2	6	714.25
	104426	4" deckplate Fits CA8302, CA8303	0.6	1	31.25
	104448	8" deckplate Fits CA8302, CA8303, CA8305, CA8306, CA8307, CA8308	0.8	1	45.80

BELOW-DECK SENSOR-OPERATED FAUCET

	Model No.	Description	Wt. Ea. Lbs.	Case Qty.	List Price
	CA8304 ●	Wallmount Battery-powered* (4 AA included) 5⅜" spout reach ⅜" compression connections Non-mixing 0.5 gpm (1.9 lpm) max. vandal-resistant multi-stream laminar flow Without drain	6.7	6	737.45

IMPROVED! LOW-FLOW THERMOSTATIC MIXING VALVE

	Model No.	Description	Wt. Ea. Lbs.	Case Qty.	List Price
	104451 ●	½" FNPT connections Includes ⅜" compression adapters Listed to ASSE Standard 1070 Lavatory faucet application Minimum flow rate at 45 psi=0.35 gpm	3.0	12	173.00

See page 40 for sensor-operated faucet accessories.

*Converts to AC power with the following accessories: single-unit adapter (104427); for multi-unit applications, both one (1) multi-unit adapter (104401) for up to 8 faucets and one (1) lead kit (104402) for each faucet are required.

● NSF 372 compliant


ADA compliant Water-saving


SENSOR-OPERATED FAUCET ACCESSORIES

Part No.	Description	List Price
104020	Manual Temperature Control Handle Kit 8307, 8308	21.75
104021	Solenoid Valve Repair Kit 8301–8304	48.25
104400	In-Line Filter with Check Valve for 8301–8308	53.00
104401	Multi-Unit AC Power Adapter (up to 8 faucets/flush valves) 8301–8304/Flush Valve	99.25
104402	24" Power Cable Lead (1 cable required per faucet) 8301–8304	31.40
104404	Faucet Control Module for 8305, 8307 (DC)	167.20
104405	Faucet Control Module for 8306, 8308 (AC)	167.20
104408	Multi-Unit Adapter, 7.5V, 3A for 8306, 8308	99.25
104424	Mixing Valve with Check Valve for 8301–8308	62.75
104425	Mixing Tee with Check Valve for 8301–8308	24.55
104426	4" Deckplate (with mounting kit) for 8302, 8303	31.25
104427	Single AC Adapter with Shielded Cable for 8301–8304 and All Flush Valves	60.25
104428	4" Deckplate (with mounting kit) for 8305–8308	34.60
104429	Gooseneck Spout (5¾" reach, 10¼" height) 8303, 8304	39.80
104430	Gooseneck Spout (5⅜" reach, 13¼" height) 8303, 8304	53.20
104431	Swing Spout (6" reach, 4¾" height) 8303, 8304	42.10
104432	Swing Spout (8" reach, 5¾" height) 8303, 8304	43.15
104433	Gooseneck Spout (8⅜" reach, 11" height) 8303, 8304	81.05
104434	Control Module for 8301–8304	267.00
104438	Filter Screen for Filter Housing for 8301–8308	8.15
104439	Solenoid Housing for 8301–8304	292.65
104441	Nylon Washer for Filter Housing for 8301–8308	2.25
104443	Supply Rod for 8304 Electronic Faucet	15.60
104444	Supply Line 8305–8308 (1/bag)	29.00
104446	Plug-In AC Single Outlet Power Adapter (with cable) for 8306, 8308	57.40
104447	Hex Key Wrench 8305–8308	2.85
104448	8" Deckplate (with mounting kit) for CA8302, CA8303, CA8305, CA8306, CA8307, CA8308	45.80
104450	Solenoid Coil Kit for 8305–8308	121.60
104456	Sensor Eye Casing for 8301–8304	12.30
104457	O-Ring for Electronic Faucet Spout 8303, 8304	2.40
104458	Split Washer for Electronic Spout 8303, 8304	2.40
104459	Battery Holder for Electronic Faucet 8301–8304	6.20
104460	Spout Nut for Electronic Faucet 8303, 8304	8.80
104534	1.5 gpm Laminar Flow for 8301, 8302, 8305–8308	17.30
104535	0.5 gpm Rosetta Spray for 8301, 8302, 8305–8308	17.30
104539	Set Screw for Electronic Faucet 8305–8308	4.50
109146	6' Sensor Eye and Cable 8301–8304	207.90
174055	Battery Housing for 8551, 8552, 8553, 8554	28.45
174056	Solenoid Repair Kit for All Above-Deck SKUs 8551, 8552, 8553, 8554, 8551AC, 8552AC, 8553AC, 8554AC	90.55
174057	Strain Relief and Sensor Cable Extension for 8551–8554	25.15
174058	AC Adapter for 8551AC, 8552AC, 8553AC, 8554AC	125.25
174059	Y Splitter for Multi-Unit Application for 8551AC, 8552AC, 8553AC, 8554AC	59.00
174060	Mounting Hardware for All Above-Deck SKUs 8551, 8552, 8553, 8554, 8551AC, 8552AC, 8553AC, 8554AC	15.95
174061	Manual Temperature Control Handle Kit 8552, 8554, 8552AC, 8554AC	22.35
174062	T10 Torx Key and Screw for All Above-Deck SKUs 8551, 8552, 8553, 8554, 8551AC, 8552AC, 8553AC, 8554AC	8.25
174065	In-Line Filter with Check Valve for All Above-Deck SKUs 8551, 8552, 8553, 8554, 8551AC, 8552AC, 8553AC, 8554AC	45.20
174066	Filter Screen for Filter Housing for All Above-Deck SKUs 8551, 8552, 8553, 8554, 8551AC, 8552AC, 8553AC, 8554AC	5.20
174334	Sensor and Bracket for 8551, 8552, 8551AC, 8552AC	178.80
174335	Sensor and Bracket for 8553, 8554, 8553AC, 8554AC	178.80
174336	Override Plug Button for 8552, 8552AC	17.70
174337	Override Plug Button for 8554, 8554AC	17.70
52016F10	1.0 gpm Aerator for All Above-Deck SKUs 8551, 8552, 8553, 8554, 8551AC, 8552AC, 8553AC, 8554AC	17.30
52018F15	1.5 gpm Laminar Aerator for All Above-Deck SKUs 8551, 8552, 8553, 8554, 8551AC, 8552AC, 8553AC, 8554AC	17.30



M•POWER™ Sensor-Operated Flush Valves

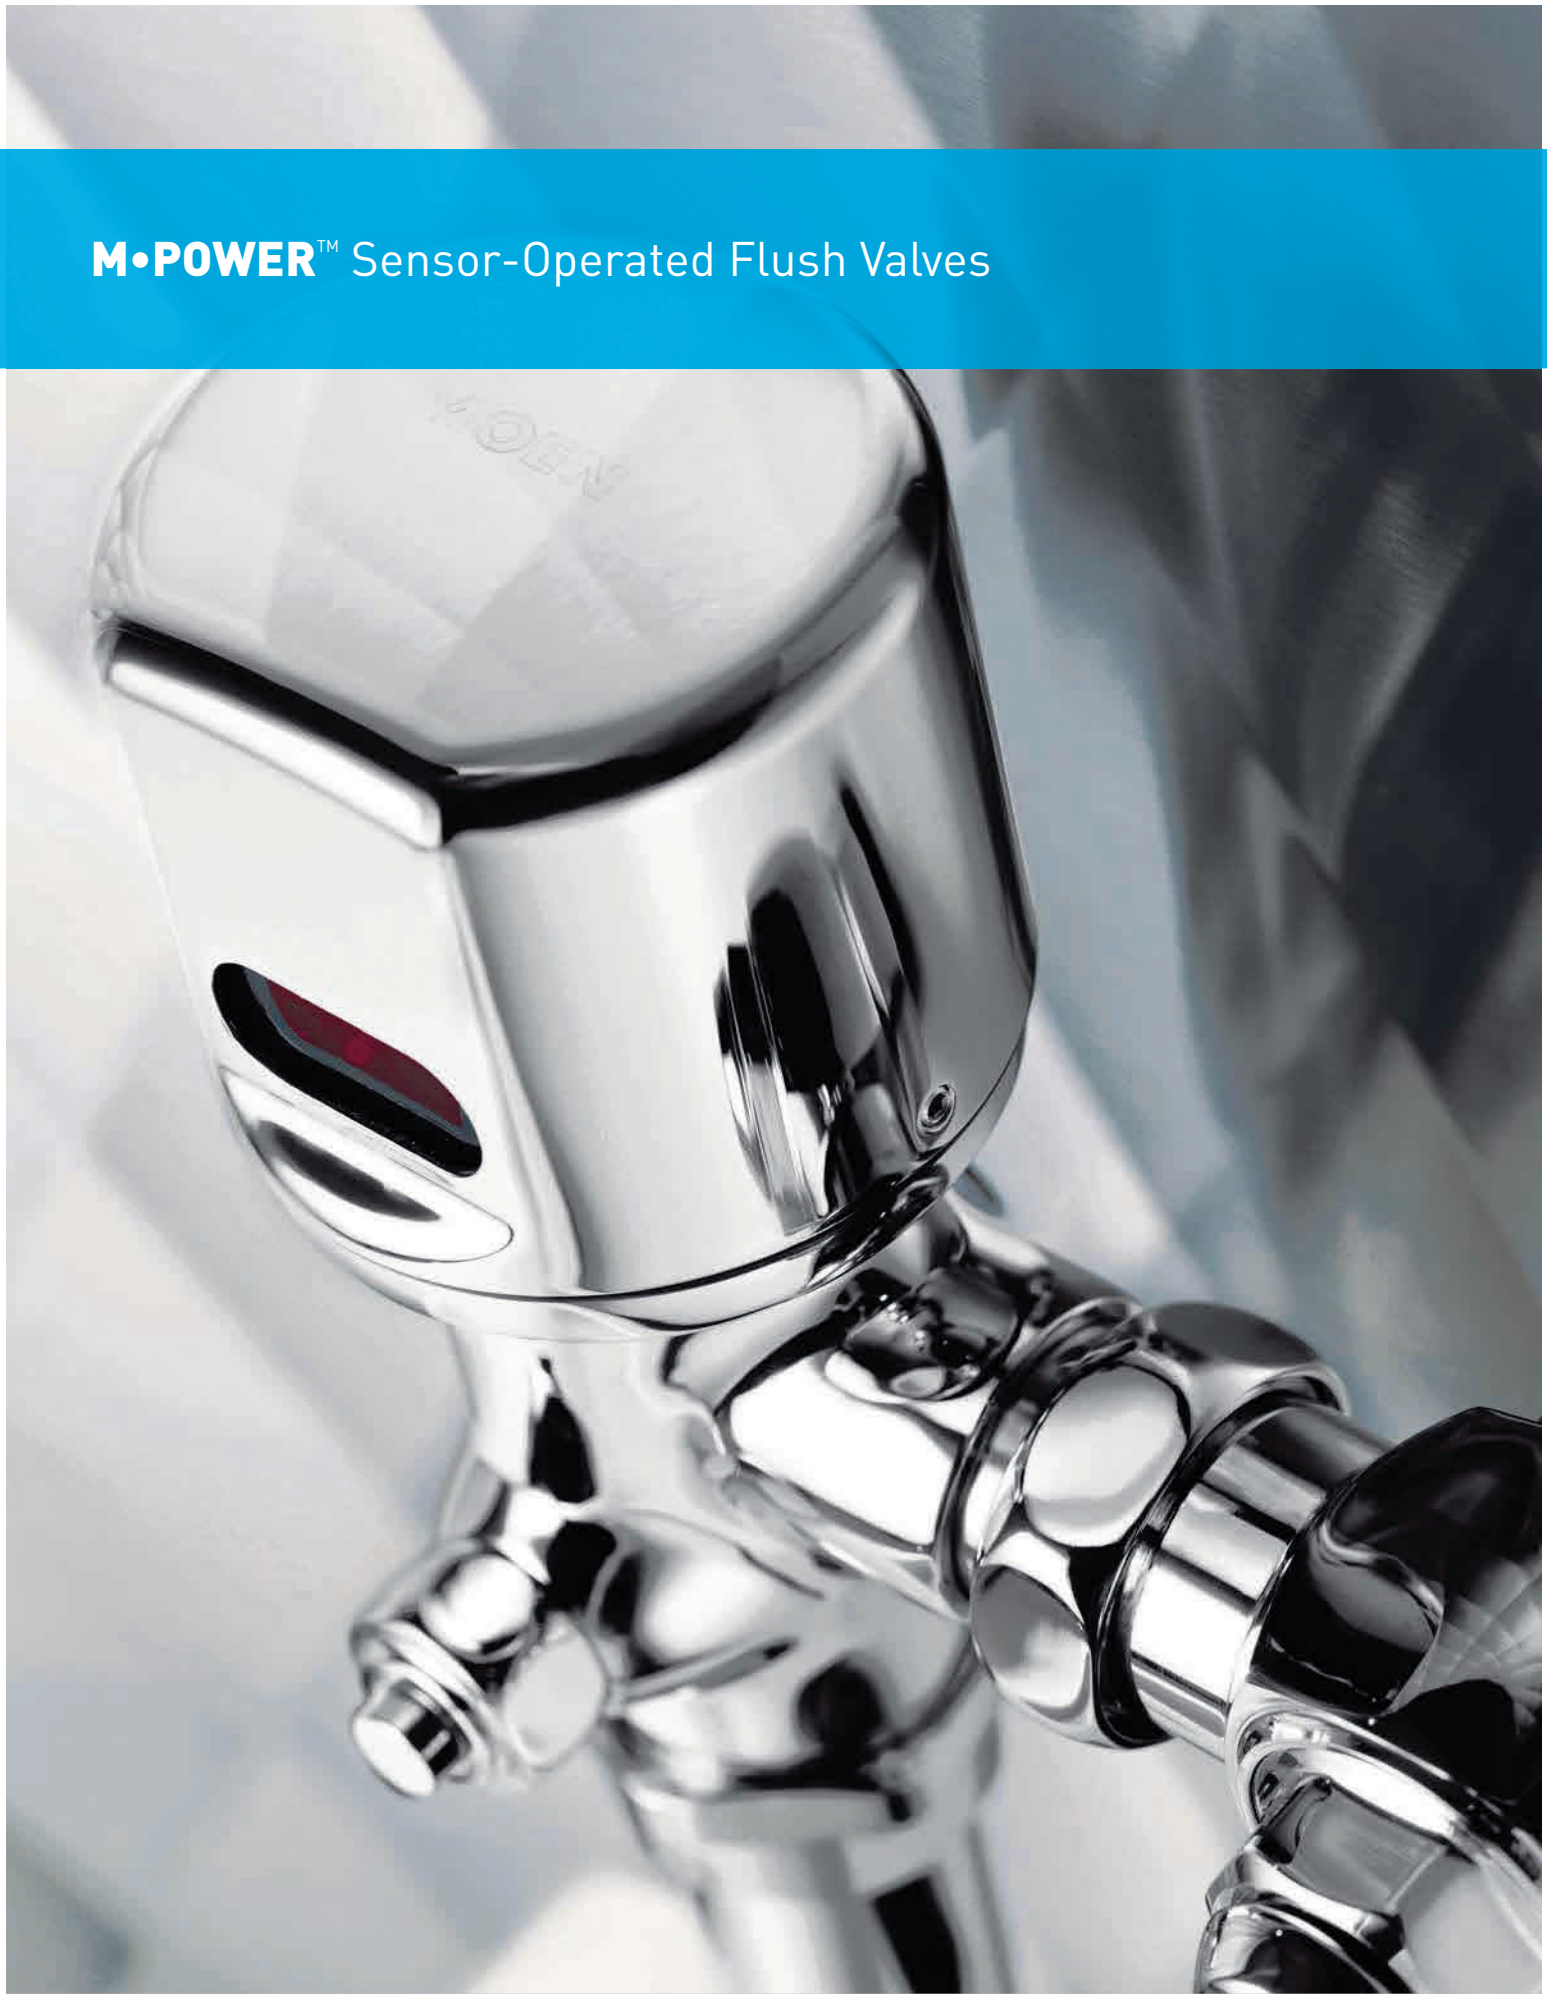

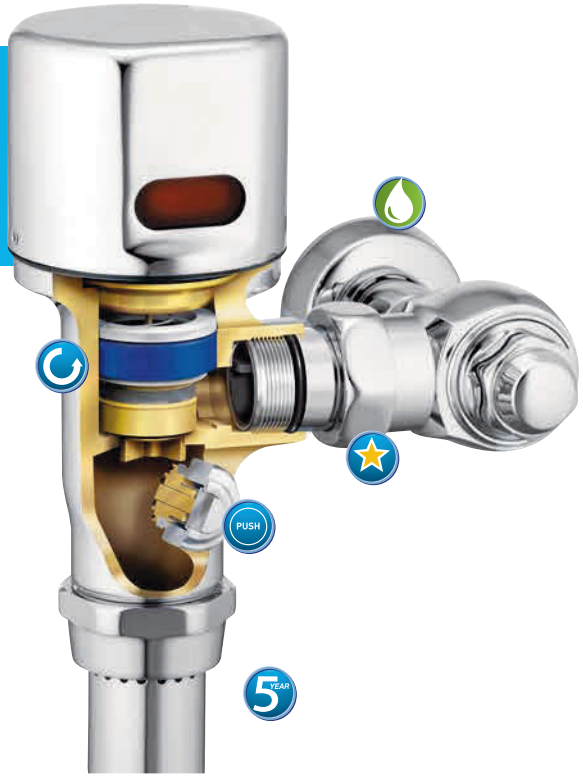

Reduced Maintenance: Self-Cleaning Piston Technology
Internal filter screen and self-lubricating silicone seals guard against damage and leaks.

Maximum Efficiency: Field-Adjustable Flow Rates
Simplifies parts inventory by offering flexibility to work in different applications.

Consistent Performance: Wide Operating Pressure Range
Consistent, powerful flushes in any range from 10 psi to 120 psi.

Reliable Operation: Manual Mechanical Override
Manual button ensures the system operates in power outages.

Worry-Free Quality: Best-in-Class Five-Year Limited Warranty

1½" SENSOR-OPERATED FLUSH VALVE

	Model No.		Description	Wt. Ea. Lbs.	Case Qty.	List Price
	8310		Closet Solid brass construction Battery-powered (4 AA included) Easy battery access Manual mechanical override button Heavy-duty piston technology 1.6 gpf (6.0 lpf) max.	9.5	4	596.45
	8311		1.28 gpf (4.8 lpf) max.	9.5	4	596.45
	8310DF16		**Dual Flush Technology** 1.0/1.6 gpf (3.8/6.0 lpf) max.	9.5	4	626.20

Intended for use with matching flow rates as specified by the fixture manufacturer.

ADA compliant Water-saving

1½" SENSOR-OPERATED FLUSH VALVE

Model No.	Description	Wt. Ea. Lbs.	Case Qty.	List Price
 8313	Closet Solid brass construction **24" extension tube** Battery-powered (4 AA included) Easy battery access Manual mechanical override button Heavy-duty piston technology 1.6 gpf (6.0 lpf) max.	12.0	4	598.20

1½" SENSOR-OPERATED FLUSH VALVE

Model No.	Description	Wt. Ea. Lbs.	Case Qty.	List Price
 8310AC16	Closet Solid brass construction AC-powered Requires 12V transformer (sold separately)* Manual override button Heavy-duty piston technology 1.6 gpf (6.0 lpf) max.	10.7	4	596.45
8311AC12	1.28gpf (4.8 lpf) max.	10.7	4	596.45
8310ACDF16	**Dual Flush Technology** 1.0/1.6 gpf (3.8/6.0 lpf) max.	10.7	4	626.20

DUAL FLUSH™

SENSOR-OPERATED FLUSH VALVE RETROFIT KIT

	Model No.	Description	Wt. Ea. Lbs.	Case Qty.	List Price
	8310R16	Closet Solid brass construction Battery-powered (4 AA included) Easy battery access Manual mechanical override button Heavy-duty piston technology 1.6 gpf (6.0 lpf) max.	7.0	8	499.10
	8310RDF16	Closet **Dual Flush Technology** 1.0/1.6 gpf (3.8/6.0 lpf) max.	7.0	4	524.00

¾" SENSOR-OPERATED FLUSH VALVE

	Model No.	Description	Wt. Ea. Lbs.	Case Qty.	List Price
	8312	Urinal Solid brass construction Battery-powered (4 AA included) Easy battery access Manual mechanical override button Heavy-duty piston technology 1.0 gpf (3.8 lpf) max.	9.2	4	596.45
	8315	0.5 gpf (1.9 lpf) max.	9.2	4	596.45
	8316	**Pint flush** 0.125 gpf (0.5 lpf) max.	9.2	4	596.45

Intended for use with matching flow rates as specified by the fixture manufacturer.

1¼" SENSOR-OPERATED FLUSH VALVE

	Model No.	Description	Wt. Ea. Lbs.	Case Qty.	List Price
	8314	Urinal Solid brass construction Battery-powered (4 AA included) Easy battery access Manual mechanical override button Heavy-duty piston technology 1.0 gpf (3.8 lpf) max.	9.5	6	596.45

¾" SENSOR-OPERATED FLUSH VALVE

	Model No.	Description	Wt. Ea. Lbs.	Case Qty.	List Price
	8312AC10	Urinal Solid brass construction AC-powered Requires 12V transformer (sold separately)* Manual override button Heavy-duty piston technology 1.0 gpf (3.8 lpf) max.	11.5	4	596.45
	8315AC05	0.5 gpf (1.9 lpf) max.	11.5	4	596.45
	8316AC	**Pint flush** 0.125 gpf (0.5 lpf) max.	11.5	4	596.45

SENSOR-OPERATED FLUSH VALVE RETROFIT KIT

	Model No.	Description	Wt. Ea. Lbs.	Case Qty.	List Price
	8312R10	Urinal Solid brass construction Battery-powered (4 AA included) Easy battery access Manual mechanical override button Heavy-duty piston technology 1.0 gpf (3.8 lpf) max.	7.0	8	499.10

Intended for use with matching flow rates as specified by the fixture manufacturer.

*Single AC adapter (104406) or multi-unit adapter (104401) sold separately.


ADA compliant WaterSense® Water-saving


SENSOR-OPERATED FLUSH VALVE ACCESSORIES

Part No.	Description	List Price
104334	Control Module 1.6 gpf Closet	156.10
104401	Multi-Unit AC Power Adapter (up to 8 faucets/flush valves) 8301–8304/Flush Valve	99.25
104403	Control Module 1.0 gpf Urinal	156.10
104406	AC Adapter for Flush Valves (powers 1 unit)	33.40
104435	Flush Valve Solenoid Coil Kit	133.75
104437	Flush Valve Control Disk Valve	39.10
104440	Flush Valve Battery Holder (2/bag)	6.20
104449	Vandal-Proof Screws with O-Ring for Flush Valve (12/bag)	35.15
104452	Control Module 1.28 gpf Closet	156.10
104453	AC Tube and Wall Flange	55.70
104454	AC Flush Valve Cap	90.35
104455	DC Flush Valve Cap	79.20
104461	Manual Override Replacement Plug	29.35
104500	2 ¼" (standard) Extension Nipple (compatible with Delany angle stops)	35.70
104501	1 ¾" Extension Nipple (compatible with Delany angle stops)	31.25
104502	2 ¾" Extension Nipple (compatible with Delany angle stops)	43.50
104503	3 ¼" Extension Nipple (compatible with Delany angle stops)	48.00
104504	3 ¾" Extension Nipple (compatible with Delany angle stops)	53.50
104505	4 ¼" Extension Nipple (compatible with Delany angle stops)	59.10
104506	2 ⅛" (standard) Extension Nipple (compatible with Sloan-Moen Style)	31.25
104507	2 ½" Extension Nipple*	34.60
104508	3" Extension Nipple*	36.80
104509	3 ½" Extension Nipple*	40.15
104510	4" Extension Nipple*	44.60
104511	4 ½" Extension Nipple*	48.00
104512	5" Extension Nipple*	53.50
104513	5 ½" Extension Nipple*	56.90
104514	6" Extension Nipple*	61.35
104515	1 ½" Flush Extension Tube–24"	104.10
104516	Split Ring Wall Support	71.20
104517	Flush Valve Trap Primer	102.95
104518	1" Sweat Kit, Flush Valve	30.15
104519	1" Sweat Kit, Flush Valve 6" Long	42.40
104520	Sensor Eye/Wires for Flush Valve	74.75
104521	1" Angle Stop Valve Flush Valve	107.40
104522	¾" Angle Stop Valve Flush Valve	107.40
104523	Angle Stop Repair Kit	18.80
104524	Flush Valve Manual Override Button	35.15
104525	Vacuum Breaker Kit	17.55
104526	Brass Valve Body Nut Flush Valve	23.45
104527	O-Ring (large) for Flush Valve Seat	5.35
104528	1 ½" Brass Flush Valve Tube	41.00
104529	1 ¼" Brass Flush Tube	39.85
104530	¾" Brass Flush Tube	38.80
104531	1 ½" Top Spud Assembly	41.00
104532	1 ¼" Top Spud Assembly	38.80
104533	¾" Top Spud Assembly	34.30
104536	Plastic Flush Valve Cap Mount Bracket	17.80
104537	Piston Tip Assembly Service Kit (10 tips/bag)	33.50
104538	Urinal Tailpiece (24" x ¾")	104.80
104560	Offset Flush Tube 22½" x 1½"	41.70

*Compatible with Moen M•DURA™, Sloan, Zurn, American Standard, Kohler and Toto angle stops.

M•DURA™ Heavy-Duty Manual Flush Valves

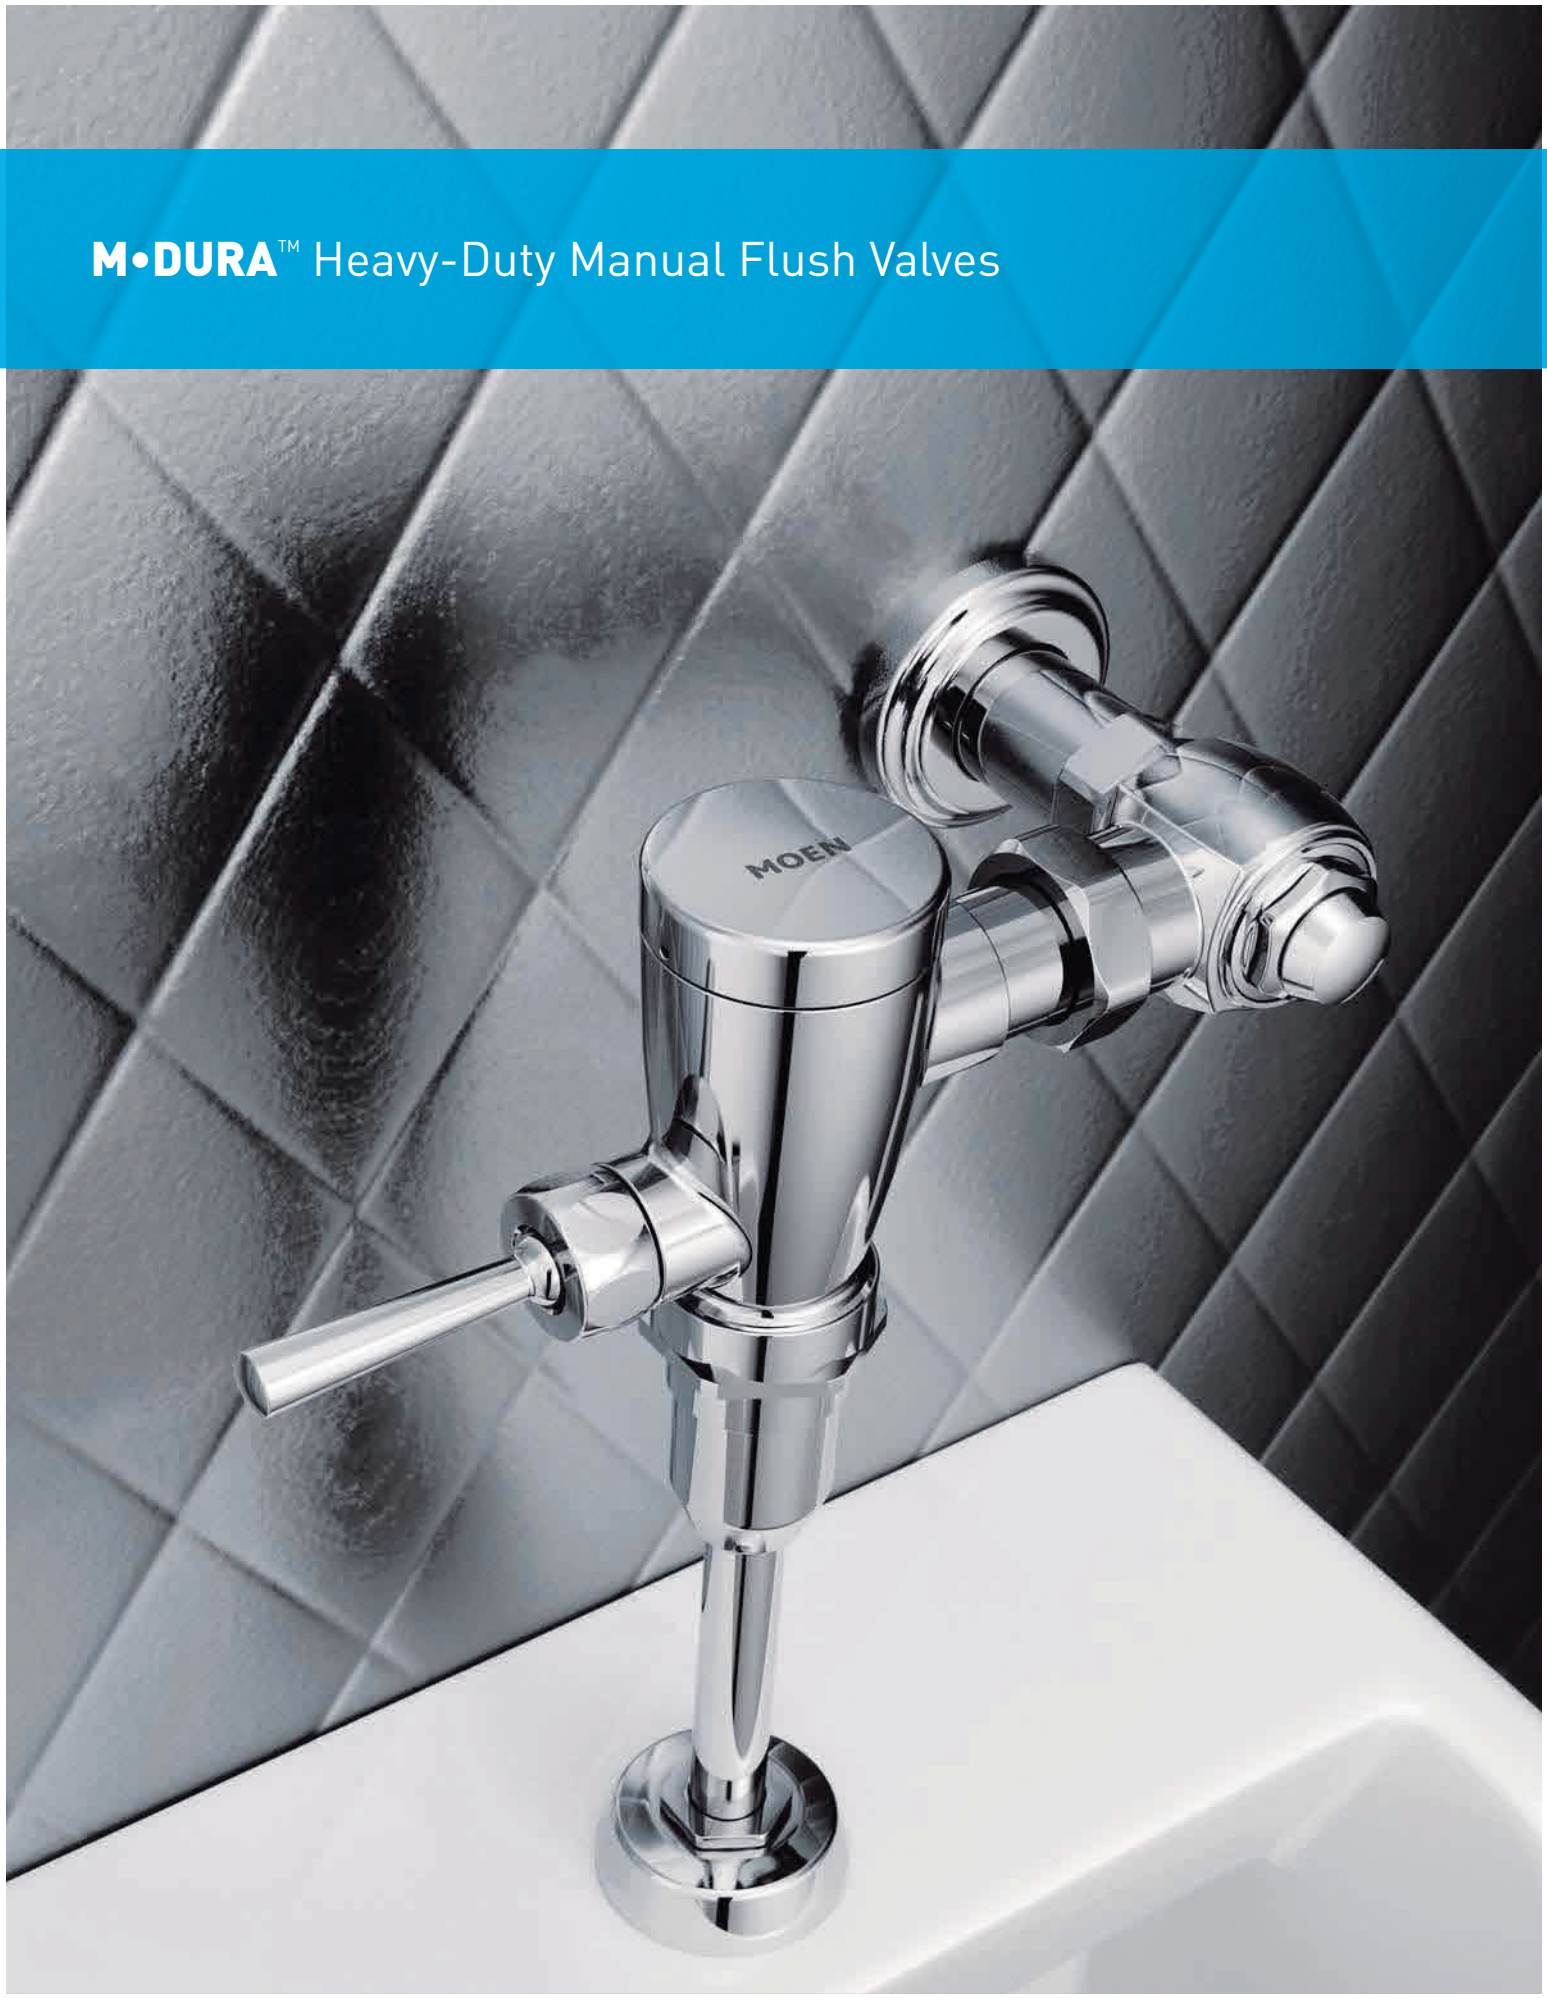

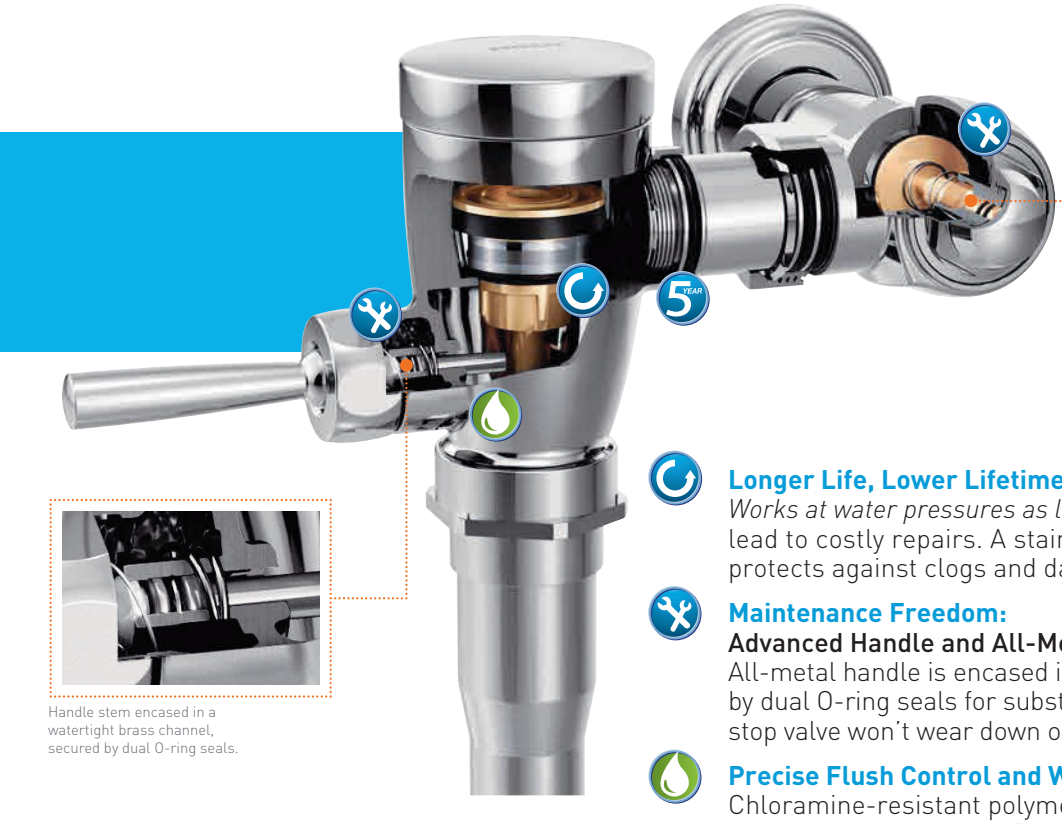

Handle stem encased in a watertight brass channel, secured by dual O-ring seals.



Heavy-duty metal stop valve with dual O-ring seals.

Longer Life, Lower Lifetime Cost: AccuSet™ Piston Technology
Works at water pressures as low as 15 psi, so fluctuations won't lead to costly repairs. A stainless steel, self-cleaning filter protects against clogs and damage from line debris.

Maintenance Freedom:
Advanced Handle and All-Metal Stop Valve Design
All-metal handle is encased in a watertight brass channel, secured by dual O-ring seals for substantial leak protection; heavy-duty metal stop valve won't wear down or break apart like plastic assemblies.

Precise Flush Control and Water Savings: Premium Sealing
Chloramine-resistant polymer seals prevent breakdowns and leaks, allowing M•DURA™ to deliver precise flush volume over the life of the product.

Worry-Free Quality: Robust Design, Heavy-Duty Construction
Best-in-class five-year limited warranty.

1½" MANUAL CLOSET FLUSH VALVE

	Model No.	Description	Wt. Ea. Lbs.	Case Qty.	List Price
	8310M35	Closet Solid brass construction 3.5 gpf (13.2 lpf) **AccuSet™ piston technology** with self-cleaning filter ADA compliant non-hold open handle with dual O-ring seals High back-pressure vacuum breaker **All brass shut-off with chloramine-resistant face seal**	5.25	3	181.85
	8310M16	1.6 gpf (6.0 lpf)	5.25	3	181.85
	8310M128	1.28 gpf (4.8 lpf)	5.25	3	181.85

Intended for use with matching flow rates as specified by the fixture manufacturer.

To help meet and maintain facilities building codes, Moen M•DURA flush valves are third-party certified by IAPMO and CSA to all applicable standards.
ADA compliant BAA compliant Water-saving

1½" MANUAL CLOSET FLUSH VALVE 24" EXTENDED LENGTH

	Model No.	Description	Wt. Ea. Lbs.	Case Qty.	List Price
	8313M16	Closet **24" extension tube** Solid brass construction 1.6 gpf (6.0 lpf) **AccuSet™ piston technology** with self-cleaning filter ADA compliant non-hold open handle with dual O-ring seals High back-pressure vacuum breaker **All brass shut-off with chloramine-resistant face seal**	5.4	3	195.65

¾" MANUAL URINAL FLUSH VALVE

	Model No.	Description	Wt. Ea. Lbs.	Case Qty.	List Price
	8312M10	Urinal Solid brass construction 1.0 gpf (3.8 lpf) **AccuSet™ piston technology** with self-cleaning filter ADA compliant non-hold open handle with dual O-ring seals High back-pressure vacuum breaker **All brass shut-off with chloramine-resistant face seal**	4.5	3	181.85
	8312M05	0.5 gpf (1.9 lpf)	4.5	3	181.85
	8312M0125	**Pint flush** 0.125 gpf (0.5 lpf)	4.5	3	181.85

1¼" MANUAL URINAL FLUSH VALVE

	Model No.	Description	Wt. Ea. Lbs.	Case Qty.	List Price
	8314M10	Urinal Solid brass construction 1.0 gpf (3.8 lpf) **AccuSet™ piston technology** with self-cleaning filter ADA compliant non-hold open handle with dual O-ring seals High back-pressure vacuum breaker **All brass shut-off with chloramine-resistant face seal**	4.5	3	181.85

MANUAL FLUSH VALVE RETROFIT KIT



Model No.	Description	Wt. Ea. Lbs.	Case Qty.	List Price
8310MR35	Closet Solid brass construction 3.5 gpf (13.2 lpf) **AccuSet™ piston technology** with self-cleaning filter ADA compliant non-hold open handle with dual O-ring seals	4.0	6	146.30
8310MR16	Closet 1.6 gpf (6.0 lpf)	4.0	6	146.30
8310MR128	Closet 1.28 gpf (4.8 lpf)	4.0	6	146.30
8312MR10	Urinal 1.0 gpf (3.8 lpf)	4.0	6	146.30
8312MR05	Urinal 0.5 gpf (1.9 lpf)	4.0	6	146.30
8312MR0125	Urinal **Pint flush** 0.125 gpf (0.5 lpf)	4.0	6	146.30

1½" MANUAL CLOSET FLUSH VALVE WITH BEDPAN WASHER



Model No.	Description	Wt. Ea. Lbs.	Case Qty.	List Price
8310BPW35	Closet Solid brass construction 3.5 gpf (13.2 lpf) **AccuSet™ piston technology** with self-cleaning filter ADA compliant non-hold open handle Pivot arm O-ring provides consistent seal integrity Ergonomic spray head with rounded edges High back-pressure vacuum breaker **All brass shut-off with chloramine-resistant face seal**	9.25	2	555.05
8310BPW16	1.6 gpf (6.0 lpf)	9.25	2	555.05

BEDPAN WASHER DIVERTER KIT



Model No.	Description	Wt. Ea. Lbs.	Case Qty.	List Price
8310BPWR	Solid brass construction Ergonomic spray head with rounded edges Pivot arm O-ring provides consistent seal integrity	5.25	3	401.30

Intended for use with matching flow rates as specified by the fixture manufacturer.

To help meet and maintain facilities building codes, Moen M•DURA flush valves are third-party certified by IAPMO and CSA to all applicable standards.

ADA compliant BAA compliant WaterSense® Water-saving

MANUAL FLUSH VALVE ACCESSORIES

Part No.	Description	List Price
104540	M•DURA™ 2¼" Extension (standard) Nipple (compatible with Delany angle stops)	35.70
104541	M•DURA™ 1¾" Extension Nipple (compatible with Delany angle stops)	31.25
104542	M•DURA™ 2¾" Extension Nipple (compatible with Delany angle stops)	43.50
104543	M•DURA™ 3¼" Extension Nipple (compatible with Delany angle stops)	48.00
104544	M•DURA™ 3¾" Extension Nipple (compatible with Delany angle stops)	53.50
104545	M•DURA™ 4¼" Extension Nipple (compatible with Delany angle stops)	59.10
104546	M•DURA™ 2⅛" Extension (standard) Nipple*	31.25
104547	M•DURA™ 2½" Extension Nipple*	34.60
104548	M•DURA™ 3" Extension Nipple*	36.80
104549	M•DURA™ 3½" Extension Nipple*	40.15
104550	M•DURA™ 4" Extension Nipple*	44.60
104551	M•DURA™ 4½" Extension Nipple*	48.00
104552	M•DURA™ 5" Extension Nipple*	53.50
104553	M•DURA™ 5½" Extension Nipple*	56.90
104554	M•DURA™ 6" Extension Nipple*	61.35
104555	M•DURA™ 1" Angle Stop	107.40
104556	M•DURA™ ¾" Angle Stop	107.40
104557	M•DURA™ Angle Stop Repair Kit	18.80
104560	M•DURA™ Offset Flush Tube 22½" x 1½"	41.70
104561	M•DURA™ Cap Assembly	58.90
104563	M•DURA™ 3.5 gpf (13.2 lpf) Piston	79.20
104564	M•DURA™ 1.6 gpf (6.0 lpf) Piston	79.20
104565	M•DURA™ 1.28 gpf (4.8 lpf) Piston	79.20
104566	M•DURA™ 1.0 gpf (3.8 lpf) Piston	79.20
104567	M•DURA™ 0.5 gpf (1.9 lpf) Piston	79.20
104568	M•DURA™ 0.125 gpf (0.5 lpf) Piston	79.20
104569	M•DURA™ Handle Assembly	23.75
104570	M•DURA™ Vacuum Breaker Assembly	17.55
104571	M•DURA™ Body Nut	23.45
104572	M•DURA™ Angle Stop Replacement Cap	6.10
104578	M•DURA™ Flush Tube 8½" x 1½"	44.80
104579	M•DURA™ Flush Tube 8" x 1¼"	48.65
104580	M•DURA™ Flush Tube 8" x 1¾"	44.90
104581	M•DURA™ 1½" Top Spud Assembly	31.40
104582	M•DURA™ 1¼" Top Spud Assembly	28.55
104583	M•DURA™ ¾" Top Spud Assembly	24.55
104584	M•DURA™ Flush Extension Tube 24" x ¾"	73.10
104585	M•DURA™ Flush Extension Tube 24" x 1½"	115.15
104588	M•DURA™ Sweat Kit (1" supply) 3" length	26.40
104589	M•DURA™ Sweat Kit (1" supply) 6" length	42.40
104590	M•DURA™ Cap Assembly with 3.5 gpf Marking	25.25
104591	M•DURA™ Cap Assembly with 1.6 gpf Marking	25.25
104592	M•DURA™ Cap Assembly with 1.28 gpf Marking	25.25
104593	M•DURA™ Cap Assembly with 1.0 gpf Marking	25.25
104594	M•DURA™ Cap Assembly with 0.5 gpf Marking	25.25
104595	M•DURA™ Cap Assembly with 0.125 gpf Marking	25.25
104597	M•DURA™ Tail Piece and Interior Cap Tool	16.80
104598	M•DURA™ Sweat Kit (¾" supply) 3" length	24.85
104599	M•DURA™ Sweat Kit (¾" supply) 6" length	44.60
104609	M•DURA™ Piston Gaskets	9.75


BEDPAN WASHER ACCESSORIES

Part No.	Description	List Price
104573	M•DURA™ Bedpan Washer Seal Kit	22.70
104574	M•DURA™ Bedpan Washer Seal Kit	49.65
104575	M•DURA™ Bedpan Washer Arm Assembly	49.65
104577	M•DURA™ Bedpan Washer Spray Face	10.65
104600	M•DURA™ Offset Flush Tube 8" x 1½"	47.95
SMA100CH*	SecureMount™ anchors, 1 pair, for use with bedpan washer wallmount flange	29.40


*Compatible with Moen M•POWER™, Sloan, Zurn, American Standard, Kohler and Toto angle stops.



M•DURA™ Heavy-Duty Tub/Shower

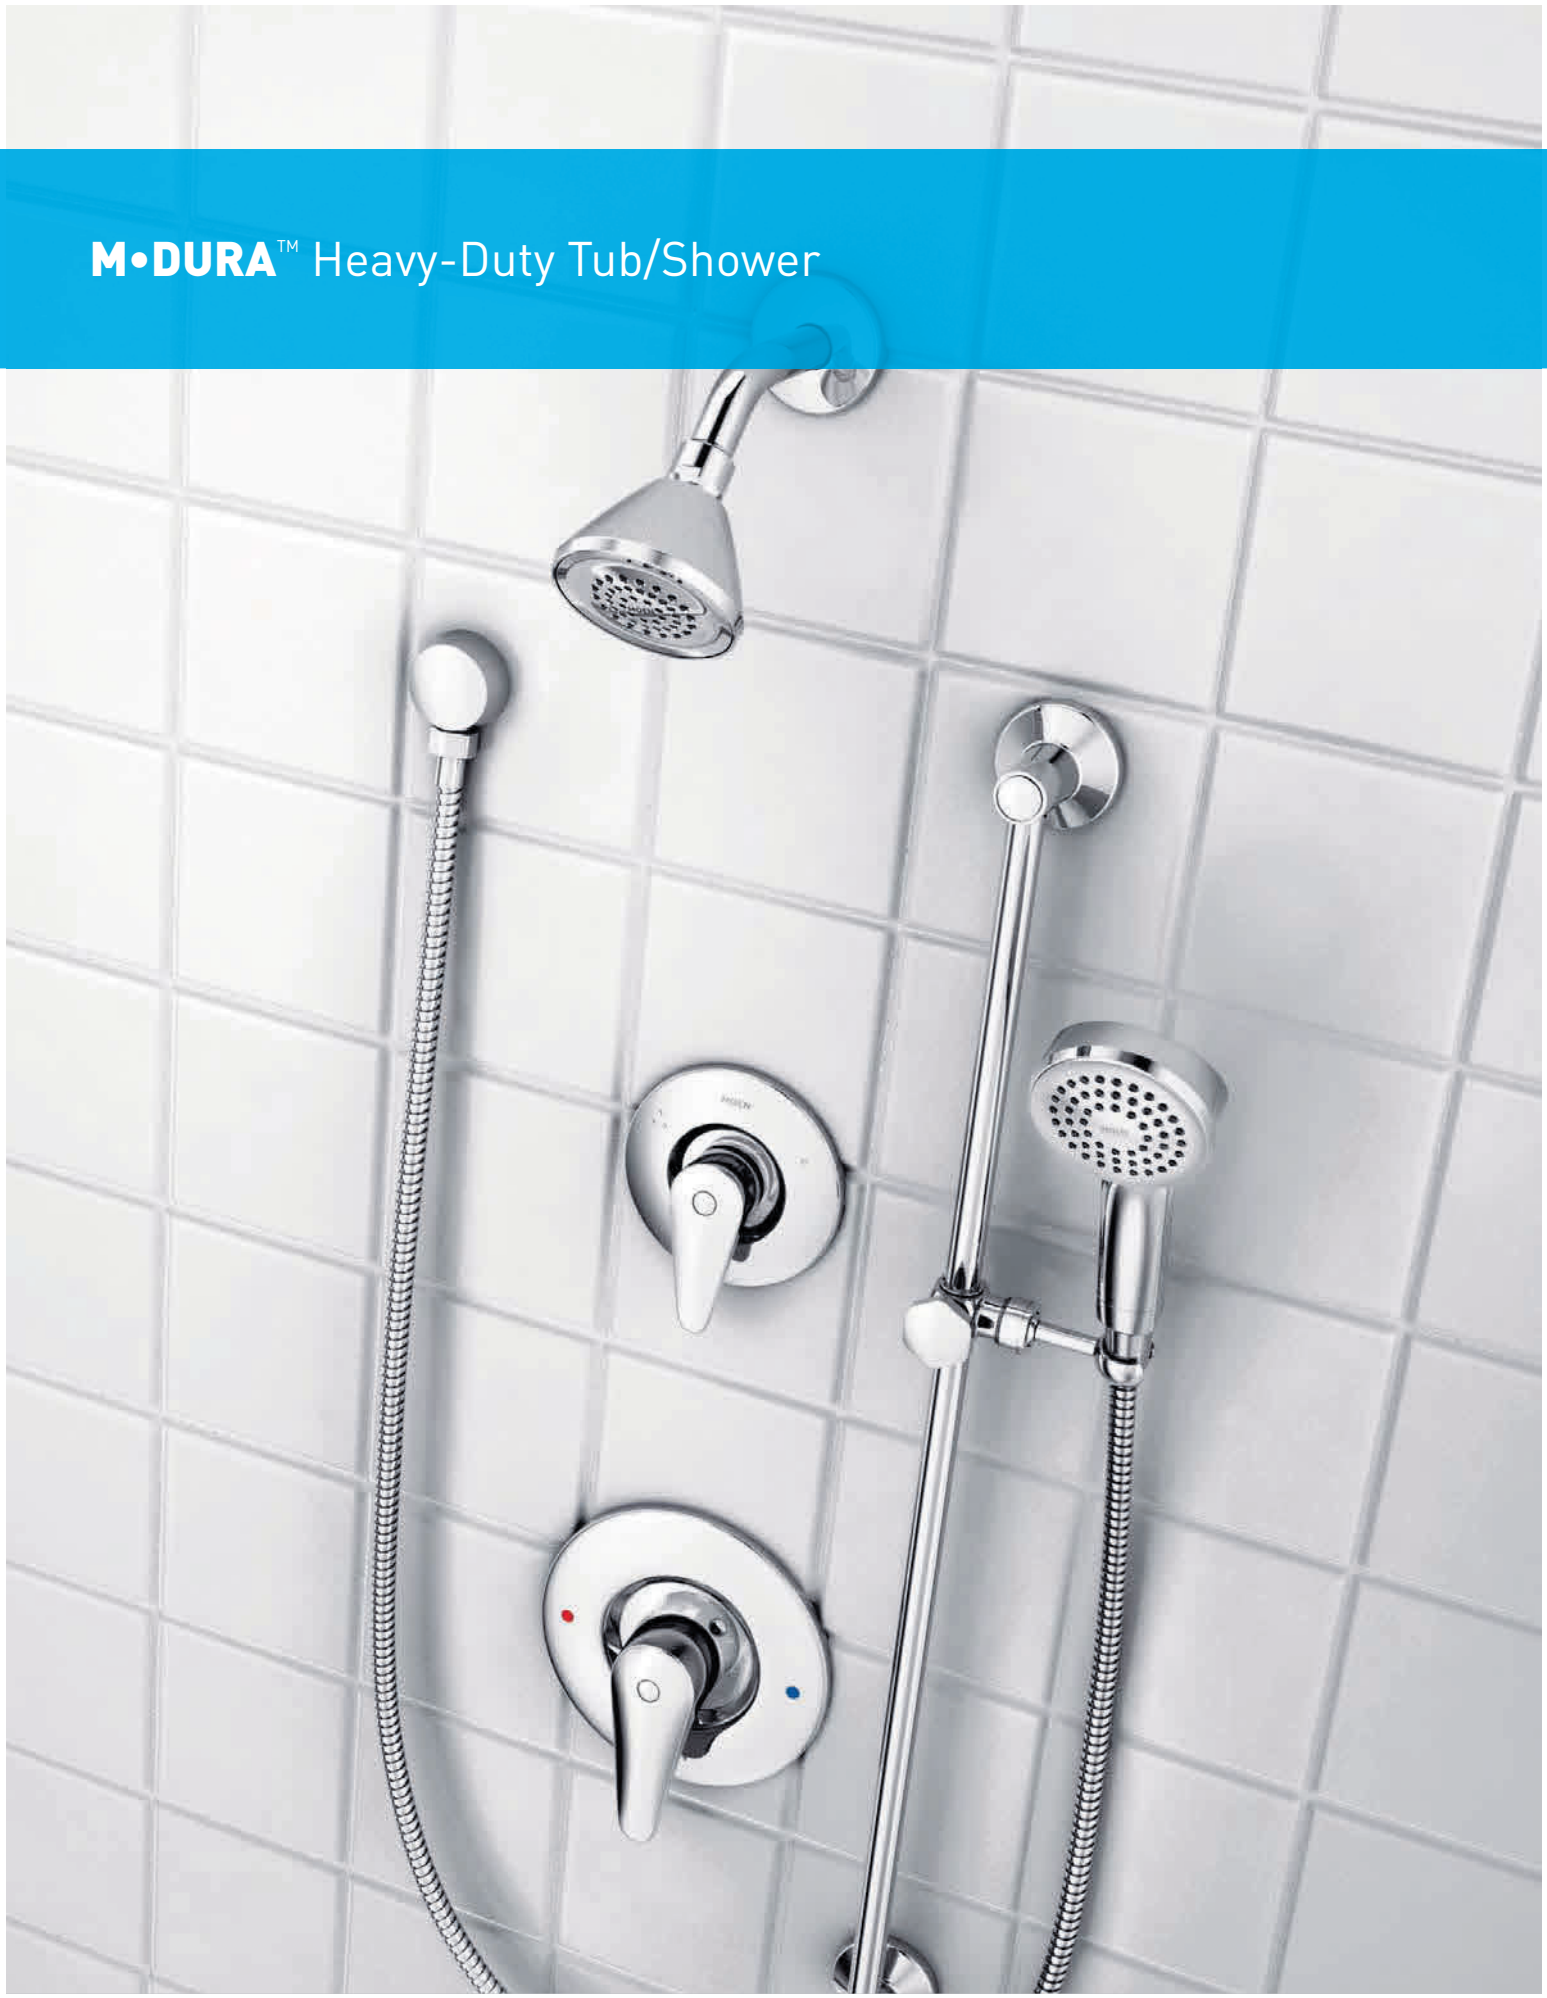

M•DURA™ An invigorating shower at every flow rate.

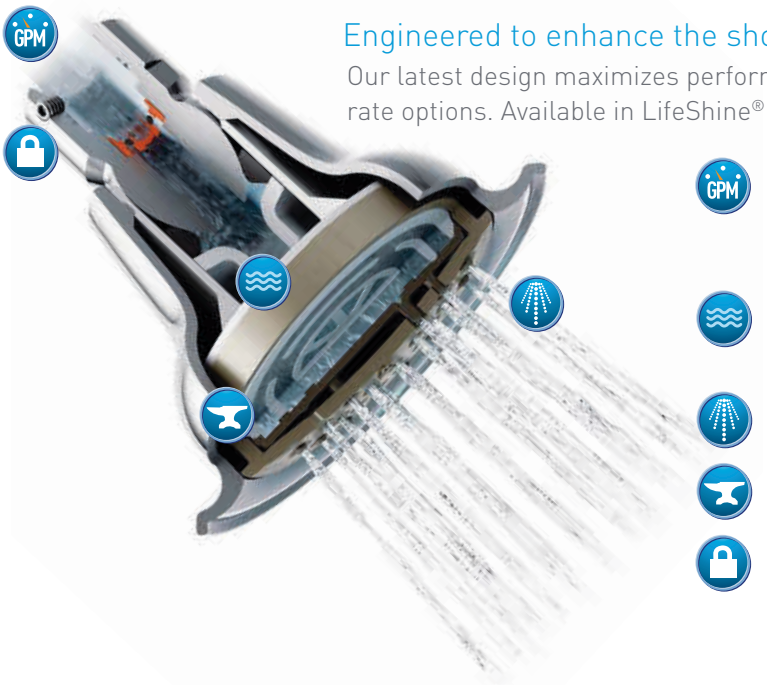

Engineered to enhance the shower experience.

Our latest design maximizes performance and durability while offering a range of flow rate options. Available in LifeShine® Classic Brushed Nickel and Chrome.

- Available in the standard flow rate—2.5 gpm (9.5 lpm)—as well as WaterSense®-certified flow rates of 1.5 gpm (5.7 lpm) and 1.75 gpm (6.6 lpm).
- Water flows through an engineered-polymer channel for instant, consistent flow.
- Conserves water without sacrificing performance.
- All-metal design, ideal for heavy-use applications.
- Set screw locks the showerhead to the arm for antitheft protection.

NEW! MODERN POSI-TEMP® PRESSURE-BALANCING TUB/SHOWER SYSTEM



Model No.	Description	Wt. Ea. Lbs.	Case Qty.	List Price
T9343	Posi-Temp® tub/shower system trim kit only **Valve not included** **Pair with a brass Posi-Temp® rough-in valve* (choose from connection options found on pages 68–70)** **Also requires a 3360 three-function transfer valve found on page 70** 2.5 gpm (9.5 lpm) max. 30" slide bar†	9.8	1	478.30
T9343EP15	1.5 gpm (5.7 lpm) max.	9.8	1	478.30

Classic Brushed Nickel available on select models ending in **CBN**.

*The brass Posi-Temp and Moentrol® valves meet ASSE 1016 compliance requirements for controlling temperature fluctuations when paired with Moen Commercial showerheads and handshowers with flow rates as low as 1.5 gpm (5.7 lpm).

† Slide bar is not a grab bar. Not to be used as support.

ADA compliant (excluding holders, slide bars and diverting tub spout)

BAA compliant WaterSense® Water-saving

NEW! MODERN POSI-TEMP® PRESSURE-BALANCING TUB/SHOWER SYSTEM WITH SLIDE BAR/GRAB BAR



Model No.	Description	Wt. Ea. Lbs.	Case Qty.	List Price
T9343GBM25	Posi-Temp® tub/shower system trim kit only **Valve not included** **Pair with a brass Posi-Temp® rough-in valve* (choose from connection options found on pages 68–70)** **Also requires a 3360 three-function transfer valve found on page 70** 2.5 gpm (9.5 lpm) max. **24" slide bar/grab bar**	10.5	1	526.15
T9343GBM15	1.5 gpm (5.7 lpm) max.	10.5	1	526.15

POSI-TEMP® PRESSURE-BALANCING TUB/SHOWER SYSTEM



Chrome

Classic Brushed Nickel

Model No.	Description	Wt. Ea. Lbs.	Case Qty.	List Price
8343*	**Includes the brass Posi-Temp® rough-in valve 8371HD with ½" CC connections, integral stops and 3360 three-function transfer valve found on page 70** No volume control Adjustable temperature limit stop Vandal-resistant head, arm and flange Handshower with non-positive pause function 2.5 gpm (9.5 lpm) max. 69" double swivel hose 30" slide bar† Tub filler spout Integral double check valves in handshower Drop ell	11.9	1	637.60
T8343	Posi-Temp® tub/shower system trim kit only **Valve not included** **Pair with a brass Posi-Temp® rough-in valve* (choose from connection options found on pages 68–70)** **Also requires a 3360 three-function transfer valve found on page 70** 2.5 gpm (9.5 lpm) max.	8.5	1	341.15
T8343CBN		8.5	1	501.55
T8343EP15	1.5 gpm (5.7 lpm) max.	8.5	1	341.15
T8343EP15CBN		8.5	1	501.55
T8343NH	Showerhead not included Vandal-resistant arm and flange	8.5	1	333.40
T8343NHCBN		8.5	1	459.10

NEW! MODERN POSI-TEMP® PRESSURE-BALANCING SHOWER SYSTEM

	Model No.	Description	Wt. Ea. Lbs.	Case Qty.	List Price
	T9342	Posi-Temp® shower system trim kit only **Valve not included** **Pair with a brass Posi-Temp® rough-in valve* (choose from connection options found on pages 68–70)** **Also requires a 3360 three-function transfer valve found on page 70** 2.5 gpm (9.5 lpm) max. 30" slide bar†	8.7	1	452.65
	T9342EP15	1.5 gpm (5.7 lpm) max.	8.7	1	452.65

NEW! MODERN POSI-TEMP® PRESSURE-BALANCING SHOWER SYSTEM WITH SLIDE BAR/GRAB BAR

	Model No.	Description	Wt. Ea. Lbs.	Case Qty.	List Price
	T9342GBM25	Posi-Temp® shower system trim kit only **Valve not included** **Pair with a brass Posi-Temp® rough-in valve* (choose from connection options found on pages 68–70)** **Also requires a 3360 three-function transfer valve found on page 70** 2.5 gpm (9.5 lpm) max **24" slide bar/grab bar**	9.4	1	497.90
	T9342GBM15	1.5 gpm (5.7 lpm) max.	9.4	1	497.90

Classic Brushed Nickel available on select models ending in **CBN**.

*The brass Posi-Temp and Moentrol® valves meet ASSE 1016 compliance requirements for controlling temperature fluctuations when paired with Moen Commercial showerheads and handshowers with flow rates as low as 1.5 gpm (5.7 lpm).

† Slide bar is not a grab bar. Not to be used as support.

ADA compliant (excluding holders, slide bars and diverting tub spout)

BAA compliant WaterSense® Water-saving

POSI-TEMP® PRESSURE-BALANCING SHOWER SYSTEM

Model No.	Description	Wt. Ea. Lbs.	Case Qty.	List Price
8342*	**Includes the brass Posi-Temp® rough-in valve 8371HD with ½" CC connections, integral stops and 3360 three-function transfer valve** No volume control Adjustable temperature limit stop Vandal-resistant showerhead, arm and flange Handshower with non-positive pause function 2.5 gpm (9.5 lpm) max. 69" double swivel hose 30" slide bar† Integral double check valves in handshower Drop ell	11.9	1	620.80
8342EP15*	1.5 gpm (5.7 lpm) max.	12.2	1	620.80
T8342	Posi-Temp® shower	8.1	1	322.85
T8342CBN	system trim kit only	8.1	1	474.60
	Valve not included **Pair with a brass Posi-Temp® rough-in valve* (choose from connection options found on pages 68–70)** **Also requires a 3360 three-function transfer valve found on page 70** 2.5 gpm (9.5 lpm) max.			
T8342EP15	1.5 gpm (5.7 lpm) max.	8.3	1	322.85
T8342EP15CBN		8.1	1	474.60
T8342NH	Showerhead not included	8.1	1	315.05
T8342NHCBN	Vandal-resistant arm and flange	8.1	1	432.15

Chrome Classic Brushed Nickel

POSI-TEMP® PRESSURE-BALANCING TUB/SHOWER SYSTEM

Model No.	Description	Wt. Ea. Lbs.	Case Qty.	List Price
8341*	**Includes the brass Posi-Temp® rough-in valve 8371HD with ½" CC connections and integral stops and 3360 three-function transfer valve** No volume control Adjustable temperature limit stop Handshower with non-positive pause function 2.5 gpm (9.5 lpm) max. 69" double swivel hose 30" slide bar† Tub filler spout Integral double check valves in handshower Drop ell	11.7	1	615.55
T8341	Posi-Temp® tub/shower system trim kit only	7.8	1	317.15
	Valve not included **Pair with a brass Posi-Temp® rough-in valve* (choose from connection options found on pages 68–70)** **Also requires a 3360 three-function transfer valve found on page 70** 2.5 gpm (9.5 lpm) max			

Classic Brushed Nickel available on select models ending in **CBN**.

ADA compliant (excluding holders, slide bars and diverting tub spout)
BAA compliant WaterSense® Water-saving

NEW! MODERN POSI-TEMP® PRESSURE-BALANCING HANDSHOWER SYSTEM



Model No.	Description	Wt. Ea. Lbs.	Case Qty.	List Price
T9346	Posi-Temp® shower system trim kit only **Valve not included** **Pair with a brass Posi-Temp® rough-in valve* (choose from connection options found on pages 68–70)** 2.5 gpm (9.5 lpm) max. 30" slide bar†	7.8	4	398.75
T9346EP15	1.5 gpm (5.7 lpm) max.	7.8	4	398.75

NEW! MODERN POSI-TEMP® PRESSURE-BALANCING HANDSHOWER SYSTEM WITH SLIDE BAR/GRAB BAR



Model No.	Description	Wt. Ea. Lbs.	Case Qty.	List Price
T9346GBM25	Posi-Temp® shower system trim kit only **Valve not included** **Pair with a brass Posi-Temp® rough-in valve* (choose from connection options found on pages 68–70)** 2.5 gpm (9.5 lpm) max. **24" slide bar/grab bar**	8.4	3	438.65
T9346GBM15	1.5 gpm (5.7 lpm) max.	8.4	3	438.65

POSI-TEMP® PRESSURE-BALANCING HANDSHOWER SYSTEM




Chrome


Classic Brushed Nickel

Model No.	Description	Wt. Ea. Lbs.	Case Qty.	List Price
8346*	**Includes the brass Posi-Temp® rough-in valve 8371HD with ½" CC connections and integral stops** No volume control Adjustable temperature limit stop Handshower with non-positive pause function 2.5 gpm (9.5 lpm) max. 69" double swivel hose 30" slide bar† Integral double check valves in handshower Drop ell	8.3	4	440.75
8346EP15*	1.5 gpm (5.7 lpm) max.	8.1	4	440.75
T8346	Posi-Temp® shower system trim kit only **Valve not included** **Pair with a brass Posi-Temp® rough-in valve* (choose from connection options found on pages 68–70)** 2.5 gpm (9.5 lpm) max.	6.9	4	297.95
T8346CBN		6.9	4	422.50
T8346EP15	1.5 gpm (5.7 lpm) max.	6.7	4	297.95
T8346EP15CBN		6.9	4	422.50

*The brass Posi-Temp and Moentrol® valves meet ASSE 1016 compliance requirements for controlling temperature fluctuations when paired with Moen Commercial showerheads and handshowers with flow rates as low as 1.5 gpm (5.7 lpm).

† Slide bar is not a grab bar. Not to be used as support.

NEW! MODERN POSI-TEMP® PRESSURE-BALANCING TUB/SHOWER

Model No.	Description	Wt. Ea. Lbs.	Case Qty.	List Price
T9389	Single-handle Posi-Temp® tub/shower system trim kit only **Valve not included** **Pair with a brass Posi-Temp® rough-in valve* (choose from connection options found on pages 68–70)** 2.5 gpm (9.5 lpm) max.	3.9	3	152.00
T9389EP15	1.5 gpm (5.7 lpm) max.	3.9	3	152.00



POSI-TEMP® PRESSURE-BALANCING TUB/SHOWER

Model No.	Description	Wt. Ea. Lbs.	Case Qty.	List Price
8389*	**Includes the brass Posi-Temp® rough-in valve 8371HD with ½" CC connections and integral stops** No volume control Vandal-resistant showerhead, arm and flange Adjustable temperature limit stop Diverter tub spout 2.5 gpm (9.5 lpm) max.	4.8	6	227.95
8389EP15*	1.5 gpm (5.7 lpm) max.	4.9	6	227.95
8339*	**Includes the brass Posi-Temp® rough-in valve 8370HD with ½" CC connections without stops** 2.5 gpm (9.5 lpm) max.	4.6	6	198.45
T8389 T8389CBN	Single-handle Posi-Temp® tub/shower system trim kit only **Valve not included** **Pair with a brass Posi-Temp® rough-in valve* (choose from connection options found on pages 68–70)** 2.5 gpm (9.5 lpm) max.	3.4 3.4	3 3	89.10 139.15
T8389EP15 T8389EP15CBN	1.5 gpm (5.7 lpm) max.	3.6 3.4	3 3	89.10 139.15
T8389NH T8389NHCBN	Showerhead not included Vandal-resistant arm and flange	3.4 3.4	3 3	74.40 108.95



Chrome Classic Brushed Nickel

Classic Brushed Nickel available on select models ending in **CBN**.

*The brass Posi-Temp and Moentrol® valves meet ASSE 1016 compliance requirements for controlling temperature fluctuations when paired with Moen Commercial showerheads and handshowers with flow rates as low as 1.5 gpm (5.7 lpm).

† Slide bar is not a grab bar. Not to be used as support.

ADA compliant (excluding holders, slide bars and diverting tub spout)

BAA compliant WaterSense® Water-saving

NEW! MODERN POSI-TEMP® PRESSURE-BALANCING SHOWER

Model No.	Description	Wt. Ea. Lbs.	Case Qty.	List Price
T9375	Single-handle Posi-Temp® shower system trim kit only **Valve not included** **Pair with a brass Posi-Temp® rough-in valve* (choose from connection options found on pages 68–70)** 2.5 gpm (9.5 lpm) max.	2.8	3	119.45
T9375EP15	1.5 gpm (5.7 lpm) max.	2.8	3	119.45

POSI-TEMP® PRESSURE-BALANCING SHOWER

Model No.	Description	Wt. Ea. Lbs.	Case Qty.	List Price
8375*	**Includes the brass Posi-Temp® rough-in valve 8371HD with ½" CC connections and integral stops** No volume control Vandal-resistant showerhead, arm and flange Adjustable temperature limit stop 2.5 gpm (9.5 lpm) max.	3.8	12	199.60
8375EP15*	1.5 gpm (5.7 lpm) max.	4.0	12	199.60
8325*	**Includes the brass Posi-Temp® rough-in valve 8370HD with ½" CC connections without stops** 2.5 gpm (9.5 lpm) max.	3.9	12	161.70
T8375 T8375CBN	Single-handle Posi-Temp® shower system trim kit only **Valve not included** **Pair with a brass Posi-Temp® rough-in valve* (choose from connection options found on pages 68–70)** 2.5 gpm (9.5 lpm) max.	2.6 2.6	3 3	58.15 89.45
T8375EP15 T8375EP15CBN	1.5 gpm (5.7 lpm) max.	2.9 2.6	3 3	58.15 89.45
T8375NH T8375NHCBN	Showerhead not included Vandal-resistant arm and flange	2.6 2.6	3 3	41.20 68.90

Chrome

Classic Brushed Nickel

POSI-TEMP® PRESSURE-BALANCING HANDSHOWER SYSTEM

Model No.	Description	Wt. Ea. Lbs.	Case Qty.	List Price
8348*	**Includes the brass Posi-Temp® rough-in valve 8371HD with ½" CC connections and integral stops** No volume control Adjustable temperature limit stop Handshower with non-positive pause function 2.5 gpm (9.5 lpm) max. 69" double swivel hose Wall bracket Integral double check valves in handshower Drop ell	6.2	6	333.65
T8348	Posi-Temp® shower system trim kit only **Valve not included** **Pair with a brass Posi-Temp® rough-in valve* (choose from connection options found on pages 68–70)**	4.7	6	204.95

24" SLIDE BAR/GRAB BAR HANDSHOWER SYSTEM WITHOUT VALVE



Chrome



Classic Brushed Nickel

Model No.	Description	Wt. Ea. Lbs.	Case Qty.	List Price
52224GBM15	Handshower with non-positive shutoff 1.5 gpm (5.7 lpm) max. **1½" x 24" stainless steel ADA compliant slide bar/grab bar** 69" double swivel metal hose Integral double check valves in handshower Drop ell	5.0	3	230.00
52224GBM15CBN		5.0	3	471.55
52224GBM17	1.75 gpm (6.6 lpm) max.	5.0	3	230.00
52224GBM17CBN		5.0	3	471.55
52224GBM25	2.5 gpm (9.5 lpm) max.	5.0	3	230.00
52224GBM25CBN		5.0	3	471.55
52124GBM25	**1¼" x 24" stainless steel ADA compliant slide bar/grab bar** 2.5 gpm (9.5 lpm) max.	5.0	3	224.90
52124GBM25CBN		5.0	3	461.05
52224GBP25	**1½" x 24" stainless steel ADA compliant slide bar/grab bar** **60" plastic hose** 2.5 gpm (9.5 lpm) max.	4.3	3	199.40

36" SLIDE BAR/GRAB BAR HANDSHOWER SYSTEM WITHOUT VALVE



Chrome



Classic Brushed Nickel

Model No.	Description	Wt. Ea. Lbs.	Case Qty.	List Price
52236GBM15	Handshower with non-positive shutoff 1.5 gpm (5.7 lpm) max. **1½" x 36" stainless steel ADA compliant slide bar/grab bar** 69" double swivel metal hose Integral double check valves in handshower Drop ell	6.0	3	250.40
52236GBM15CBN		6.0	3	512.35
52236GBM17	1.75 gpm (6.6 lpm) max.	6.0	3	250.40
52236GBM17CBN		6.0	3	512.35
52236GBM25	2.5 gpm (9.5 lpm) max.	6.0	3	250.40
52236GBM25CBN		6.0	3	512.35
52136GBM25	**1¼" x 36" stainless steel ADA compliant slide bar/grab bar** 2.5 gpm (9.5 lpm) max	6.0	3	245.30
52136GBM25CBN		6.0	3	502.85
52236GBP25	**1½" x 36" stainless steel ADA compliant slide bar/grab bar** **60" plastic hose** 2.5 gpm (9.5 lpm) max.	5.7	3	219.80

Classic Brushed Nickel available on select models ending in **CBN**.

*The brass Posi-Temp and Moentrol® valves meet ASSE 1016 compliance requirements for controlling temperature fluctuations when paired with Moen Commercial showerheads and handshowers with flow rates as low as 1.5 gpm (5.7 lpm).

† Slide bar is not a grab bar. Not to be used as support.

ADA compliant (excluding holders, slide bars and diverting tub spout)

BAA compliant WaterSense® Water-saving

HANDSHOWER SYSTEM WITHOUT VALVE



Model No.	Description	Wt. Ea. Lbs.	Case Qty.	List Price
52710	Handshower with non-positive pause function 2.5 gpm (9.5 lpm) max. 69" double swivel hose 30" slide bar† Integral double check valves in handshower Drop ell	5.0	6	261.05
52710CBN		5.0	6	519.60
52710EP15	1.5 gpm (5.7 lpm) max.	5.3	6	261.05
52710EP15CBN		5.3	6	519.60
52715	**36" slide bar†** 2.5 gpm (9.5 lpm) max.	6.1	6	272.75

ENVI® THREE-FUNCTION HANDSHOWER SYSTEM WITHOUT VALVE



Model No.	Description	Wt. Ea. Lbs.	Case Qty.	List Price
52740EP17	Three-function handshower 1.75 gpm (6.6 lpm) max. 30" slide bar† 69" double swivel hose Integral double check valves in handshower Drop ell	5.3	6	260.50

HANDSHOWER SYSTEM WITHOUT VALVE



Model No.	Description	Wt. Ea. Lbs.	Case Qty.	List Price
52748EP15	Handshower with non-positive pause function 1.5 gpm (5.7 lpm) max. 69" double swivel hose Wall bracket Integral double check valves in handshower Drop ell	3.1	6	190.45

NEW! MODERN HANDSHOWER

	Model No.	Description	Wt. Ea. Lbs.	Case Qty.	List Price
	9349	Handshower with non-positive pause function Single-function spray pattern 2.5 gpm (9.5 lpm) max. Easy-clean nozzles Integral double check valves in handshower	0.6	6	104.00
	9349EP15	1.5 gpm (5.7 lpm) max.	0.6	6	104.00

HANDSHOWER

	Model No.	Description	Wt. Ea. Lbs.	Case Qty.	List Price
	8349 8349CBN	Handshower with non-positive pause function Single-function spray pattern 2.5 gpm (9.5 lpm) max. Easy-clean nozzles Integral double check valves in handshower	0.6 0.6	6 6	71.45 104.05
	8349EP15 8349EP15CBN	1.5 gpm (5.7 lpm) max.	0.6 0.6	6 6	71.45 104.05
	8349EP17 8349EP17CBN	1.75 gpm (6.6 lpm) max.	0.6 0.6	6 6	71.45 104.05

 Chrome

 Classic Brushed Nickel

SHOWER ARM AND FLANGE

	Model No.	Description	Wt. Ea. Lbs.	Case Qty.	List Price
	A705 A705CBN	All-metal shower arm and flange	0.4 0.4	12 12	50.10 75.15

 Chrome

 Classic Brushed Nickel

Classic Brushed Nickel available on select models ending in **CBN**.

ADA compliant (excluding holders, slide bars and diverting tub spouts)
WaterSense® Water-saving

NEW! MODERN SHOWERHEAD

Model No.	Description	Wt. Ea. Lbs.	Case Qty.	List Price
				
9263	Single-function spray pattern 2.5 gpm (9.5 lpm) max. ½" IPS connection Self-cleaning spray formers	1.0	12	70.65
9263EP15	1.5 gpm (5.7 lpm) max.	1.0	12	70.65

VANDAL-RESISTANT SHOWERHEAD

Model No.	Description	Wt. Ea. Lbs.	Case Qty.	List Price
  Chrome  Classic Brushed Nickel				
5263 5263CBN	Single-function spray pattern 2.5 gpm (9.5 lpm) max. ½" IPS connection Self-cleaning spray formers	2.0 2.0	12 12	50.40 91.95
5263EP15 5263EP15CBN	1.5 gpm (5.7 lpm) max.	2.0 2.0	12 12	50.40 91.95
5263EP17 5263EP17CBN	1.75 gpm (6.6 lpm) max.	2.0 2.0	12 12	50.40 91.95

VANDAL-RESISTANT SHOWERHEAD

Model No.	Description	Wt. Ea. Lbs.	Case Qty.	List Price
				
52716EP15	Single-function spray pattern 1.5 gpm (5.7 lpm) max. ½" IPS connection Self-cleaning spray formers	2.0	20	66.30

VANDAL-RESISTANT SHOWERHEAD

Model No.	Description	Wt. Ea. Lbs.	Case Qty.	List Price
				
8290	Single-function spray pattern 2.5 gpm (9.5 lpm) max. ½" IPS connection Adjustable spray angle Mounting hardware included	1.9	12	113.00
8290EP15	1.5 gpm (5.7 lpm) max.	1.8	12	108.65

VANDAL-RESISTANT SHOWERHEAD

Model No.	Description	Wt. Ea. Lbs.	Case Qty.	List Price
				
8292	Single-function spray pattern 2.5 gpm (9.5 lpm) max. ½" IPS connection Adjustable spray angle Extended spray nozzle Mounting hardware included	4.0	12	117.90

NEW! MODERN POSI-TEMP® PRESSURE-BALANCING VALVE CONTROL

	Model No.	Description	Wt. Ea. Lbs.	Case Qty.	List Price
	T9370	Single-handle trim kit only **Valve not included** **Pair with a brass Posi-Temp® rough-in valve (choose from connection options found on pages 68–70)**	1.6	3	95.45

POSI-TEMP® PRESSURE-BALANCING VALVE CONTROL

	Model No.	Description	Wt. Ea. Lbs.	Case Qty.	List Price
	8370*	**Includes the brass Posi-Temp® rough-in valve 8371HD with ½" CC connections and integral stops** No volume control Adjustable temperature limit stop *Chrome finish*	2.7	12	177.15
	8320*	**Includes the brass Posi-Temp® rough-in valve 8370HD with ½" CC connections without stops**	2.8	12	148.05
 Chrome  Classic Brushed Nickel	T8370 T8370CBN	Single-handle trim kit only **Valve not included** **Pair with a brass Posi-Temp® rough-in valve (choose from connection options found on pages 68–70)**	1.5 1.4	3 3	33.65 61.50

NEW! MODERN THREE-FUNCTION TRANSFER VALVE CONTROL

	Model No.	Description	Wt. Ea. Lbs.	Case Qty.	List Price
	T9360	Three-function transfer valve trim kit only **Valve not included** **Pair with the 3360 three-function transfer valve found on page 70**	1.4	3	122.15

Classic Brushed Nickel available on select models ending in **CBN**.

*The brass Posi-Temp and Moentrol® valves meet ASSE 1016 compliance requirements for controlling temperature fluctuations when paired with Moen Commercial showerheads and handshowers with flow rates as low as 1.5 gpm (5.7 lpm).

**Moen Accessories part numbers are included for reference purposes only.
Moen Accessories CANNOT be combined with Moen faucet parts on a purchase order.

ADA compliant (excluding holders, slide bars and diverting tub spout) BAA compliant

THREE-FUNCTION TRANSFER VALVE CONTROL

Model No.	Description	Wt. Ea. Lbs.	Case Qty.	List Price
8360	**Includes the 3360 three-function transfer valve with ½" CC connections** Valve operates three distinct functions, but can be plumbed for two distinct functions	3.9	6	217.95
T8360	Three-function transfer valve trim kit only **Valve not included** **Pair with the 3360 three-function transfer valve found on page 70**	1.3	3	43.05
T8360CBN	Three-function transfer valve trim kit only **Valve not included** **Pair with the 3360 three-function transfer valve found on page 70**	1.4	3	78.65




Chrome


Classic Brushed Nickel

MOENTROL® PRESSURE-BALANCING VALVE CONTROL

Model No.	Description	Wt. Ea. Lbs.	Case Qty.	List Price
8350*	**Includes the Moentrol® valve** ½" CC connections Volume control Adjustable temperature limit stop Push/Pull operation	4.3	6	233.50
T8350	Single-handle trim kit only **Valve not included** **Pair with a 3570 or 3520 Moentrol® valve***	1.4	3	59.40
T8350CBN	Single-handle trim kit only **Valve not included** **Pair with a 3570 or 3520 Moentrol® valve***	1.4	3	107.50





Chrome


Classic Brushed Nickel

TUB/SHOWER ACCESSORIES

Part Number	Finish	Description	List Price
15856	Chrome	Diverter tub spout, ½" slip fit, vandal-resistant	56.90
15856CBN	Classic Brushed Nickel		82.80
100686	Chrome	Slide bar swivel bracket for handshower	47.45
100686CBN	Classic Brushed Nickel		69.95
101629	Chrome	30" adjustable slide bar with attaching hardware (This bar is not a grab bar. Not to be used for support.)	131.00
101629CBN	Classic Brushed Nickel		190.75
104414	Chrome	Wall-mounted bracket for handshower	48.00
52711	—	Slide bar/Grab bar bracket-1½" diameter	47.30
52714	—	Slide bar/Grab bar bracket-1¼" diameter	47.30
SMA1000CH**	—	SecureMount™ anchors, 1 pair, for use with bedpan washer wallmount flange	29.40
A725	Chrome	Drop ell	45.45
A725CBN	Classic Brushed Nickel		66.55
A726	Chrome	69" metal hose (vacuum breaker sold separately)	86.95
A723	Chrome	59" plastic hose (vacuum breaker sold separately)	27.35
A780	Chrome	80" metal hose (vacuum breaker sold separately)	102.50
52703	Chrome	Optional vacuum breaker for handshower ½" IPS connections	63.05
A714ST	Classic Brushed Nickel	Optional vacuum breaker for handshower ½" IPS connections	52.90

M•DURA™ Heavy-Duty Tub/Shower Valves

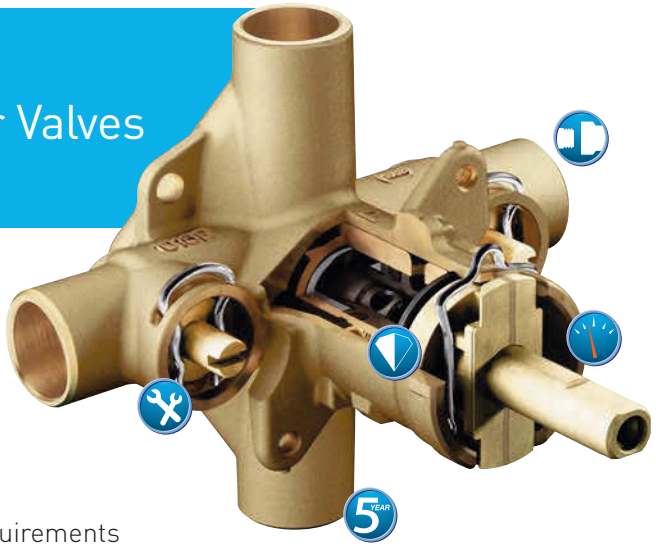

Faster, Easier Maintenance: Integral Stops
Shut-off water supply at the valve for quick and easy maintenance.

Safe, Consistent Operation:
Graphite Composite Pressure-Balancing Design
Posi-Temp® valves meet ASSE 1016 compliance requirements for controlling temperature fluctuations when paired with Moen Commercial showerheads and handshowers with flow rates as low as 1.5 gpm (5.7 lpm).

Superior Durability: 1222HD Brass Posi-Temp Cartridge
The heavy-duty brass 1222HD cartridge features superior durability, boasting exceptional strength and resistance to heat.

Installation Flexibility: Inlet Connection Options
For faster, easer install, choose from CC, IPS, PEX, CPVC and PEX expansion inlet connections.



CC | IPS | PEX | CPVC | PEX Expansion

Worry-Free Quality:
Best-in-Class Five-Year Limited Warranty

BRASS POSI-TEMP® CARTRIDGE

	Model No.	Description	Wt. Ea. Lbs.	Case Qty.	List Price
	1222HD*	Single-handle replacement cartridge Graphite composite pressure-balancing spool design	0.44	18	91.95

BRASS POSI-TEMP® ROUGH-IN VALVE

Order your valve to match your supply lines for quick, hassle-free installation.
Choose from CC, IPS, PEX, CPVC and PEX expansion inlet connection options.

	Model No.	Description	Wt. Ea. Lbs.	Case Qty.	List Price
	8370HD*	M•PACT® Common Valve System **½" CC connections without integral stops** 4-port cycling valve Adjustable temperature limit stop Graphite composite pressure-balancing spool design	1.7	6	124.85

BRASS POSI-TEMP® ROUGH-IN VALVE

	Model No.	Description	Wt. Ea. Lbs.	Case Qty.	List Price
	8371HD*	M•PACT® Common Valve System **½" CC connections with integral stops** 4-port cycling valve Adjustable temperature limit stop Graphite composite pressure-balancing spool design	1.9	6	150.30

BRASS POSI-TEMP® ROUGH-IN VALVE

	Model No.	Description	Wt. Ea. Lbs.	Case Qty.	List Price
	8372HD*	M•PACT® Common Valve System **½" IPS connections with integral stops** 4-port cycling valve Adjustable temperature limit stop Graphite composite pressure-balancing spool design	2.2	6	150.30

BRASS POSI-TEMP® ROUGH-IN VALVE

	Model No.	Description	Wt. Ea. Lbs.	Case Qty.	List Price
	8373HD*	M•PACT® Common Valve System **½" PEX connections with integral stops** 4-port cycling valve Adjustable temperature limit stop Graphite composite pressure-balancing spool design	2.0	6	150.30

*The brass Posi-Temp and Moentrol® valves meet ASSE 1016 compliance requirements for controlling temperature fluctuations when paired with Moen Commercial showerheads and handshowers with flow rates as low as 1.5 gpm (5.7 lpm).

BAA compliant

BRASS POSI-TEMP® ROUGH-IN VALVE

	Model No.	Description	Wt. Ea. Lbs.	Case Qty.	List Price
	8374HD*	M•PACT® Common Valve System **½" CPVC connections with integral stops** 4-port cycling valve Adjustable temperature limit stop Graphite composite pressure-balancing spool design	1.8	6	162.00

BRASS POSI-TEMP® ROUGH-IN VALVE

	Model No.	Description	Wt. Ea. Lbs.	Case Qty.	List Price
	8375HD*	M•PACT® Common Valve System **½" PEX expansion connections with integral stops** 4-port cycling valve Adjustable temperature limit stop Graphite composite pressure-balancing spool design	1.9	6	150.30

NOTE: PEX expansion valves are not to be used on PEX crimp ring assemblies.

THREE-FUNCTION TRANSFER VALVE

	Model No.	Description	Wt. Ea. Lbs.	Case Qty.	List Price
	3360	½" CC connections Three distinct functions Ceramic disk cartridge	2.6	6	183.80

HIGH-FLOW THERMOSTATIC MIXING VALVE FOR ROMAN TUBS

	Model No.	Description	Wt. Ea. Lbs.	Case Qty.	List Price
	104465	½" FIP (⅜" compression adapters) Listed to ASSE Standard 1070 Max. flow rate at 45 psi=10 gpm Roman tub application	3.2	12	136.55

*The brass Posi-Temp and Moentrol® valves meet ASSE 1016 compliance requirements for controlling temperature fluctuations when paired with Moen Commercial showerheads and handshowers with flow rates as low as 1.5 gpm (5.7 lpm).

BAA compliant


H
C


M•DURA™ Stainless Steel Sinks





- Popular kitchen and pantry sizes to fit most applications
- Durable 18- and 20-gauge stainless steel
- Exclusive SoundSHIELD™ sound-deadening system

The following guidelines will assist you in ordering the items needed.

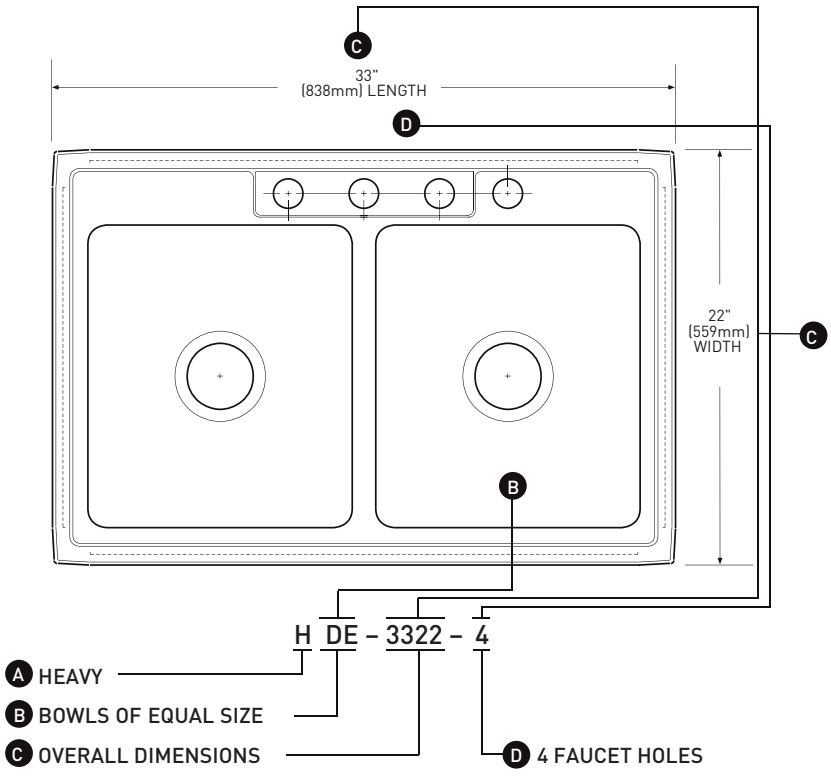

A Prefix:

The first letter of the prefix designates the type of sink.
H - Heavy – **18 gauge, 301 stainless**
C - Commercial – **20 gauge, 301 stainless**

B Additional letters:

Additional letters in the prefix represent the following:
DE – bowls of equal size
D – deep bowl
DEDL – extra-deep bowl on left
DEDR – extra-deep bowl on right

C Overall dimensions:

The overall dimensions of the sink are indicated by four numbers following the prefix. The first two numbers signify the length—from left to right. The last two numbers signify the width—from front to back.

D Faucet holes:

The third section of the model number represents the number of holes on the ledge.

STAINLESS STEEL SINK

	Model No.	Description	Wt. Ea. Lbs.	List Price
	22106	H-2522-3 1-21" x 16" x 8" 25" x 22" 3-hole 18 ga., 301 stainless	15.6	470.90

STAINLESS STEEL SINK

	Model No.	Description	Wt. Ea. Lbs.	List Price
	22125	HD-2522-3 1-21" x 16" x 10" 25" x 22" 3-hole 18 ga., 301 stainless	17.2	562.15

STAINLESS STEEL SINK

	Model No.	Description	Wt. Ea. Lbs.	List Price
	22121	HDED-3322-4 2-14" x 16" x 11" 33" x 22" 4-hole 18 ga., 301 stainless	23.8	771.25

STAINLESS STEEL SINK

	Model No.	Description	Wt. Ea. Lbs.	List Price
	22122	HDEDR-3322-4 1-14" x 16" x 7¼" 1-14" x 16" x 11" 33" x 22" 4-hole 18 ga., 301 stainless	22.2	674.90

STAINLESS STEEL SINK

	Model No.	Description	Wt. Ea. Lbs.	List Price
	22123	HDEDL-3322-4 1-14" x 16" x 11" 1-14" x 16" x 7¼" 33" x 22" 4-hole 18 ga., 301 stainless	23.0	674.90

STAINLESS STEEL SINK

	Model No.	Description	Wt. Ea. Lbs.	List Price
	22124	H-1618 1-14" x 16" x 11" 16" x 18" 18 ga., 301 stainless	11.4	443.25

STAINLESS STEEL SINK

	Model No.	Description	Wt. Ea. Lbs.	List Price
	22119	C-1515-2 1-12" x 10" x 5½" 15" x 15" 2-hole 20 ga., 301 stainless Includes Sealtite strainer with drop-in basket	7.0	108.05

STAINLESS STEEL SINK

	Model No.	Description	Wt. Ea. Lbs.	List Price
	22127	C-1722-3 1-14" x 16" x 7" 17" x 22" 3-hole 20 ga., 301 stainless	10.2	240.30

STAINLESS STEEL SINK

	Model No.	Description	Wt. Ea. Lbs.	List Price
	22128	C-2417-2 1-14" x 16" x 7" Classroom sink 24" x 17" 2-hole 20 ga., 301 stainless	11.1	297.70
	22132	C-2417-2 1-14" x 16" x 5½"	10.2	286.40

STAINLESS STEEL SINK

	Model No.	Description	Wt. Ea. Lbs.	List Price
	22130	C-2522-4HL 1-21" x 16" x 5½" Left rear drain 25" x 22" 4-hole 20 ga., 301 stainless	12.0	270.00
	22131	C-2522-4HR Right rear drain	7.6	270.00

*ADA installation compatible

STAINLESS STEEL SINK

	Model No.	Description	Wt. Ea. Lbs.	List Price
	22129	CDE-3322-4 2-14" x 16" x 5½" Drain in rear 33" x 22" 4-hole 20 ga., 301 stainless	16.3	339.70

*ADA installation compatible

BAA compliant

AERATOR



Model #	Finish	Flow Rate	Style	Type	Dimensions	List Price
52610	Chrome	1.5 gpm max. (5.7 lpm)	Vandal-Resistant	Male Thread	15/16"-27	16.80
52614	Chrome	2.2 gpm max. (8.3 lpm)	Vandal-Resistant	Male Thread	15/16"-27	16.80
52611	Chrome	1.5 gpm max. (5.7 lpm)	Vandal-Resistant	Female Thread	55/64"-27	16.80
52615	Chrome	2.2 gpm max. (8.3 lpm)	Vandal-Resistant	Female Thread	55/64"-27	16.80

LAMINAR FLOW



Model #	Finish	Flow Rate	Style	Type	Dimensions	List Price
52608	Chrome	1.5 gpm max. (5.7 lpm)	Standard	Male Thread	15/16"-27	15.60
52612	Chrome	2.2 gpm max. (8.3 lpm)	Standard	Male Thread	15/16"-27	15.60
52609	Chrome	1.5 gpm max. (5.7 lpm)	Standard	Female Thread	55/64"-27	15.60
52613	Chrome	2.2 gpm max. (8.3 lpm)	Standard	Female Thread	55/64"-27	15.60

ROSETTA SPRAY



Model #	Finish	Flow Rate	Style	Type	Dimensions	List Price
52600	Chrome	0.5 gpm max. (1.9 lpm)	Standard	Male Thread	15/16"-27	15.60
52601	Chrome	0.5 gpm max. (1.9 lpm)	Standard	Female Thread	55/64"-27	15.60
52602	Chrome	0.5 gpm max. (1.9 lpm).	Vandal-Resistant	Male Thread	15/16"-27	16.80
52603	Chrome	0.5 gpm max. (1.9 lpm)	Vandal-Resistant	Female Thread	55/64"-27	16.80
52620	Chrome serrated nozzle end trim			Female Thread	55/64"-27	24.55

Part Number	Finish		Product Description	List Price
A705	Chrome		Shower Flange and Shower Arm	50.10
A705CBN	Classic Brushed Nickel		Shower Flange and Shower Arm	75.15
A723	Chrome		59" Plastic Hose (vacuum breaker sold separately)	27.35
12523	—		Stem Bushing Support, 14834 and 14848 Wrist-Blade Handles	2.25
12828	Chrome		Kitchen Spout, 12" Long	117.65
14690	—		Heavy-Duty Ceramic Cartridge 8100 Series Prior to 2005	50.20
14695	—		Heavy-Duty Ceramic Cartridge 8100 Series Prior to 2005 (widespread)	50.20
14750	Chrome		1¼" Grid Strainer Waste	24.55
14834	Chrome		Wrist-Blade Handle, Hot Sani-Stream Models	54.70
14834CBN	Classic Brushed Nickel		Wrist-Blade Handle Kit – Hot, Classic Brushed Nickel	79.60
14838	Chrome		Wrist-Blade Handle, Cold Sani-Stream Models	54.70
14838CBN	Classic Brushed Nickel		Wrist-Blade Handle Kit – Cold, Classic Brushed Nickel	79.60
15856	Chrome		Diverter Spout, Slip Fit, Vandal-Resistant	56.90
15856CBN	Classic Brushed Nickel		Diverter Spout, Slip Fit, Vandal-Resistant	82.80
16000	Chrome		Handle Kit for Metering Faucet	60.40
16264	Chrome		High-Arch Spout for 8940, 8796 and 8799	109.30
16350	Chrome		Aerator 0.5 gpm Vandal-Resistant, Male Thread	16.80
16352	—		Plastic Replacement Cartridge for 8884, 8886 and 8889	98.60
52000	—		2-Handle Brass Shell Ceramic Disc Cartridge – Hot	14.55
52001	—		2-Handle Brass Shell Ceramic Disc Cartridge – Cold	14.55
52002	—		Cartridge Nut, O-Ring, Cover 8200 Series	20.15
52003	Chrome		Widespread Escutcheon 8200 Series	33.50
52005	—		Torx Head Wrench 8200 Series	4.40
52006	—		Aerator 2.2 gpm Insert 8200 Series	10.05
52007	Chrome		Laminar Flow 2.2 gpm Insert 8200 Series	12.25
52008	Chrome		Lever Handle, Cold, 8200 Series	22.35
52009	Chrome		Lever Handle, Hot, 8200 Series	22.35
52010	Chrome		Wrist-Blade Handle, Cold, 8200 Series	44.60
52011	Chrome		Wrist-Blade Handle, Hot, 8200 Series	44.60
52012	Chrome		Vacuum Breaker Service Kit	15.60
52015	Chrome		Handle Kits for Laboratory Faucets (hot or cold)	41.30
52016	Chrome		Aerator 0.5 gpm Insert 8200 Series	18.80
52016F03	—		0.35 gpm max. (1.3 lpm) Recessed Vandal-Resistant Rosetta Spray	17.30
52016F05	—		0.5 gpm max. (1.9 lpm) Recessed Vandal-Resistant Rosetta Spray	17.30
52016F15	—		1.5 gpm max. (5.7 lpm) Recessed Vandal-Resistant Aerator	17.30
52016F22	—		2.2 gpm max. (8.3 lpm) Recessed Vandal-Resistant Aerator	17.30
52019	Chrome		Wallmount Connections Kit for 8124 (1 per)	59.10
52020	Chrome		Wallmount Connections Kit for 8230 (1 per)	59.10
52021	Chrome		Widespread Spout 8200 Series	102.60
52022	—		Set Screw for Widespread Spout Hub	1.70
52023	Chrome		Widespread Mounting Kit for 8200 Series	30.15
52024	—		Set Screw for Metering Handle	1.70
52025	—		Friction Washers for S Series Spout (2 per)	2.85
52028	—		Center Spout Hub for M•DURA™ Widespread Faucets	55.70
52618	Chrome		0.35 gpm max. (1.3 lpm) Vandal-Resistant Rosetta Spray	12.55
52650	Chrome		Laminar Flow Spout, Flow Control in Base, 2.0 gpm, Fits S-Series Spouts with Spout Ring	26.80
52652	Chrome		Laminar Flow Spout, Flow Control in Base, 1.5 gpm, Fits S-Series Spouts with Spout Ring	26.80
52653	Chrome		Laminar Flow Spout, Flow Control in Base, 1.0 gpm, Fits S-Series Spouts with Spout Ring	26.80
52655	Chrome		Laminar Flow Spout, Flow Control in Base, 0.5 gpm, Fits S-series Spouts without Spout Ring	16.80
52703	Chrome		Optional Vacuum Breaker for Handshowers, ½" IPS Connections	63.05
52706	Chrome		Shower Arm Diverter	62.25
52711	—		Slide Bar/Grab Bar Bracket	47.30
59001	Chrome	*NEW!*	Modern 1-Handle Kit	34.65
59002	—	*NEW!*	Modern 1-Handle Retaining Nut and Cartridge	28.40
59005	—	*NEW!*	Aerator Key for Cache PCA JR	4.10
59006	Chrome	*NEW!*	Waste Assembly with Modern Lift Rod	58.50
59007	—	*NEW!*	Modern 1-Handle Mounting Hardware	22.98

Part Number	Finish		Product Description	List Price
59008	Chrome	*NEW!*	Modern Widespread Handle Kit	35.60
59009	—	*NEW!*	Modern Widespread Red/Blue Color Rings	5.70
59010	Chrome	*NEW!*	Modern Widespread Handle Hub Kit	68.95
59011	—	*NEW!*	Widespread Spout/Handle Mounting Kit	24.00
59012	Chrome	*NEW!*	Modern Widespread Spout, Diverting, 0.5 gpm	162.70
59013	Chrome	*NEW!*	Modern Widespread Spout, Diverting, 1.5 gpm	162.70
59014	Chrome	*NEW!*	Modern Widespread Spout, Nondiverting, 0.5 gpm	163.80
59015	Chrome	*NEW!*	Modern Widespread Spout, Nondiverting, 1.5 gpm	163.80
59016	Chrome	*NEW!*	Modern Shower Escutcheon	29.15
59017	Chrome	*NEW!*	Modern Shower Handle Lever Kit	44.55
59018	Chrome	*NEW!*	Modern 3-Function Escutcheon	49.50
59019	Chrome	*NEW!*	Modern 3-Function Handle Repair Kit	56.20
59021	Chrome	*NEW!*	Modern Tub Spout, Diverting	84.90
59022	Chrome	*NEW!*	Modern Tub Spout, Nondiverting	78.45
59023	Chrome	*NEW!*	Modern Tub Gate Kit15.35	15.35
92191	Chrome		Tri-Blade Replacement Handles (2 per)	50.15
93379	Chrome		Handle Cap with Color Indicators, All 1-Handle Lever Faucets	17.55
93380	Chrome		Lever Handle Kit, 1-Handle Kitchen, 4"	87.55
93385	Chrome		Lever Handle Kit, 1-Handle Lav, 2½"	85.05
93390	Chrome		Lever Handle Kit, 1-Handle Lav, 4"	85.05
93410	Chrome		Handle Kit with Insert, 1-Handle Tub/Shower	25.15
93415	Chrome		Easy Grip Handle Kit, 1-Handle Lav, Vandal-Proof	45.80
93426	Chrome		Easy Grip Handle Kit, 1-Handle Tub/Shower, Vandal-Proof	45.80
93455	Chrome		Escutcheon Screws, Torx for Posi-Temp® and Moentrol® 1-Handle Tub/Showers	10.05
93455CBN	Classic Brushed Nickel		Escutcheon Screws, Classic Brushed Nickel	11.95
99457	Chrome		4" Deckplate (for use with previous 8884 model)	26.20
99550	Chrome		Anti-Rotation Deckplate for 8161 and 8884	28.40
99551	Chrome		Anti-Rotation Deckplate for 8894	28.40
99559	Chrome	*NEW!*	Modern 4" Optional Deckplate	31.05
100078	—		Handle Screw Kit, Sani-Stream 3-Function Transfer Valve	19.50
100078CBN	Classic Brushed Nickel		Handle Screw Kit, Classic Brushed Nickel	10.30
100079	Chrome		Lever Handle Kit, 3-Function Transfer Valve Kit	32.95
100079CBN	Classic Brushed Nickel		Handle Repair Kit, Classic Brushed Nickel	47.95
100080	—		Mounting Sleeve, 3-Function Transfer Valve	45.80
100080CBN	Classic Brushed Nickel		Mounting Sleeve, Classic Brushed Nickel	66.65
100087	—		Shower Function Label, 3-Function Transfer Valve	7.30
100686	Chrome		Slide Bar Swivel for Handshower	47.45
100686CBN	Classic Brushed Nickel		Slide Bar Swivel for Handshower	69.95
101018	—		Temperature Indicators, 8889 Metering Faucet	4.10
101019	—		Temperature Indicators, 8884, 8886 Metering Faucets	3.40
101020	Chrome		Widespread Spout, 8889 Metering Faucet	75.25
101629	Chrome		Adjustable 30" Slide Bar with Attaching Hardware	131.00
101629CBN	Classic Brushed Nickel		Adjustable 30" Slide Bar with Attaching Hardware	190.75
101867	Chrome		Temperature Limit Stop Kit, 1-Handle Lav	12.05
101868	Chrome		Conversion Kit with Adjustable Temperature Limit Stop	59.70
104020	—		Manual Temperature Control Handle Kit 8307–08	21.75
104021	—		Solenoid Valve Repair Kit 8301–8304	48.25
104334	—		Control Module 8310 (1.6 gpf closet)	156.10
104400	—		In-Line Filter with Check Valve	53.00
104401	—		AC Power Adapter (up to 8 faucets/flush valves) 8301–8304/Flush Valve	99.25
104402	—		24" Power Cable Lead for 8301–8304	31.40
104403	—		Control Module 8312, 8314 (1.0 gpf urinal)	156.10
104404	—		Control Module 8305, 8307 (DC)	167.20
104405	—		Control Module 8306, 8308 (AC)	167.20
104406	—		AC Adapter for Flush Valves (powers 1 unit)	33.40
104408	—		AC Adapter, 75V, 3A for 8306–8308	99.25

Part Number	Finish	Product Description	List Price
104414	Chrome	Handshower Wall Bracket Kit	48.00
104424	Chrome	Mixing Valve, Includes Integral Check Valves	62.75
104425	Chrome	Mixing Tee, Includes Integral Check Valves	24.55
104426	Chrome	4" Deckplate for Models 8302, 8303	31.25
104427	—	AC Adapter, 110V, Armored (powers 1 unit) (8301–8304, all flush valves)	60.25
104428	Chrome	4" Deckplate with Mounting Hardware for 8305–8308	34.60
104429	Chrome	Gooseneck Spout 8303, 8304: 5¾" x 6" x 10¼"	39.80
104430	Chrome	Gooseneck Spout 8303, 8304: 5³⁄₁₆" x 9" x 13¼"	53.20
104431	Chrome	Gooseneck Spout 8303, 8304: 6" x 1½" x 4¾"	42.10
104432	Chrome	Gooseneck Spout 8303, 8304: 8" x 2¾" x 5¾"	43.15
104433	Chrome	Gooseneck Spout 8303, 8304: 8³⁄₁₆" x 6" x 11"	81.05
104434	—	Control Module for 8301–8304	267.00
104435	—	Flush Valve Solenoid Coil Kit	133.75
104437	—	Flush Valve Control Disk Valve	39.10
104438	—	Filter Screen (mesh)	8.15
104439	—	Solenoid/Housing Assembly	292.65
104440	—	Flush Valve Battery Holder (2/bag)	6.20
104441	—	Nylon Washer for Filter Housing	2.25
104443	—	Supply Rod for 8304	15.60
104444	—	Flexible Supply Line 8305–8308 (1/bag)	29.00
104446	—	Plug-In Power Adapter Single (with cable) 8306, 8308	57.40
104447	—	Hex Key Wrench 8305–8307	2.85
104448	Chrome	8" Deckplate with Mounting Kit for 8302, 8303, 8305–8308	45.80
104449	—	Vandal-Proof Screws with O-Ring for Flush Valve (12/bag)	35.15
104450	—	Solenoid Coil Kit 8305-8307	121.60
104451	—	Thermostatic Mixing Valve	173.00
104452	—	Control Module (1.28 gpf closet)	156.10
104453	Chrome	AC Tube and Wall Flange	55.70
104454	Chrome	AC Flush Valve Cap	90.35
104455	Chrome	DC Flush Valve Cap	79.20
104456	—	Sensor Eye Casing for 8301–8304	12.30
104457	—	O-Ring for Electronic Faucet Spout	2.40
104458	—	Split Washer for Electronic Spout	2.40
104459	—	Battery Holder for Electronic Faucet 8301–8304	6.20
104460	Chrome	Electronic Faucet Spout Nut	8.80
104461	Chrome	Manual Override Replacement Plug	29.35
104500	Chrome	2¼" Delany Supply (standard) Extension Nipple	35.70
104501	Chrome	1¾" Delany Supply Extension Nipple	31.25
104502	Chrome	2¾" Delany Supply Extension Nipple	43.50
104503	Chrome	3¼" Delany Supply Extension Nipple	48.00
104504	Chrome	3¾" Delany Supply Extension Nipple	53.50
104505	Chrome	4¼" Delany Supply Extension Nipple	59.10
104506	Chrome	2⅛" Sloan-Moen Style Supply Extension Nipple (standard)	31.25
104507	Chrome	2½" Sloan-Moen Style Supply Extension Nipple	34.60
104508	Chrome	3" Sloan-Moen Style Supply Extension Nipple	36.80
104509	Chrome	3½" Sloan-Moen Style Supply Extension Nipple	40.15
104510	Chrome	4" Sloan-Moen Style Supply Extension Nipple	44.60
104511	Chrome	4½" Sloan-Moen Style Supply Extension Nipple	48.00
104512	Chrome	5" Sloan-Moen Style Supply Extension Nipple	53.50
104513	Chrome	5½" Sloan-Moen Style Supply Extension Nipple	56.90
104514	Chrome	6" Sloan-Moen Style Supply Extension Nipple	61.35
104515	Chrome	1½" Closet Flush Tube – 24"	104.10
104516	Chrome	Split Ring Wall Support	71.20
104517	Chrome	Flush Valve Trap Primer	102.95
104518	Chrome	1" Sweat Kit, Flush Valve	30.15
104519	Chrome	1" Sweat Kit, Flush Valve 6" Long	42.40
104520	Chrome	Sensor Eye/Wires for Flush Valve	74.75

Part Number	Finish	Product Description	List Price
104521	Chrome	1" Angle Stop Valve Flush Valve	107.40
104522	Chrome	¾" Angle Stop Valve Flush Valve	107.40
104523	Chrome	Angle Stop Repair Kit	18.80
104524	Chrome	Flush Valve Manual Override Button	35.15
104525	Chrome	Vacuum Breaker Kit	17.55
104526	Chrome	Brass Valve Body Nut Flush Valve	23.45
104527	Chrome	O-Ring (Large) for Flush Valve Seat	5.35
104528	Chrome	1½" Brass Flush Valve Tube	41.00
104529	Chrome	1¼" Brass Flush Tube	39.85
104530	Chrome	¾" Brass Flush Tube	38.80
104531	Chrome	1½" Top Spud Assembly	41.00
104532	Chrome	1¼" Top Spud Assembly	38.80
104533	Chrome	¾" Top Spud Assembly	34.30
104534	Chrome	Aerator 1 .5 gpm for 8305–8308	17.30
104535	Chrome	Aerator 0.5 gpm for 8305–8308	17.30
104536	—	Plastic Flush Valve Cap Mount Bracket	17.80
104537	—	Flush Valve Solenoid Tips (10 per)	33.50
104538	Chrome	1¼" Urinal Tailpiece – 24"	104.80
104539	Chrome	Set Screw for 8305–8308	4.50
104540	Chrome	M•DURA™ 2¼" Delany (standard) Nipple	35.70
104541	Chrome	M•DURA™ 1¾" Delany Nipple	31.25
104542	Chrome	M•DURA™ 2¾" Delany Nipple	43.50
104543	Chrome	M•DURA™ 3¼" Delany Nipple	48.00
104544	Chrome	M•DURA™ 3¾" Delany Nipple	53.50
104545	Chrome	M•DURA™ 4¼" Delany Nipple	59.10
104546	Chrome	M•DURA™ 2⅛" Sloan (standard) Nipple	31.25
104547	Chrome	M•DURA™ 2½" Sloan Nipple	34.60
104548	Chrome	M•DURA™ 3" Sloan Nipple	36.80
104549	Chrome	M•DURA™ 3½" Sloan Nipple	40.15
104550	Chrome	M•DURA™ 4" Sloan Nipple	44.60
104551	Chrome	M•DURA™ 4½" Sloan Nipple	48.00
104552	Chrome	M•DURA™ 5" Sloan Nipple	53.50
104553	Chrome	M•DURA™ 5½" Sloan Nipple	56.90
104554	Chrome	M•DURA™ 6" Sloan Nipple	61.35
104555	Chrome	M•DURA™ 1" Angle Stop Flush Valve	107.40
104556	Chrome	M•DURA™ ¾" Angle Stop Flush Valve	107.40
104557	Chrome	M•DURA™ Angle Stop Repair Kit	18.80
104560	Chrome	1½" Offset Tailpiece	41.70
104561	Chrome	M•DURA™ Flush Valve Cap Assembly	58.90
104563	—	3.5 gpf (13.2 lpf) Piston	79.20
104564	—	1.6 gpf (6.0 lpf) Piston	79.20
104565	—	1.28 gpf (4.8 lpf) Piston	79.20
104566	—	1.0 gpf (3.8 lpf) Piston	79.20
104567	—	0.5 gpf (1.9 lpf) Piston	79.20
104568	—	0.125 gpf (0.5 lpf) Piston	79.20
104569	Chrome	M•DURA™ Flush Valve Handle Assembly	23.75
104570	Chrome	M•DURA™ Vacuum Breaker Assembly	17.55
104571	Chrome	M•DURA™ Flush Valve Body Nut	23.45
104572	Chrome	M•DURA™ Angle Stop Replacement Cap	6.10
104573	Chrome	M•DURA™ Flush Valve Wallmount Assembly	22.70
104574	Chrome	M•DURA™ Bedpan Washer Seal Kit	49.65
104575	Chrome	M•DURA™ Bedpan Washer Arm Assembly	49.65
104577	Chrome	M•DURA™ Bedpan Washer Spray Face	10.65
104578	—	1½" Flush Tube	44.80
104579	—	1¼" Flush Tube	48.65
104580	—	¾" Flush Tube	44.90
104581	—	1½" Top Spud Assembly	31.40

Part Number	Finish	Product Description	List Price
104582	—	1¼" Top Spud Assembly	28.55
104583	—	¾" Top Spud Assembly	24.55
104584	—	Urinal Tailpiece 24" x ¾"	73.10
104585	—	Flush Extension Tube – 24"	115.15
104588	—	1" Sweat Kit Flush Valve	26.40
104589	—	1" Sweat Kit Flush Valve – 6"	42.40
104590	—	M•DURA™ Cap Assembly 3.5 gpf	25.25
104591	—	M•DURA™ Cap Assembly 1.6 gpf	25.25
104592	—	M•DURA™ Cap Assembly 1.28 gpf	25.25
104593	—	M•DURA™ Cap Assembly 1.0 gpf	25.25
104594	—	M•DURA™ Cap Assembly .5 gpf	25.25
104595	—	M•DURA™ Cap Assembly 0.125 gpf	25.25
104597	—	M•DURA™ Flush Valve Tailpiece and Interior Cap Tool	16.80
104770	Chrome	Metal Drain Assembly with Round Knob Lift Rod	19.80
104775	Chrome	Metal Drain Assembly with Fluted Knob Lift Rod	21.75
104775BC	Brushed Chrome	Metal Drain Assembly with Fluted Knob Lift Rod	32.00
106321	—	Extension Kit, 3-Function Transfer Valve	99.25
109146	—	6' Sensor Eye and Cable	207.90
116715	Chrome	Spout Kit, 8948	32.35
121443	Chrome	Wrist-Blade Handle for Ceramic Disc, Cold 8100 Series	42.25
121444	Chrome	Wrist-Blade Handle for Ceramic Disc, Hot 8100 Series	42.25
121520	Chrome	Lever Handle for 8413, 8414, 8417 Series	21.15
121521	Chrome	Lever Handle for 8701	18.80
121549	—	1-Handle Ceramic Disc Cartridge – Models 8413 Series	21.75
121550	—	2-Handle Plastic Shell Ceramic Disc Cartridge – Hot	12.20
121551	—	2-Handle Plastic Shell Ceramic Disc Cartridge – Cold	12.20
121620	—	1-Handle Ceramic Disc Cartridge – Model 8701 (prior to 2010)	21.75
129900	Chrome	Lever Handle Extended Reach 8416, 8418	31.25
129901	Brushed Chrome	Lever Handle for 8414 Series	27.90
129902	Brushed Nickel	Lever Handle for 8414 Series	27.90
161380	Chrome	Moentrol® Escutcheon	34.75
163215	—	Fixed Spout Clip for S-Series Spouts	16.00
174066	—	Filter Screen for Filter Housing	5.20
174334	—	IR Sensor Bracket for 8551, 8551AC, 8552, 8552AC	178.80
174335	—	IR Sensor Bracket for 8553, 8553AC, 8554, 8554AC	178.80
174336	Chrome	Plug Button for 8552, 8552AC	17.70
174337	Chrome	Plug Button for 8554, 8554AC	17.70
840011	Chrome	3" Handle Kit	82.55
840011CBN	Classic Brushed Nickel	3" Handle Kit	123.85
840012	Chrome	4" Handle Kit	82.55
840012CBN	Classic Brushed Nickel	4" Handle Kit	123.85
840015F03	—	0.35 gpm max. (1.3 lpm) Recessed Vandal-Resistant Rosetta Spray	12.55
840015F05	—	0.5 gpm max. (1.9 lpm) Recessed Vandal-Resistant Rosetta Spray	12.55
840015F15	—	1.5 gpm max. (5.7 lpm) Recessed Vandal-Resistant Aerator	12.55
840015F22	—	2.2 gpm max. (8.3 lpm) Recessed Vandal-Resistant Aerator	12.55
870111	Chrome	Spout Assembly Kit	114.20
870112	Chrome	Optional Single-Mount Escutcheon	13.20
870113	Chrome	Optional Deckplate	44.40
870114	Chrome	9" Spout Assembly Kit	114.20
870115	Chrome	12" Spout Assembly Kit	117.50

Model No.	UPC	Page Number	Case Qty.	List Price
1222HD	0-26508 20760-4	68	18	91.95
3360	0-26508 22276-8	70	6	183.80
5263	0-26508 23721-2	65	12	50.40
5263CBN	0-26508 23722-9	65	12	91.95
5263EP15	0-26508 23723-6	65	12	50.40
5263EP15CBN	0-26508 23724-3	65	12	91.95
5263EP17	0-26508 23725-0	65	12	50.40
5263EP17CBN	0-26508 23726-7	65	12	91.95
8100	0-26508 02518-5	18	6	106.45
8103	0-26508 16230-9	18	6	163.65
8106	0-26508 16232-3	18	6	220.85
8110	0-26508 02519-2	18	6	185.25
8113	0-26508 16227-9	18	6	242.40
8116	0-26508 16231-6	18	6	299.65
8119	0-26508 16233-0	16	6	284.20
8121	0-26508 02520-8	16	6	230.55
8124	0-26508 02616-8	17	6	240.85
8125	0-26508 02618-2	15	6	174.95
8126	0-26508 16234-7	16	6	284.95
8137	0-26508 18547-6	15	6	229.50
8138	0-26508 19904-6	15	6	273.15
8161	0-26508 22771-8	10	6	138.70
8198	0-26508 14068-0	17	10	63.45
8199	0-26508 14069-7	17	10	46.15
8210	0-26508 15378-9	6	6	187.70
8210F03	0-26508 23542-3	6	6	187.70
8210F05	0-26508 23543-0	6	6	187.70
8210F15	0-26508 23637-6	6	6	187.70
8210SM	0-26508 23863-9	20	6	187.70
8210SMF15	0-26508 23864-6	20	6	187.70
8215	0-26508 16118-0	7	6	208.15
8215F03	0-26508 23544-7	7	6	208.15
8215F05	0-26508 23545-4	7	6	208.15
8215F15	0-26508 23638-3	7	6	208.15
8215SM	0-26508 23865-3	20	6	208.15
8215SMF15	0-26508 23866-0	20	6	208.15
8216	0-26508 01417-2	6	6	212.00
8218	0-26508 15512-7	6	6	205.90
8219	0-26508 16778-6	7	6	231.30
8220	0-26508 01596-4	7	3	294.05
8220F05	0-26508 23550-8	7	3	294.05
8223	0-26508 15541-7	7	3	326.30
8224	0-26508 15542-4	7	3	320.05
8225	0-26508 16243-9	10	6	305.25
8225SM	0-26508 23867-7	19	6	305.25
8225SMF15	0-26508 23868-4	19	6	305.25
8226	0-26508 15543-1	10	6	235.90
8227	0-26508 16225-5	10	6	286.70
8228	0-26508 16119-7	8	3	312.60
8228F03	0-26508 23551-5	8	3	312.60
8228F05	0-26508 23552-2	8	3	312.60
8228F15	0-26508 23639-0	8	3	312.60
8229	0-26508 16226-2	10	6	254.50
8230	0-26508 17217-9	17	3	195.35
8232	0-26508 19905-3	17	6	282.70
8239	0-26508 01597-1	8	3	344.85
8241	0-26508 18148-5	11	6	280.45
8242	0-26508 18548-3	11	6	328.85
8244	0-26508 18549-0	11	6	347.40
8248	0-26508 18108-9	12	6	299.00
8248SM	0-26508 23869-1	19	6	299.00
8248SMF15	0-26508 23870-7	19	6	299.00
8270	0-26508 15461-8	14	6	223.25
8272	0-26508 15462-5	14	6	234.10
8273	0-26508 18149-2	14	6	191.95
8274	0-26508 15544-8	14	6	180.00
8276	0-26508 16771-7	14	6	200.45
8277	0-26508 19906-0	16	6	203.10
8278	0-26508 16780-9	14	6	235.25
8278SM	0-26508 23871-4	19	6	235.25
8278SMF15	0-26508 23872-1	19	6	235.25
8279	0-26508 16781-6	14	6	254.55
8279SM	0-26508 23873-8	20	6	250.30
8279SMF15	0-26508 23874-5	20	6	250.30
8280	0-26508 15463-2	12	6	226.10
8281	0-26508 21457-2	15	6	295.30
8282	0-26508 20552-5	12	6	296.60
8283	0-26508 20553-2	12	6	278.05
8285	0-26508 16120-3	13	6	244.65
8286	0-26508 22450-2	15	6	247.60
8287	0-26508 16223-1	12	6	281.80
8289	0-26508 16224-8	13	6	300.30
8290	0-26508 15406-9	65	12	113.00
8290EP15	0-26508 21336-0	65	12	108.65
8292	0-26508 17218-6	65	12	117.90
CA8301	0-26508 21107-6	38	6	656.35
CA8302	0-26508 21108-3	38	6	647.70
CA8303	0-26508 21109-0	39	6	714.25
CA8304	0-26508 21110-6	39	6	737.45
8310	0-26508 00641-2	43	4	596.45
8310AC16	0-26508 16764-9	44	4	596.45
8310ACDF16	0-26508 20596-9	44	4	626.20
8310BPW16	0-26508 23919-3	51	2	555.05
8310BPW35	0-26508 23920-9	51	2	555.05
8310BPWR	0-26508 24015-1	51	3	401.30
8310DF16	0-26508 20597-6	43	4	626.20
8310M16	0-26508 23653-6	49	3	181.85
8310M35	0-26508 23654-3	49	3	181.85
8310M128	0-26508 23652-9	49	3	181.85
8310MR16	0-26508 23921-6	51	6	146.30
8310MR35	0-26508 23656-7	51	6	146.30
8310MR128	0-26508 23655-0	51	6	146.30
8310R16	0-26508 16032-9	45	8	499.10
8310RDF16	0-26508 20598-3	45	4	524.00
8311	0-26508 19907-7	43	4	596.45
8311AC12	0-26508 19909-1	44	4	596.45
8312	0-26508 15222-5	45	4	596.45
8312AC10	0-26508 16765-6	46	4	596.45
8312M0125	0-26508 23657-4	50	3	181.85
8312M05	0-26508 23658-1	50	3	181.85
8312M10	0-26508 23659-8	50	3	181.85
8312MR0125	0-26508 23660-4	51	6	146.30
8312MR05	0-26508 23661-1	51	6	146.30
8312MR10	0-26508 23662-8	51	6	146.30
8312R10	0-26508 16030-5	46	8	499.10
8313	0-26508 21321-6	44	4	598.20
8313M16	0-26508 23663-5	50	3	195.65
8314	0-26508 15223-2	46	6	596.45
8314M10	0-26508 23664-2	50	3	181.85
8315	0-26508 19908-4	45	4	596.45
8315AC05	0-26508 19910-7	46	4	596.45
8316	0-26508 20599-0	45	4	596.45
8316AC	0-26508 21322-3	46	4	596.45
8320	0-26508 01243-7	66	12	148.05
8325	0-26508 04040-9	61	12	161.70
8339	0-26508 04041-6	60	6	198.45
8341	0-26508 07825-9	58	1	615.55
T8341	0-26508 22855-5	58	1	317.15
8342	0-26508 07826-6	58	1	620.80
8342EP15	0-26508 21337-7	58	1	620.80

Model No.	UPC	Page Number	Case Qty.	List Price
T8342	0-26508 22856-2	58	1	322.85
T8342CBN	0-26508 23715-1	58	1	474.60
T8342EP15	0-26508 22857-9	58	1	322.85
T8342EP15CBN	0-26508 23716-8	58	1	474.60
T8342NH	0-26508 23717-5	58	1	315.05
T8342NHCBN	0-26508 23718-2	58	1	432.15
8343	0-26508 08313-0	56	1	637.60
T8343	0-26508 22858-6	56	1	341.15
T8343CBN	0-26508 23719-9	56	1	501.55
T8343EP15	0-26508 22859-3	56	1	341.15
T8343EP15CBN	0-26508 23762-5	56	1	501.55
T8343NH	0-26508 23763-2	56	1	333.40
T8343NHCBN	0-26508 23575-1	56	1	459.10
8346	0-26508 06334-7	59	4	440.75
8346EP15	0-26508 21338-4	59	4	440.75
T8346	0-26508 22860-9	59	4	297.95
T8346CBN	0-26508 23563-8	59	4	422.50
T8346EP15	0-26508 22861-6	59	4	297.95
T8346EP15CBN	0-26508 23564-5	59	4	422.50
8348	0-26508 05776-6	61	6	333.65
T8348	0-26508 22862-3	61	6	204.95
8349	0-26508 01509-4	64	6	71.45
8349CBN	0-26508 23703-8	64	6	104.05
8349EP15	0-26508 21339-1	64	6	71.45
8349EP15CBN	0-26508 23704-5	64	6	104.05
8349EP17	0-26508 22864-7	64	6	71.45
8349EP17CBN	0-26508 23705-2	64	6	104.05
8350	0-26508 01467-7	67	6	233.50
T8350	0-26508 21187-8	67	3	59.40
T8350CBN	0-26508 23706-9	67	3	107.50
8360	0-26508 08681-0	67	6	217.95
T8360	0-26508 22277-5	67	3	43.05
T8360CBN	0-26508 23565-2	67	3	78.65
8370	0-26508 01396-0	66	12	177.15
T8370	0-26508 21188-5	66	3	33.65
T8370CBN	0-26508 23566-9	66	3	61.50
8370HD	0-26508 22847-0	69	6	124.85
8371HD	0-26508 22848-7	69	6	150.30
8372HD	0-26508 22849-4	69	6	150.30
8373HD	0-26508 22850-0	69	6	150.30
8374HD	0-26508 22851-7	70	6	162.00
8375HD	0-26508 23980-3	70	6	150.30
8375	0-26508 04042-3	61	12	199.60
8375EP15	0-26508 21340-7	61	12	199.60
T8375	0-26508 21189-2	61	3	58.15
T8375CBN	0-26508 23567-6	61	3	89.45
T8375EP15	0-26508 22278-2	61	3	58.15
T8375EP15CBN	0-26508 23568-3	61	3	89.45
T8375NH	0-26508 23569-0	61	3	41.20
T8375NHCBN	0-26508 23570-6	61	3	68.90
8389	0-26508 04043-0	60	6	227.95
8389EP15	0-26508 21341-4	60	6	227.95
T8389	0-26508 21213-4	60	3	89.10
T8389CBN	0-26508 23571-3	60	3	139.15
T8389EP15	0-26508 22279-9	60	3	89.10
T8389EP15CBN	0-26508 23572-0	60	3	139.15
T8389NH	0-26508 23573-7	60	3	74.40
T8389NHCBN	0-26508 23574-4	60	3	108.95
8400	0-26508 01506-3	27	12	168.30
8413	0-26508 12971-5	8	3	160.70
8413F03	0-26508 23444-0	8	3	160.70
8413F05	0-26508 23445-7	8	3	160.70
8413F15	0-26508 23446-4	8	3	160.70
8414	0-26508 13712-3	8	3	191.80
8414BN	0-26508 15128-0	8	3	248.15
8416	0-26508 01727-2	9	3	172.65
8416F05	0-26508 23447-1	9	3	172.65
8417	0-26508 12972-2	9	6	222.05
8417F03	0-26508 23448-8	9	6	222.05
8417F05	0-26508 23449-5	9	6	222.05
8417F15	0-26508 23450-1	9	6	230.95
8418	0-26508 15080-1	9	6	233.40
8419	0-26508 16012-1	9	6	252.20
8419F05	0-26508 22784-8	9	6	252.20
8420	0-26508 01507-0	27	12	195.30
8420CBN	0-26508 23532-4	27	12	244.15
8422	0-26508 23212-5	27	12	176.60
8422CBN	0-26508 23533-1	27	12	220.80
8422F03	0-26508 23213-2	27	12	176.60
8422F05	0-26508 23214-9	27	12	176.60
8425	0-26508 01508-7	27	12	190.15
8430	0-26508 06645-4	28	12	131.60
8430CBN	0-26508 23534-8	28	12	164.60
8430F03	0-26508 23220-0	28	12	131.60
8430F05	0-26508 23215-6	28	12	131.60
8432	0-26508 06646-1	28	12	161.95
8434	0-26508 06647-8	28	12	156.10
8437	0-26508 23216-3	28	12	170.40
8437CBN	0-26508 23535-5	28	12	213.00
8439	0-26508 23217-0	28	12	140.10
8439CBN	0-26508 23536-2	28	12	175.20
8439F05	0-26508 01506-3	28	12	140.10
8551	0-26508 24990-1	35	6	660.95
8551AC	0-26508 24991-8	35	6	678.95
8552	0-26508 24992-5	36	6	730.45
8552AC	0-26508 24993-2	36	6	730.45
8553	0-26508 24994-9	36	6	660.95
8553AC	0-26508 24995-6	36	6	678.95
8554	0-26508 24996-3	36	6	730.45
8554AC	0-26508 24997-0	36	6	730.45
8701	0-26508 12973-9	13	6	138.75
8707	0-26508 20651-5	13	6	165.35
8711	0-26508 02028-9	13	6	207.40
8713	0-26508 02095-1	13	6	416.55
8714	0-26508 01593-3	13	6	429.40
8717	0-26508 23764-9	13	6	245.10
8780	0-26508 02185-9	30	6	112.45
8791	0-26508 12570-0	30	6	132.50
8792	0-26508 12571-7	31	6	256.65
8793	0-26508 01307-6	30	12	102.90
8798	0-26508 00393-0	30	6	180.25
8799	0-26508 01377-9	31	6	234.95
8800	0-26508 00777-8	28	6	156.15
8800CBN	0-26508 23537-9	28	6	191.50
8800F03	0-26508 23665-9	28	6	156.15
8800F05	0-26508 23531-7	28	6	156.15
8810	0-26508 00778-5	28	6	179.10
8820	0-26508 00779-2	28	6	184.55
8820CBN	0-26508 23538-6	28	6	226.30
8884	0-26508 09323-8	23	6	169.10
8886	0-26508 09324-5	24	6	311.65
8889	0-26508 09325-2	24	6	398.90
8894	0-26508 22067-2	24	6	191.95
8915	0-26508 09414-3	29	12	114.80
8915CBN	0-26508 23539-3	29	12	143.50
8917	0-26508 03032-5	29	12	135.35
8917CBN	0-26508 23540-9	29	12	169.25
8922	0-26508 03917-5	29	6	242.05
8922CBN	0-26508 23541-6	29	6	290.50
8924	0-26508 03920-5	29	6	259.00

Model No.	UPC	Page Number	Case Qty.	List Price
8930	0-26508 01308-3	29	12	87.75
8935	0-26508 01309-0	29	12	115.65
8938	0-26508 00395-4	32	6	155.75
8939	0-26508 01269-7	32	12	118.90
8940	0-26508 01376-2	33	6	222.55
8948	0-26508 06169-5	33	6	153.65
8957	0-26508 03026-4	32	12	119.95
8966	0-26508 01429-5	29	6	183.45
9220F05	0-26508 25539-1	6	3	310.65
9220F15	0-26508 25540-7	6	3	310.65
9223F05	0-26508 25730-2	6	3	345.15
9223F15	0-26508 25541-4	6	3	345.15
9263	0-26508 25542-1	65	12	70.65
9263EP15	0-26508 25543-8	65	12	70.65
T9342	0-26508 25733-3	57	1	452.65
T9342EP15	0-26508 25734-0	57	1	452.65
T9342GBM15	0-26508 25738-8	57	1	497.90
T9342GBM25	0-26508 25737-1	57	1	497.90
T9343	0-26508 25731-9	55	1	478.30
T9343EP15	0-26508 25732-6	55	1	478.30
T9343GBM15	0-26508 25736-4	56	1	526.15
T9343GBM25	0-26508 25735-7	56	1	526.15
T9346	0-26508 25554-4	59	4	398.75
T9346EP15	0-26508 25555-1	59	4	398.75
T9346GBM15	0-26508 25556-8	59	3	438.65
T9346GBM25	0-26508 25557-5	59	3	438.65
9349	0-26508 25544-5	64	6	104.00
9349EP15	0-26508 25545-2	64	6	104.00
T9360	0-26508 25558-2	66	3	122.15
T9370	0-26508 25559-9	66	3	95.45
T9375	0-26508 25560-5	61	3	119.45
T9375EP15	0-26508 25561-2	61	3	119.45
T9389	0-26508 25562-9	60	3	152.00
T9389EP15	0-26508 25563-6	60	3	152.00
9417F05	0-26508 25729-6	5	3	252.00
9417F15	0-26508 25546-9	5	3	252.00
9419	0-26508 25547-6	5	3	280.00
9419F05	0-26508 25548-3	5	3	280.00
22106	0-26508 01532-2	74	1	470.90
22119	0-26508 01546-9	75	1	108.05
22121	0-26508 02075-3	74	1	771.25
22122	0-26508 02076-0	74	1	674.90
22123	0-26508 02077-7	74	1	674.90
22124	0-26508 04066-9	74	1	443.25
22125	0-26508 04303-5	74	1	562.15
22127	0-26508 04306-6	75	1	240.30
22128	0-26508 04307-3	75	1	297.70
22129	0-26508 04308-0	75	1	339.70
22130	0-26508 04309-7	75	1	270.00
22131	0-26508 04310-3	75	1	270.00
22132	0-26508 04624-1	75	1	286.40
52100	0-26508 20763-5	25	1	79.20
52120	0-26508 20704-8	25	12	146.95
52124GBM25	0-26508 23411-2	62	3	224.90
52124GBM25CBN	0-26508 23412-9	62	3	461.05
52136GBM25	0-26508 19133-0	62	3	245.30
52136GBM25CBN	0-26508 19134-7	62	3	502.85
52224GBM15	0-26508 22696-4	62	3	230.00
52224GBM15CBN	0-26508 23697-0	62	3	471.55
52224GBM17	0-26508 22697-1	62	3	230.00
52224GBM17CBN	0-26508 23698-7	62	3	471.55
52224GBM25	0-26508 22699-5	62	3	230.00
52224GBM25CBN	0-26508 23699-4	62	3	471.55
52224GBP25	0-26508 22700-8	62	3	199.40
52236GBM15	0-26508 22701-5	62	3	250.40
52236GBM15CBN	0-26508 23700-7	62	3	512.35
52236GBM17	0-26508 22702-2	62	3	250.40
52236GBM17CBN	0-26508 23701-4	62	3	512.35
52236GBM25	0-26508 22704-6	62	3	250.40
52236GBM25CBN	0-26508 23702-1	62	3	512.35
52236GBP25	0-26508 22695-7	62	3	219.80
52600	0-26508 02620-5	76	50	15.60
52601	0-26508 02622-9	76	50	15.60
52602	0-26508 02625-0	76	50	16.80
52603	0-26508 02628-1	76	50	16.80
52608	0-26508 03039-4	76	50	15.60
52609	0-26508 02650-2	76	50	15.60
52610	0-26508 03040-0	76	50	16.80
52611	0-26508 03585-6	76	50	16.80
52612	0-26508 03589-4	76	50	15.60
52613	0-26508 03590-0	76	50	15.60
52614	0-26508 02785-1	76	50	16.80
52615	0-26508 02786-8	76	50	16.80
52620	0-26508 03597-9	76	20	24.55
52710	0-26508 06336-1	63	6	261.05
52710CBN	0-26508 23710-6	63	6	519.60
52710EP15	0-26508 21334-6	63	6	261.05
52710EP15CBN	0-26508 23714-4	63	6	519.60
52715	0-26508 20432-0	63	6	272.75
52716EP15	0-26508 21335-3	65	20	66.30
52740EP17	0-26508 22852-4	63	6	260.50
52748EP15	0-26508 23475-4	63	6	190.45
99550	0-26508 20765-9	10	12	28.40
104451	0-26508 19928-2	39	12	173.00
104465	0-26508 20436-8	70	12	136.55
S0000	0-26508 18146-1	21	12	46.30
S0001	0-26508 02531-4	21	12	55.70
S0002	0-26508 02532-1	21	12	56.90
S0003	0-26508 02533-8	21	12	55.70
S0004	0-26508 02534-5	21	12	66.90
S0006	0-26508 02536-9	21	12	42.40
S0007	0-26508 02537-6	21	12	56.90
S0009	0-26508 02539-0	21	12	61.35
S0010	0-26508 02540-6	21	12	66.90
S0011	0-26508 02541-3	21	12	55.70
S0012	0-26508 02542-0	21	12	121.60
S0020	0-26508 14811-2	21	12	56.90
S0030	0-26508 14812-9	21	12	62.45
S0050	0-26508 16071-8	21	12	69.15
S0060	0-26508 19927-5	21	12	85.90
S0070	0-26508 18147-8	21	12	74.75
S00R30	0-26508 20222-7	21	12	97.05
S00R50	0-26508 20223-4	21	12	104.80
SV003	0-26508 02544-4	21	12	114.85
SV006	0-26508 02547-5	21	12	107.05
SV010	0-26508 02551-2	21	12	112.65

Although descriptions are believed correct at publication approval, accuracy cannot be guaranteed.

Moen reserves the right to make product specification changes from time to time, without notice or obligation, and to change or discontinue models.

® 1255, Duralast, ENVI, LifeShine, M•PACT, Moen, the Moen waterdrop logo, Posi-Temp and Moentrol are registered trademarks of Moen Incorporated.

™ AccuSet, Durameter, M•BITION, M•DURA, M•POWER, M•PRESS, Secure Mount, SoundSHIELD and the design of the Moen 1222, 1224 and 1225 cartridges are trademarks of Moen Incorporated.

MIX
Paper from responsible sources
FSC® C012763

MOEN®
COMMERCIAL

Connect with us:
moen.com/social

Visit our web site at
moencommercial.com

U.S. Headquarters:
Moen Incorporated
25300 Al Moen Drive, North Olmsted, OH
44070-8022

1-800-BUY-MOEN

Canada Headquarters:
Moen
2816 Bristol Circle, Oakville, Ontario
L6H 5S7

1-800-465-6130



MF1415 50M-01/15-WYAG

© 2015 Moen Incorporated