



Buy it for looks. Buy it for life.®

Specifications

FAUCET DESCRIPTION

- Metal construction with various finishes identified by suffix
- Hydrolock® quick-connect installation
- Pullout spray with 68" braided hose
- 1/2" IPS connections will accept standard ball nose connection for 3/8" tubing

OPERATION

- Lever style handle
- Temperature controlled by 120° arc of handle travel
- Spout receptor rotation is 145°
- Will operate with less than 5 lbs. of force
- Operates in stream or spray mode in the pullout or retracted position

FLOW

- Flow is limited to 2.2 gpm max (8.3 L/min) at 60 psi

CARTRIDGE

- 1225 cartridge design
- Engineered polymers, non-ferrous and stainless steel materials


STANDARDS

- Designed and manufactured to comply with the requirements of: CSA B-125.1, ASME A112.18.1, NSF Section 9, and all applicable requirements referenced therein
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- The backflow protection system in the device consists of two independently operating check valves, a primary and a secondary which prevent backflow
- Contains no more than 0.25% weighted average lead content

- **ADA**  for lever handle

WARRANTY


- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

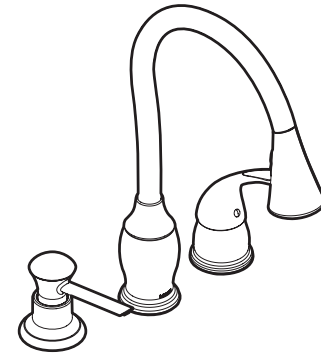

Single Control Kitchen Faucet

Models: CA87555 series
CA87556 series

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THRU 2 OR 3 HOLES, 1-1/4" (32mm) MIN. DIA.

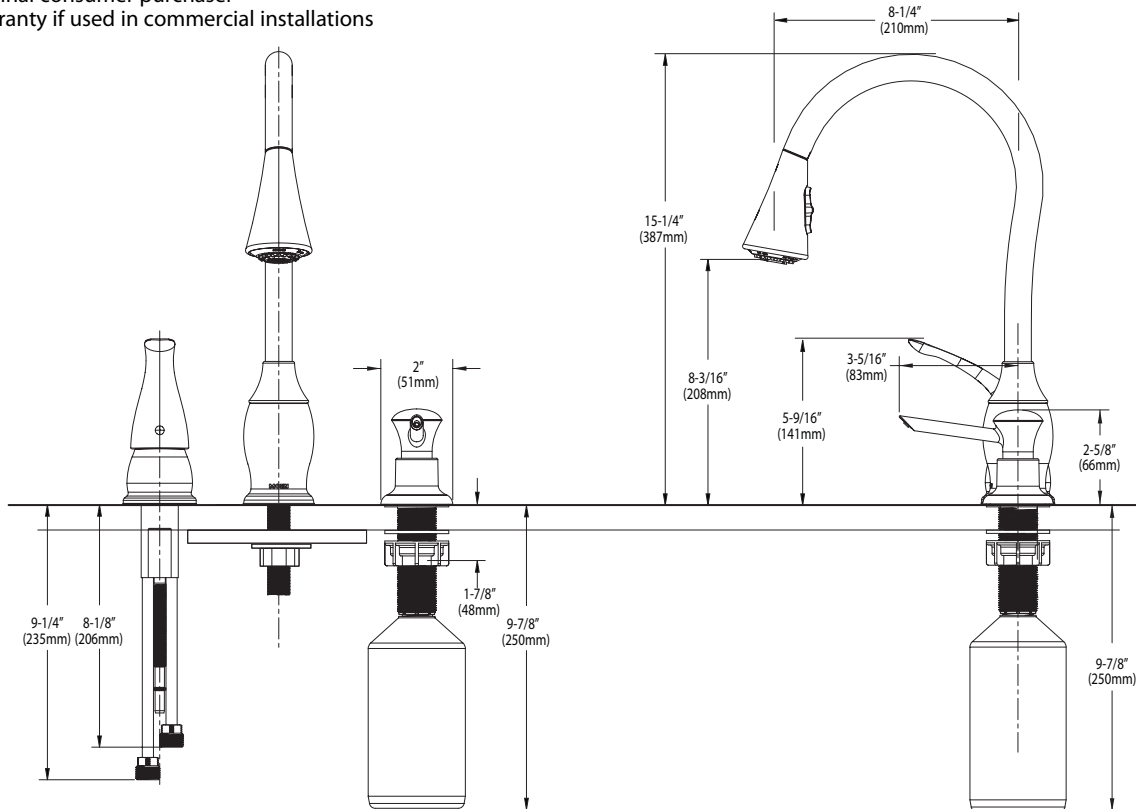

CRITICAL DIMENSIONS

(DO NOT SCALE)

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com